


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
05.1	Design Release	-	SEE ECN# 311652	KOR	12/02/24	EJH	12/02/24

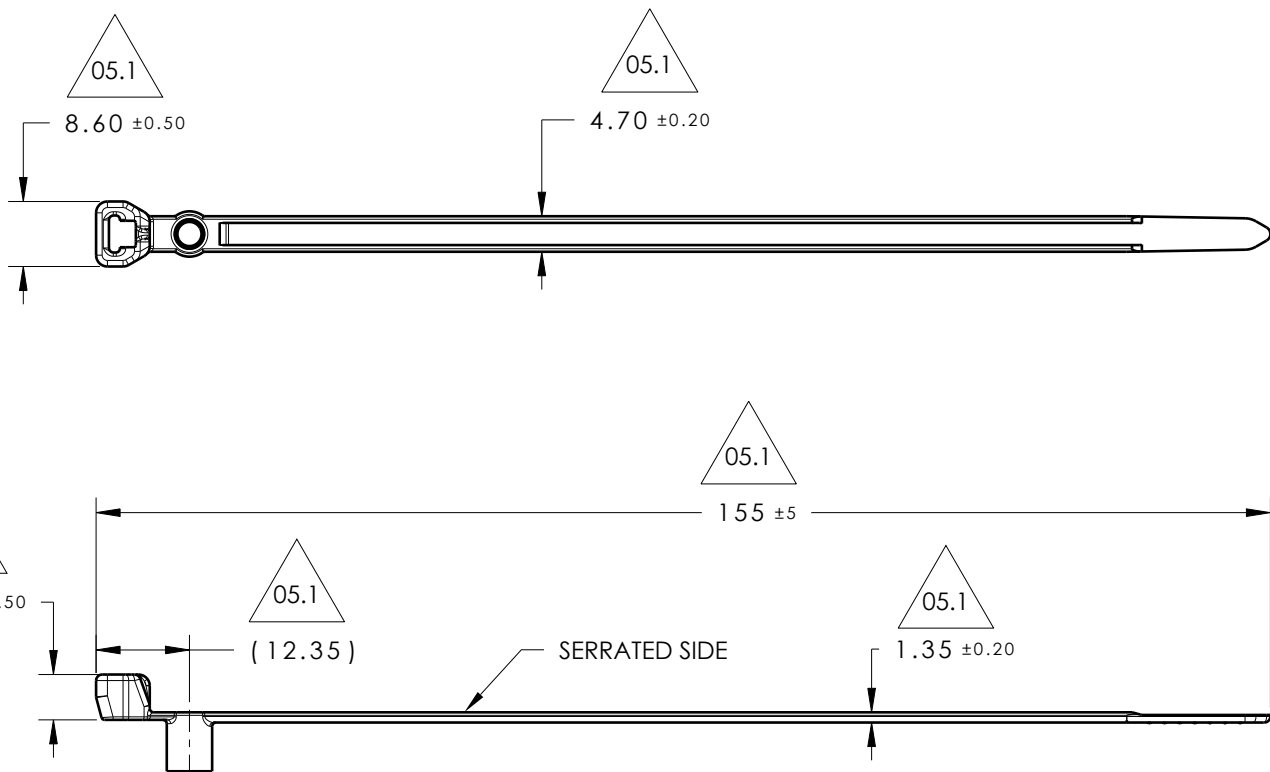

- REFERENCE:
PERFORMANCE REQUIREMENTS:
1. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
 2. BUNDLE RANGE: 2.0mm TO 35mm
 3. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 4. MAXIMUM ALLOWABLE FLASH TO BE: 0.5mm
 5. MAXIMUM ALLOWABLE MISMATCH TO BE: 01mm

GLOBAL PART DESCRIPTION	MATERIAL	COLOR
T50SVC-PA66HS-BK	PA66HS	BLACK

Material SEE CHART COLOR: SEE CHART	Units millimeters Tolerance defined on each dimension	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	2/10/15	Article/Type-No	T50SVC	Scale	1:1
			Approved	SJA	2/10/15	Title	T50SVC - SWIVEL CABLE TIE	Project Number	14-0606
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
						14-0606-001-CSU		Sheet	1/1