


CATIA V5



Revision Level

Drawing

State

Part

Revision Record

Changed

Date

Approved

Date

04.1

Design Release

-


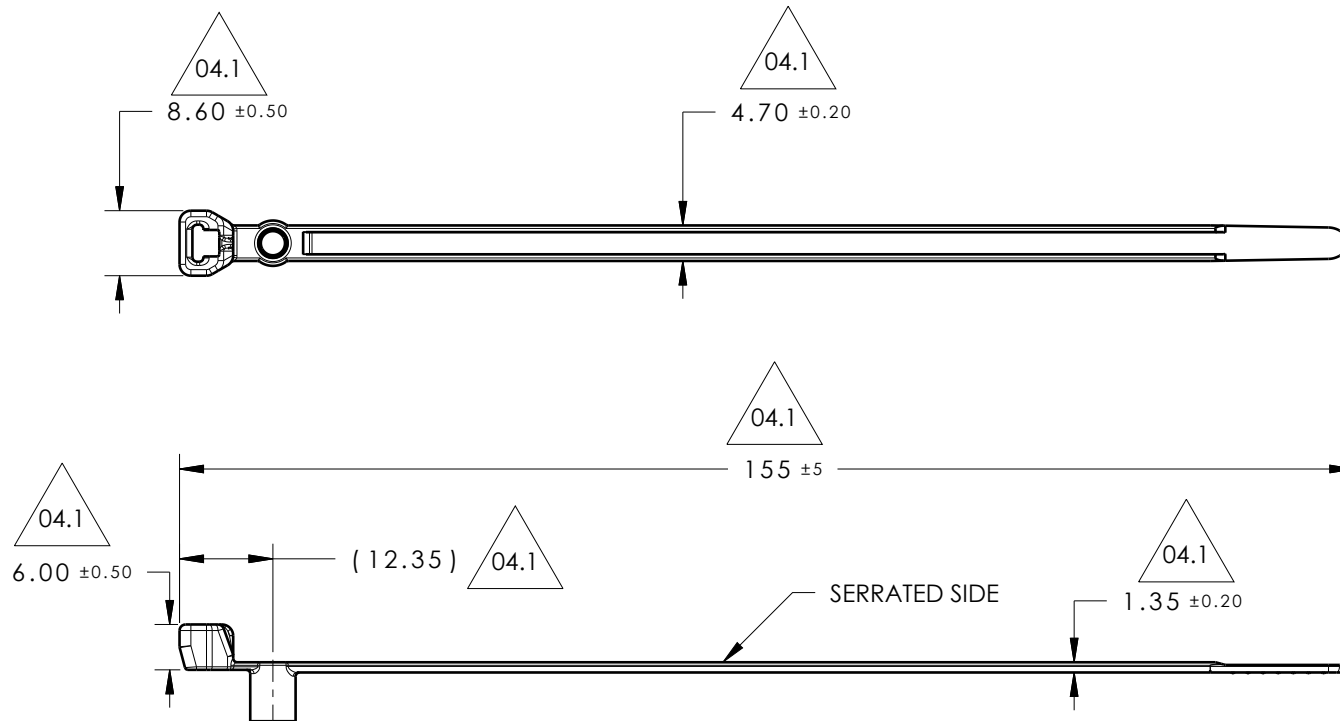
SEE ECN# 311652

KOR

12/03/24

EJH

12/03/24

ISOMETRIC VIEW
(SCALE 1:2)

REFERENCE:

PERFORMANCE REQUIREMENTS:

1. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
2. BUNDLE RANGE: 2.0 TO 35mm
3. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
4. MAXIMUM ALLOWABLE FLASH TO BE: 0.5mm
5. MAXIMUM ALLOWABLE MISMATCH TO BE: 01mm

GLOBAL PART
DESCRIPTION

MATERIAL

COLOR

T50SVC-PA66HIRHSUV-BK PA66HIRHSUV BLACK

Material
SEE CHART
COLOR: SEE CHART

Units millimeters

Tolerance defined on
each dimension

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn

NHK

03/07/18

Approved

EJH

03/07/18

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No T50SVC

Scale 1:1

Title
T50SVC - SWIVEL CABLE TIE

Project Number

14-0606

Drawing-No PRODUCTION : Phase

Format AH

14-0606-011-CSU

Sheet 1/1