






CATIA V5



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.1	Design Release	A	SEE ECN# 311356	SAR	07/23/24	EJH	07/23/24

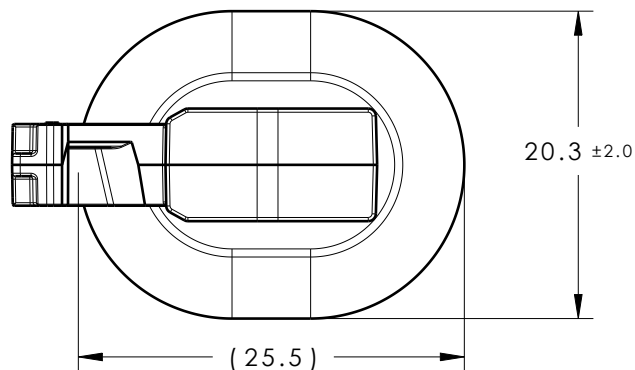

SCALE 1:1
ISOMETRIC VIEW

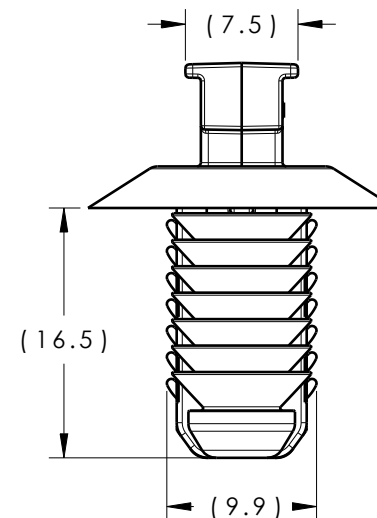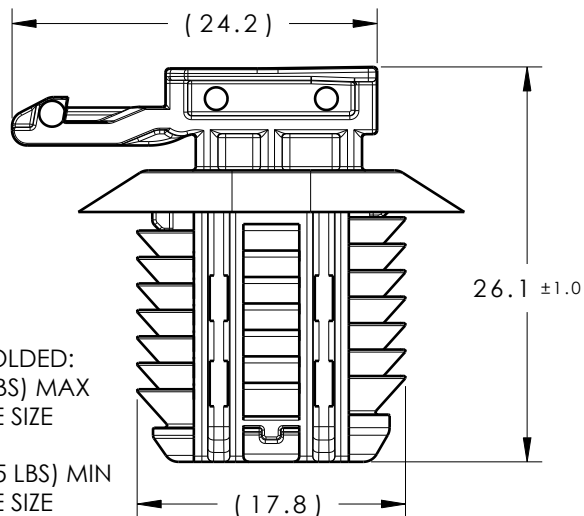

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN EACH APPLICABLE NOMINAL OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 155 NEWTONS (35 LBS) MIN IN EACH APPLICABLE NOMINAL OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 9.50mm
4. APPLICABLE OVAL HOLE SIZES:
A. 9.0 X 17.0mm +/- 0.4
5. DESIGNED TO MEET PUSH ON/ PULL OFF FORCES OF SAE/USCAR-2
6. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-7 (NOT A TEST SPEC.)

Material PA66HIRHSUV COLOR: BLACK	<div><div></div><div>01.1</div></div>	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	07/21/14	Article/Type-No	CC20	Scale	2:1			
				Approved	KVH	07/21/14	Title	OVAL FIR TREE 9mm X 17mm LG WITH 7mm CONNECTOR TOP	Project Number	14-0609			
				Tolerance defined on each dimension			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
										14-0609-021-CSU			Sheet

