


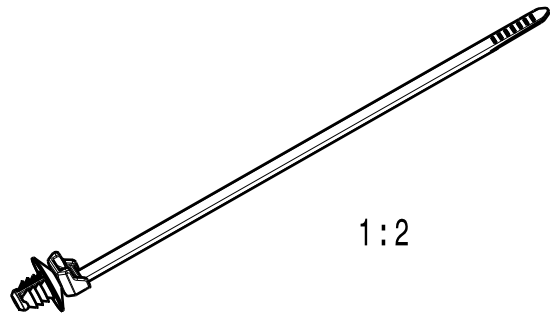




1:2

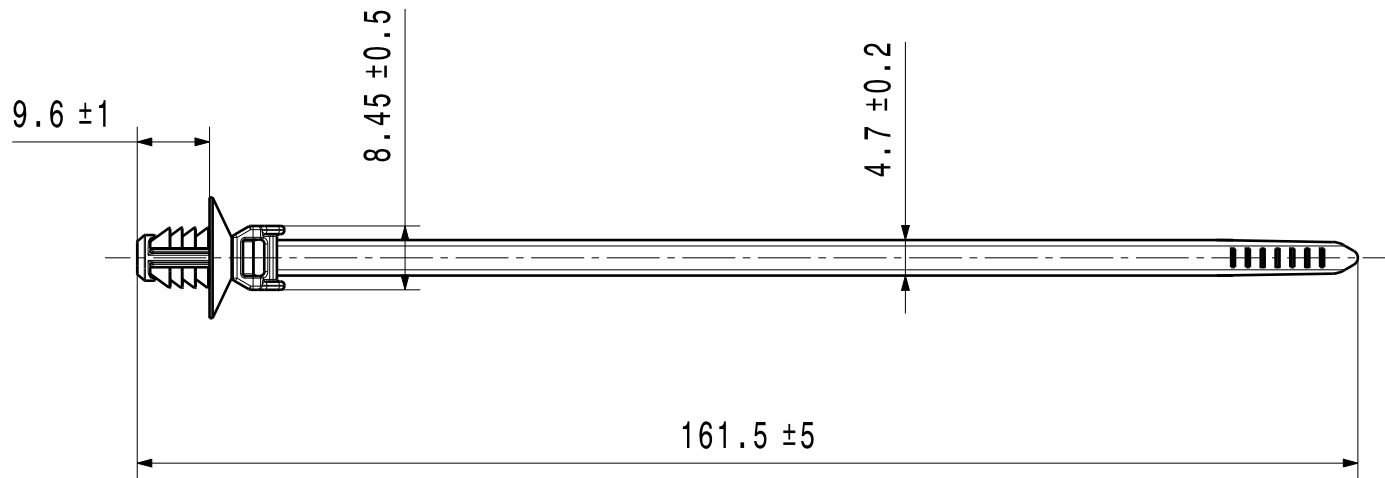

Printed copy for information only/
Ausdruck nur zur Information

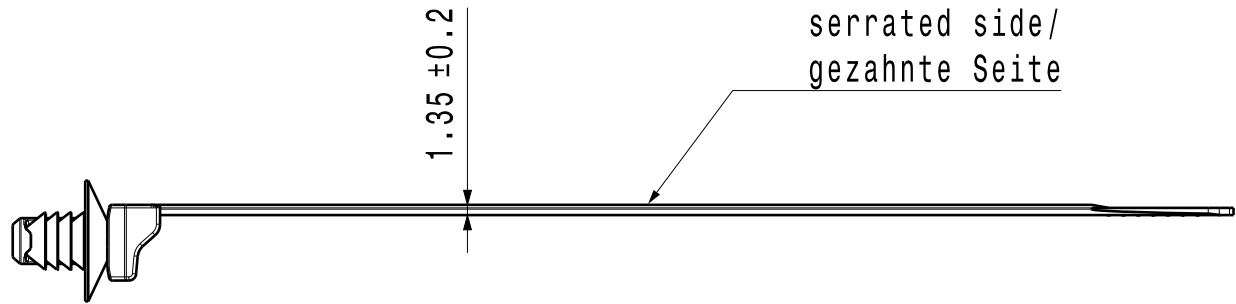

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
- Material: PA6.6 HIRHS
- Material color: black
- Bundle Ø: 1 - 35 mm
- Tensile force: 150 N
- Hole size: 6,5 ±0,4 mm
- Panel thickness: 0,7 - 3,5 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
- Material: PA6.6 HIRHS
- Material Farbe: schwarz
- Buendel Ø: 1 - 35 mm
- Schlaufenhaltekraft: 150 N
- Loch Ø: 6,5 ±0,4 mm
- Blechdicke: 0,7 - 3,5 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)								
Drawing	State		Part	Drawing frame updated			All drawing revisions are stored in CAD PDM database	Units mm	A. Hiller		2016/04/14		Title T50SOSFT6-E3		Scale 1:1			
01.4	Design Release		1.0						Approved		Date (YYYY/MM/DD)				Global Project Number 14-0904			
Changed		Date (YYYY/MM/DD)							S. Wulf		2016/04/14							
C. Cordts		2022/06/07							HellermannTyton www.HellermannTyton.com						Drawing-No 14-0904-003-CSG		Format A3	
Approved		Date (YYYY/MM/DD)													Sheet 1 / 1			
S. Maschmann		2022/06/07																