

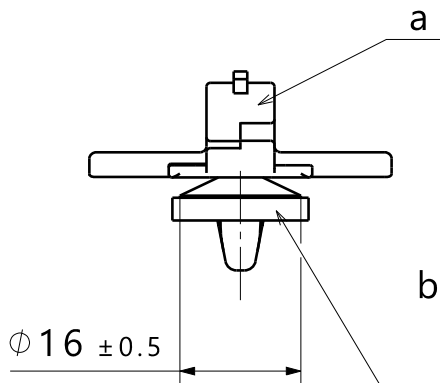
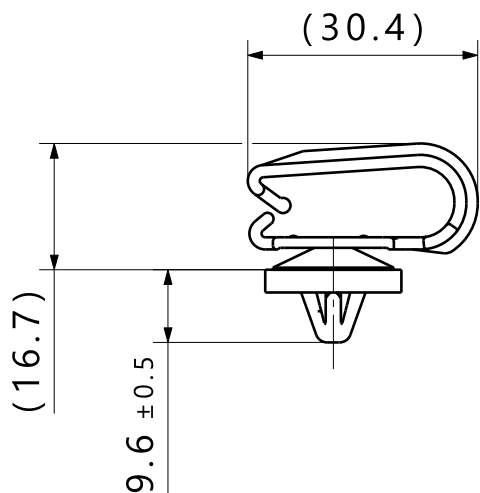


Possible execution variant permitted/
Moegliche Ausfuehrungsvariante zulaessig

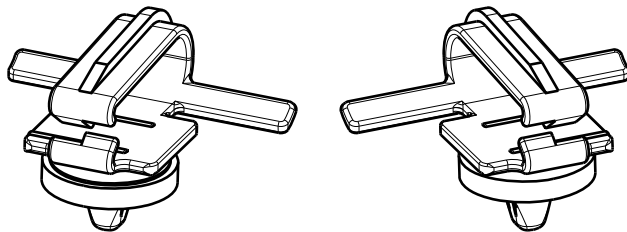

b: Cellular rubber seal glued/
Zellgummidichtung geklebt
02-0473-003-CSG

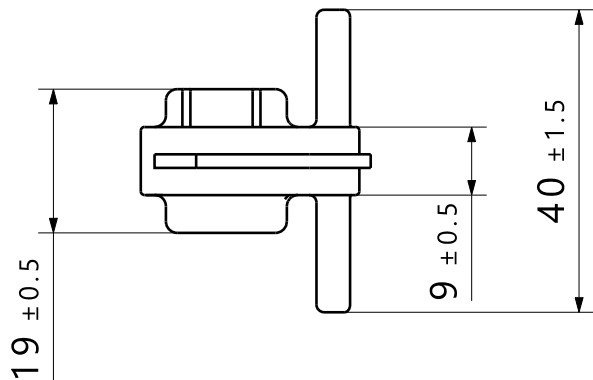

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Material: a: PA6.6
- Hole size: 6.5 +0.2 mm
- Panel thickness: 0.7 - 1.8 mm

Spezifikation:

- Material: a: PA6.6
- Loch Ø: 6.5 +0.2 mm
- Blechdicke: 0.7 - 1.8 mm

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Durch das Herstellverfahren bedingte
Geometrieaenderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben
dem Hersteller ueberlassen.

Revision Level			Revision Record		 	Drawn		Date (YYYY/MM/DD)	Title				Scale	
Drawing	State		Part	Drawing No of cellular rubber seal was 14.1871, Drawing frame changed		Villbrandt		2008/03/20					1:1	
02.1	Design Release		02			Approved		Date (YYYY/MM/DD)	Global Project Number					
Changed		Date (YYYY/MM/DD)				Spiesz		2008/03/20	NT 494-02					
I. Langeloh		2021/06/29							Format					
Approved		Date (YYYY/MM/DD)		Units		HellermannTyton		Drawing-No		A3				
B. Schiwek		2021/06/29								Sheet				
						mm		www.HellermannTyton.com		14.2119		1 / 1		