



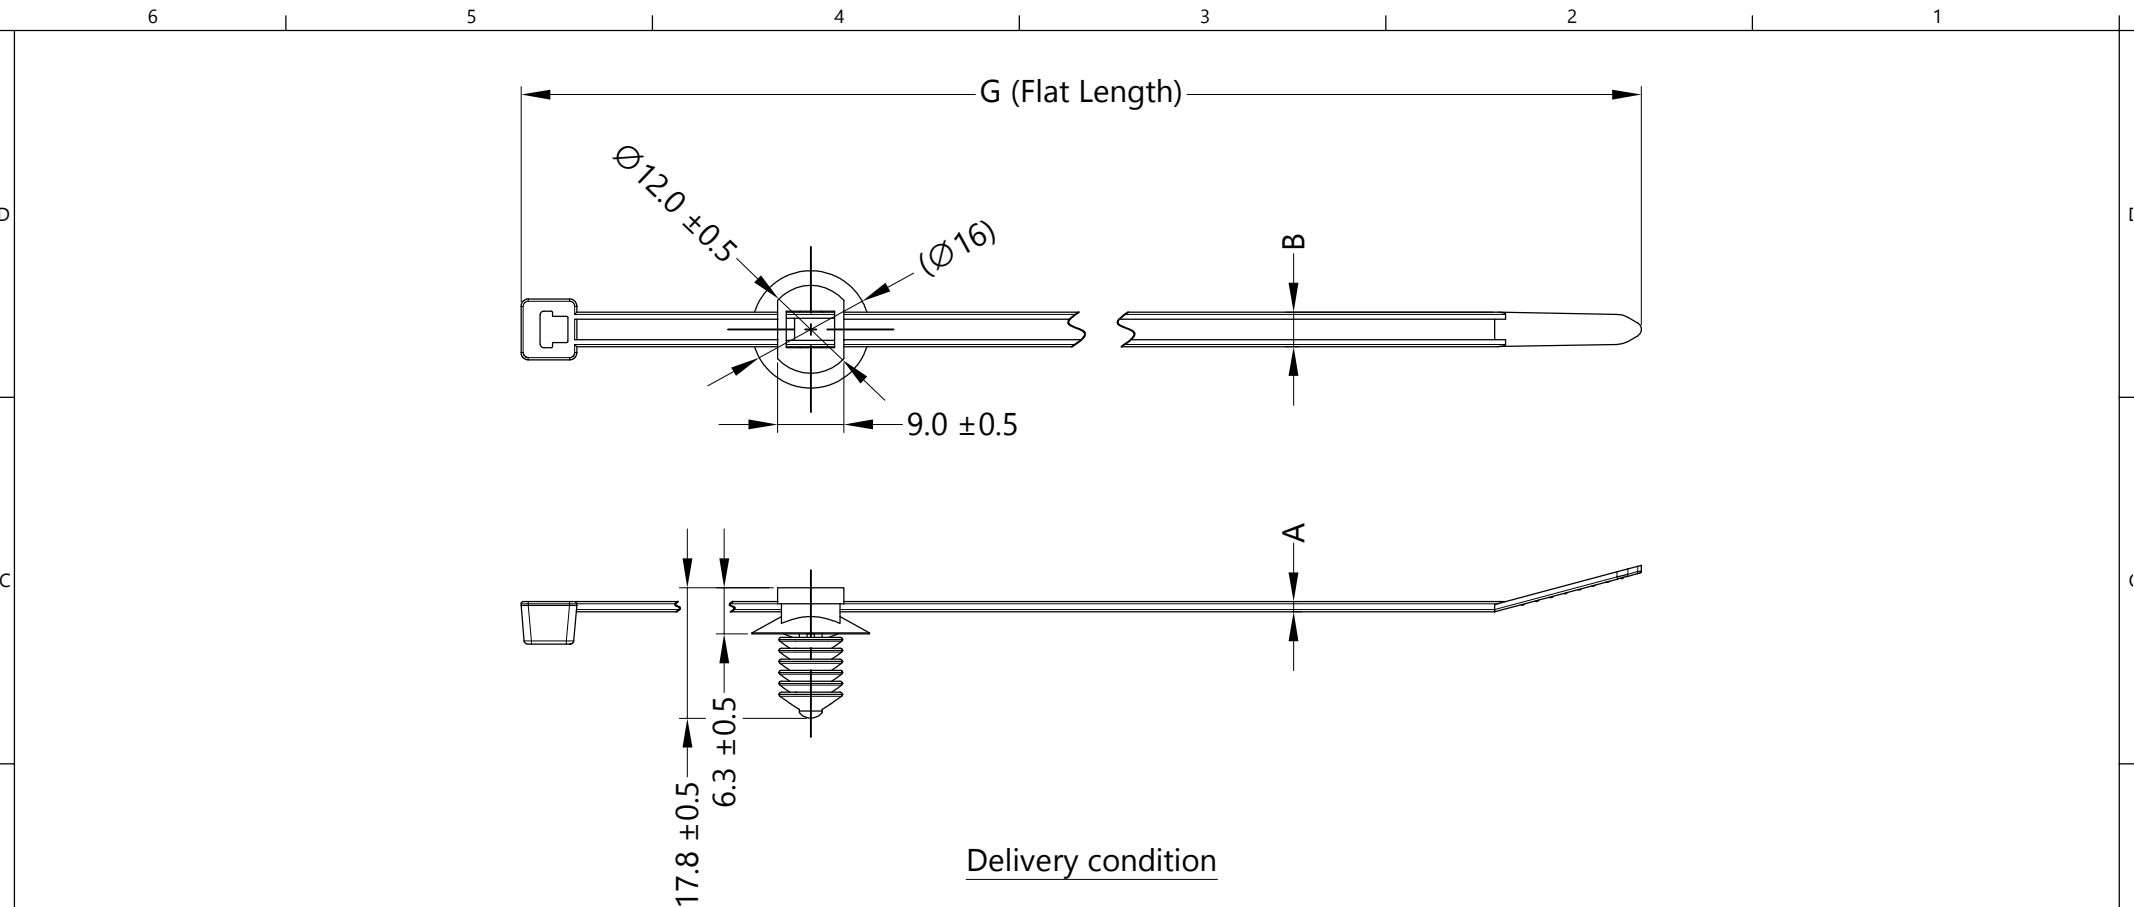


Delivery condition

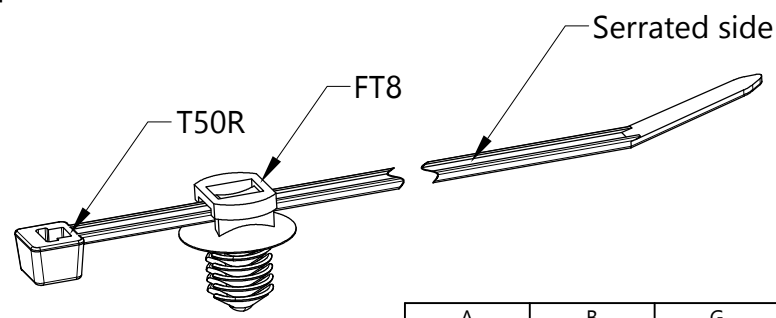

Reference:
1. Cable tie min loop tensile strength 225 newtons (50 lbf)

Notes:
Material: PA 66
Applicable hole size: $\text{Ø}7.7 \sim \text{Ø}8$ mm
Steel metal thickness range: 0.8 - 6mm

A	B	G
1.2 $\pm$ 0.2	4.6 $\pm$ 0.2	202 $\pm$ 11

Revision Level			Revision Record						
Drawing	State	Part	ECN #SG08018-04						
00.0	Released	.	 The copyright of this drawing is reserved by HellermannTyton.			Drawn	Date (YYYY/MM/DD)		
Changed Date (YYYY/MM/DD) Simon Ng 2020/12/09		Approved				Date (YYYY/MM/DD)	Title T50RFT8		Scale 1 : 1
		Edward Tan 2020/12/09		Global Project Number 15-0239					
Approved Date (YYYY/MM/DD) Edward Tan 2020/12/09		All drawing revisions are stored in CAD PDM database		Units mm		Drawing-No 15-0239-002-CSH		Format A4	
				www.HellermannTyton.com				Sheet 1 / 1	