





Revision Level			Revision Record C	Changed	Date	Approved	Date
Drawing	State	Part	TREVISION RECORD	Changed	Date	прргочес	Bute
03.1	3.1 Design Release		SEE ECN# 014162	CJR	11/06/17	EJH	11/06/17

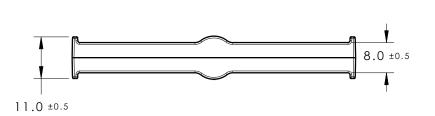

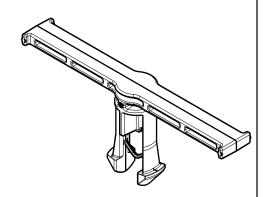

ISOMETRIC VIEW

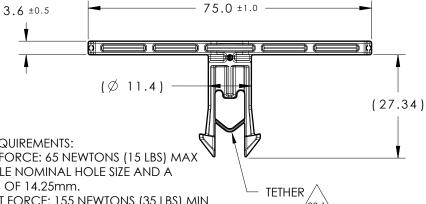

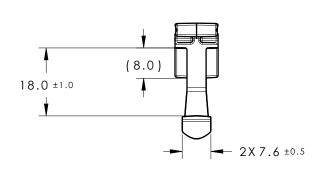

REFERENCE:

PERFORMANCE REQUIREMENTS:

1. MOUNT PUSH IN FORCE: 65 NEWTONS (15 LBS) MAX IN THE APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 14.25mm.

2. MOUNT PULL OUT FORCE: 155 NEWTONS (35 LBS) MIN IN THE APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 14.25mm.

- 3. SHEET METAL THICKNESS RANGE: 13.5mm 15.0mm
- 4. APPLICABLE HOLE SIZE:

A. 12.35mm +/-0.65

- 5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
- 6. MAX ALLOWABLE FLASH OR MISMATCH TO BE: 0.5mm
- 7. IF THE TETHER IS FRACTURES THE PART WILL STILL / FUNCTION AS INTENDED.

Material	Units	millimeters
UR0PPSFX32T4		_
COLOR: SILVER		nce defined on h dimension
	l	1

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Hellermann Tyton					
Approved	SJA	6/18/15			
Drawn	CJR	6/18/15			

North America Email: corp@htamericas.com Web: www.hellermann.tyton.com

	15-0362-011-CSU			Sheet	1/1
	Drawing-No			Format	AH
	TRANSMISSION MOUNT WITH TAPE BAR			15-0362	
5	Title TDANIONIONIONI MOLINITINI TABE BAR			Project Nu	ımber
j	Article/Type-No	BCATC4/ 151	-02177	Scale	1:1