




Printed copy for information only/
Ausdruck nur zur Information

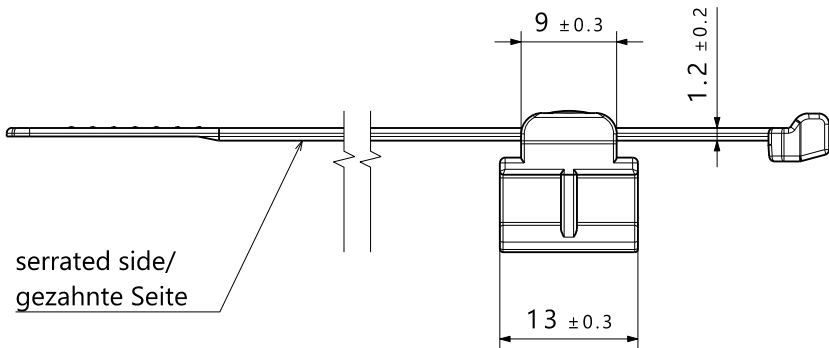

Metal clamp 15-0124-004-CSG
fit to material thickness 0.5-2.5 mm/
Blechklammer 15-0124-004-CSG
passend fuer Materialdicke 0.5-2.5 mm

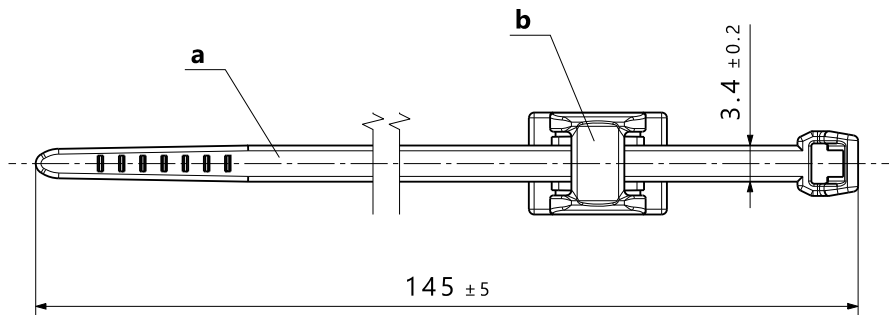

- Specification:
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 heatstabilized b: PA6.6 heatstabilized impact modified
 - Material color: a: black b: black
 - Bundle Ø: 1.5 - 30 mm
 - Tensile force: min. 133 N min.

- Spezifikation:
- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 hitzestabilisiert b: PA6.6 hitzestabilisiert schlagzaeh mod.
 - Material Farbe: a: schwarz b: schwarz
 - Buendel Ø: 1.5 - 30 mm
 - Schlaufenhaltekraft: min. 133 N

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Product type/ Artikelbezeichnung	Project no./ Projektnr.	Project no./ Projektnr.	
		Semi-finished part/ Halbfabrikat	Project no./ Projektnr.
T30ROSEC0.5-2.5TV-SD	GPN 15-0644	a	NT 822-99
		b	NT 527-07

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title			Scale			
Drawing	State	Part						I. Langeloh	2022/07/04							
00.3	Design Release							Approved	Date (YYYY/MM/DD)	C. Cordts	2022/07/04	T30ROSEC0.5-2.5TV-SD		2:1		
Changed	Date (YYYY/MM/DD)							All drawing revisions are stored in CAD PDM database		Units		HellermannTyton www.HellermannTyton.com		Global Project Number		
Approved	Date (YYYY/MM/DD)		mm		Drawing-No		15-0644									
					15-0644-001-CSG		Format A2									
									Sheet 1 / 1							