

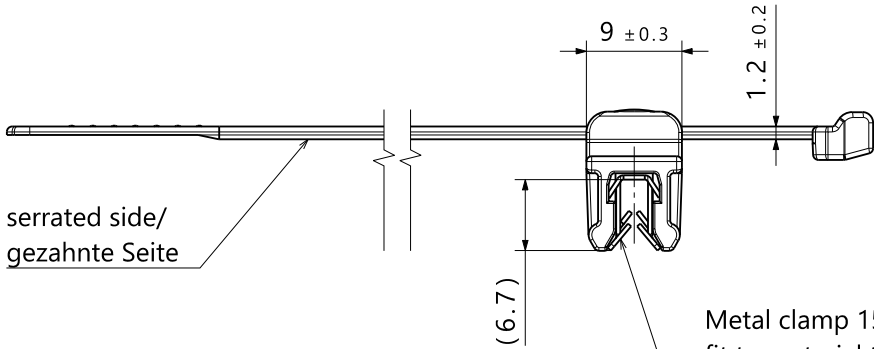


1:1

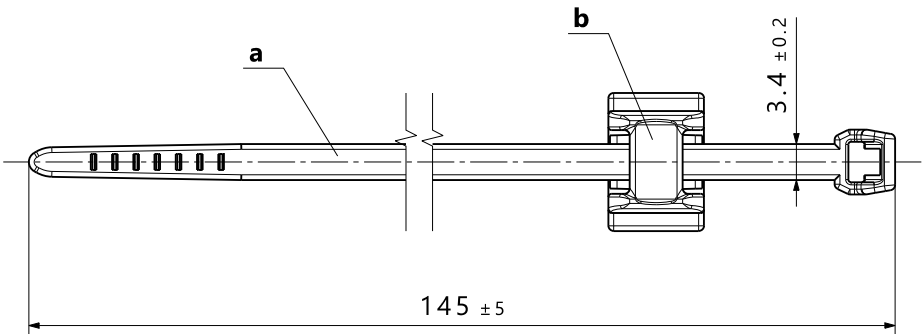

serrated side/
gezahnte Seite

Metal clamp 15-0124-004-CSG
fit to material thickness 0.5-2.5 mm/
Blechklammer 15-0124-004-CSG
passend fuer Materialdicke 0.5-2.5 mm

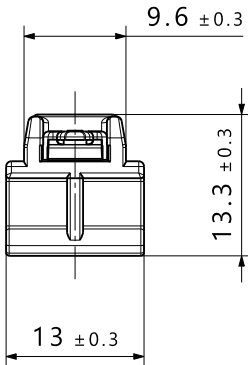

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	a: PA6.6	- Material:	a: PA6.6
	heatstabilized		hitze stabilisiert
	b: PA6.6		b: PA6.6
- Material color:	a: black	- Material Farbe:	a: schwarz
	b: black		b: schwarz
- Bundle Ø:	1.5 - 30 mm	- Buendel Ø:	1.5 - 30 mm
- Tensile force:	min. 133 N min.	- Schlaufenhalte kraft:	min. 133 N

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Semi-finished part/ Halbfabrikat	Project no./ Projektnr.	NT 822-99	NT 615-08
	a	T30ROS	EC0.5-2.5TP-SD
Product type/ Artikelbezeichnung		Project no./ Projektnr.	
T30ROSEC0.5-2.5TP-SD		GPN 15-0645	X X

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title T30ROSEC0.5-2.5TP-SD			Scale 2:1
Drawing	State	Part						I. Langeloh	2022/07/04				Global Project Number 15-0645
00.2	Design Release							Approved	Date (YYYY/MM/DD)	C. Cordts	2022/07/04	Format A2	
Changed	Date (YYYY/MM/DD)					All drawing revisions are stored in CAD PDM database		Drawing-No 15-0645-001-CSG			Sheet 1 / 1		
Approved	Date (YYYY/MM/DD)										Units mm	www.HellermannTyton.com	