



SW



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
11.1	Desing Release	A	SEE ECN# 016397	JMC	03/25/21	GJD	03/25/21

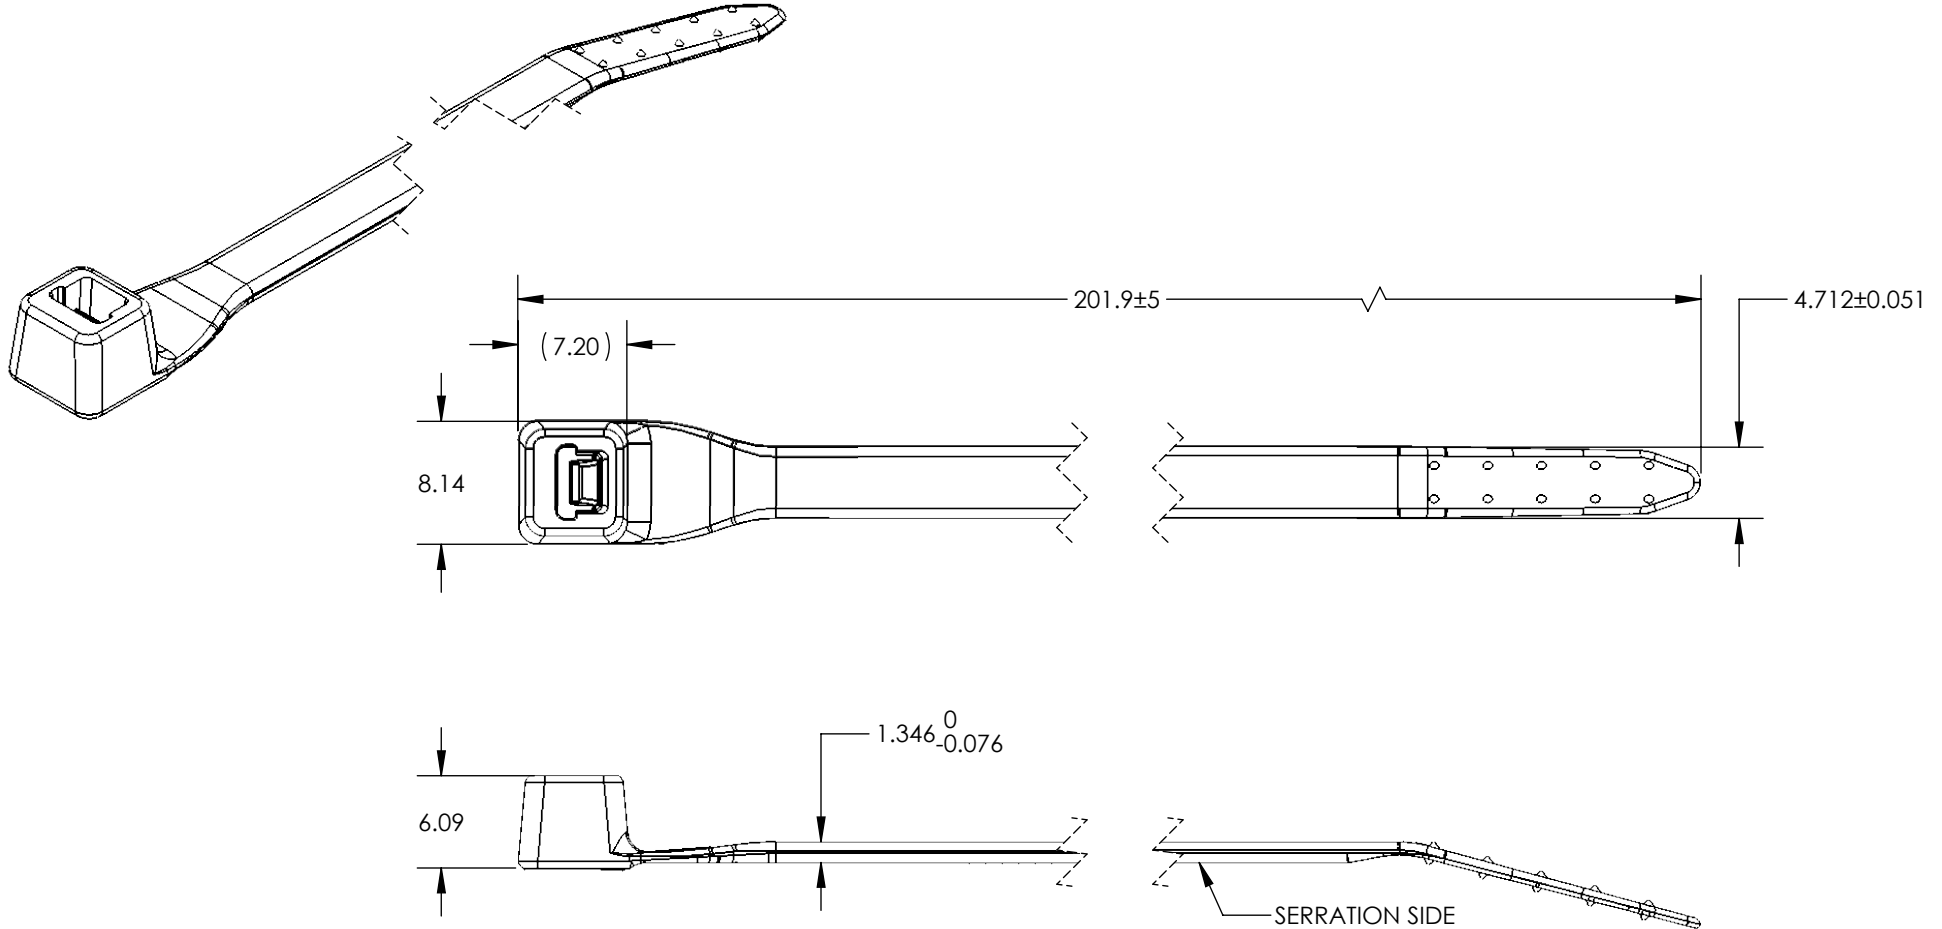

REFERENCE:

PERFORMANCE REQUIREMENTS:

1. CABLE TIE MIN. LOOP TENSILE STRENGTH: 225 NEWTONS (50lbs) MIN
2. TOOL APPLICATION TENSION: 138 NEWTONS (31lbs) MAX
3. BUNDLE RANGE AT MAXIMUM TENSION: 2.0mm TO 44.5mm
4. OPERATING BUNDLE RANGE: 2.0mm TO 50.0mm
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
6. MAX ALLOWABLE FLASH OR MISMATCH TO BE: .1mm

Material SEE CHART	Units: millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GAL	8/31/2016	Article/Type-No	T50RPPS	Scale	2:1
	Dimension without tolerances details to: .xxx = ±.013 .xx = ±.13 .x = ±.3 None = ±.8 ∠ = ±0.5° Dimension Formatted mm/[in]		Approved	GGG	8/31/2016	Title	T50R STANDARD CABLE TIE	Project Number	PRP 15-0875
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	Production : Phase	Format	AH
							15-0875-003-CSU	Sheet	1/1