

CATIA V5



REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm.
3. SHEET METAL THICKNESS RANGE: 0.60mm - 6.75mm
4. APPLICABLE OVAL HOLE SIZES:

- A. 6.2 X 12.2mm
- B. 6.5 X 12.5mm
- C. 6.5 X 13.0mm
- D. 7.0 X 12.0mm

5. FITS USCAR MATING HOLE EWCAP -007 (NOT A TEST SPEC.)

NOTES:

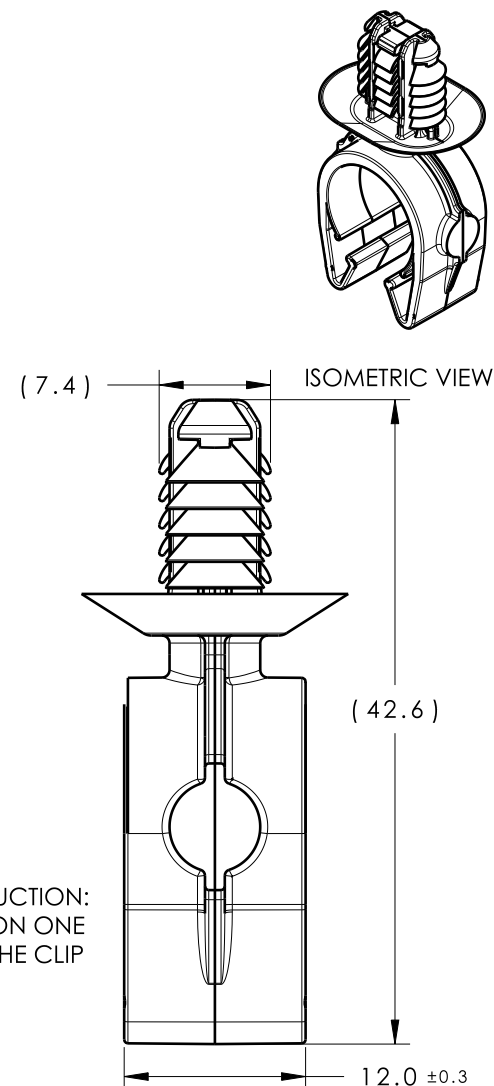
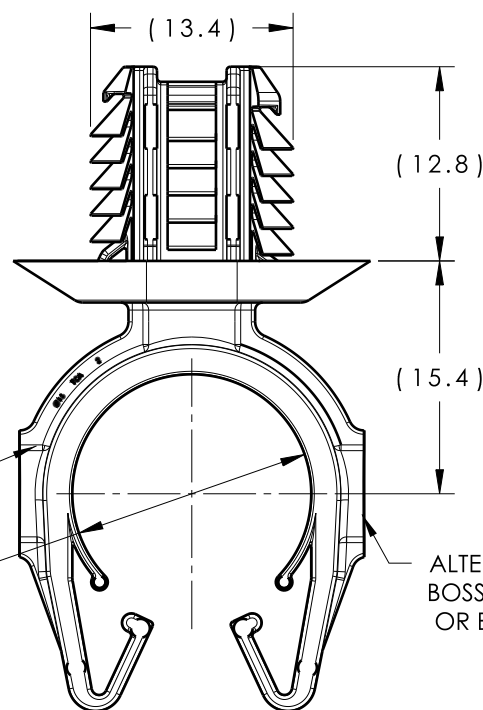
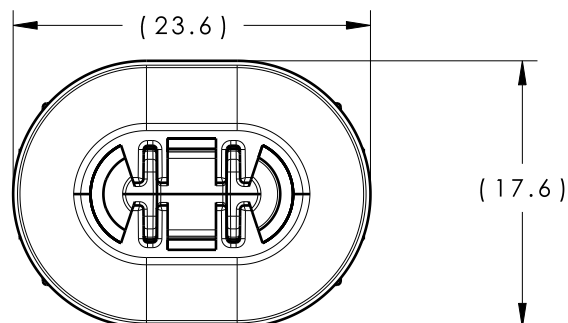
1. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
2. MAX ALLOWABLE FLASH TO BE 0.25mm.
3. MAX ALLOWABLE MISMATCH TO BE 0.1mm.

PATENTS: US D822,476 S, EU 003864313, CN 304373914 S

02.1

CAVITY ID, DIAMETER, AND 'TCA' TO BE SHOWN ON THIS SURFACE

Ø 15.80 ±0.20

ALTERNATE CONSTRUCTION:
BOSS MAY APPEAR ON ONE
OR BOTH SIDES OF THE CLIP

DIAMETER RANGE

HARNESS	HOSE	HARD PIPE/TUBE
14.0MM-17.0MM	14.0MM-17.0MM	15.9MM-18.3MM

02.1

Material
SEE CHART
COLOR: SEE CHART

02.1

Units millimeters

Tolerance defined on
each dimension

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn CRB 08/22/16
Approved EJH 09/28/16

HellermannTyton

North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

GLOBAL PART DESCRIPTION	MATERIAL	COLOR
MOC16FTOVAL-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK
Article/Type-No MOC16FTOVAL	Scale 2:1	
Title 16MM (5/8") MOC WITH 6.5 X 12.5MM OVAL FIR TREE	Project Number 16-0321	
Drawing-No PRODUCTION Phase 02.1	Format AH	
16-0321-010-CSU	Sheet 1/1	