
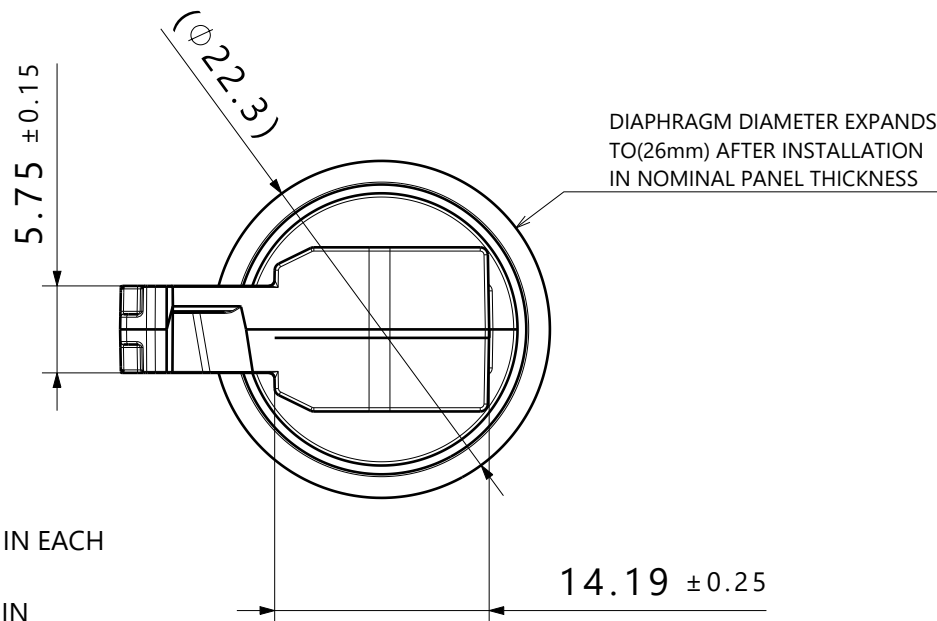
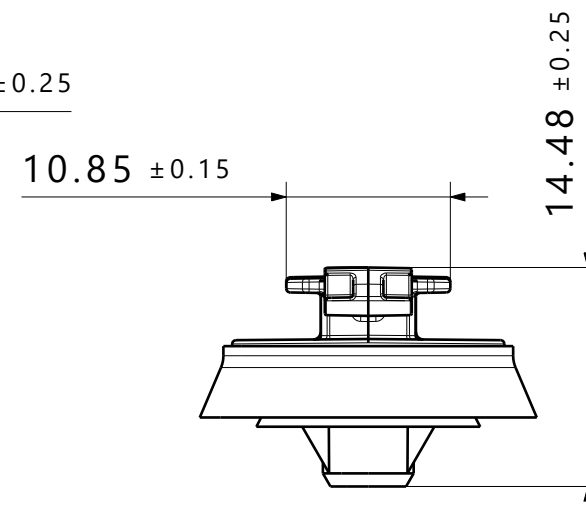


ISOMETRIC VIEW

REFERENCE:

PERFORMANCEREQUIREMENTS AT DRY AS MOLDED:


1. ARROWHEAD PUSH IN FORCE: 45 NEWTONS (10 LBS)MAX IN EACH APPLICABLE HOLE SIZE AND A PLATE THICKNESS OF 0.8mm.
2. ARROWHEAD PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN EACH APPLICABLE HOLE SIZE AND A PLATE THICKNESS OF 0.8mm
3. SHEET METAL THICKNESS RANGE: 0.60mm - 1.1mm
4. APPLICABLE HOLE SIZES:
 - A. 6.5mm +/-0.4mm
 - B. 6.35mm HEX +/-0.2mm
5. SEAL REQUIREMENTS OF SAE/USCAR-44
6. DESIGN TO MEET STATIC & HIGH PRESSURE SPRAY OF SAE/USCAR-2
7. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-11 (NOT A TEST SPEC.)
8. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25% PA66 ONLY
9. MAX ALLOWABLE MISMATCH TO BE: 0.1mm
10. FLASH PERMISSIBLE IF PART PERFORMANCE IS NOT AFFECTED

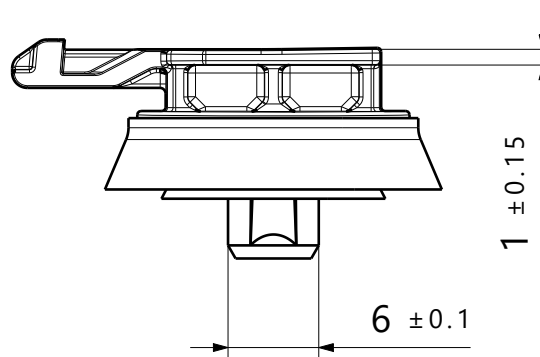

Global Part Description	MATERIAL	COLOR
SRAH6.5CC-PA66HIRHS/TPE-BK	PA66HIRHS/TPE	BLACK

Revision Level		
Drawing	State	Part
00.0	Design Release	
Changed	Date (YYYY/MM/DD)	
Approved	Date (YYYY/MM/DD)	

Revision Record	



The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
Yancey.Yu	2021/09/14
Approved	Date (YYYY/MM/DD)
Roger.Chang	2021/09/14

HellermannTyton
www.HellermannTyton.com

Title	Scale
SRAH6.5CC	1:2
Drawing-No	Global Project Number
16-0348-031-CSC	16-0348
Sheet	Format
1 / 1	A4