







CATIA V5

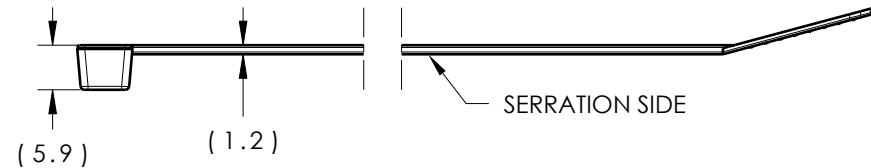


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.2	Design Release		SEE ECN# 013882	RJE	05/25/17	EJH	05/25/17

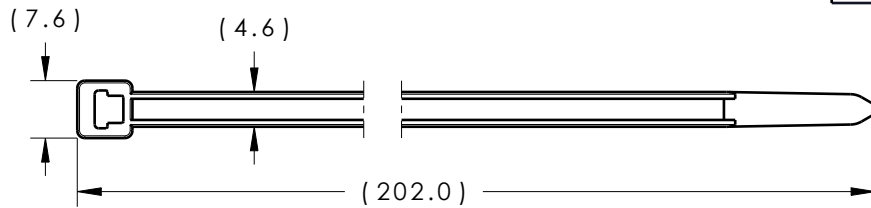

T50R
DELIVERY CONDITION: UNASSEMBLED SET

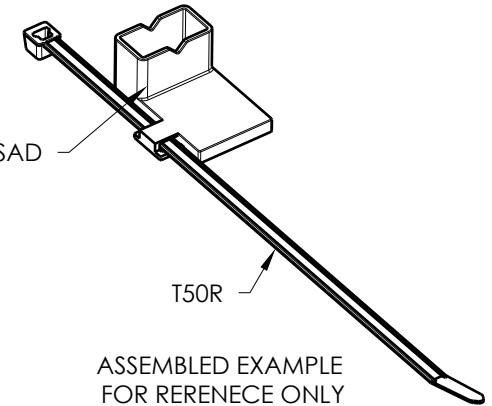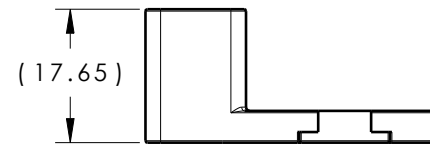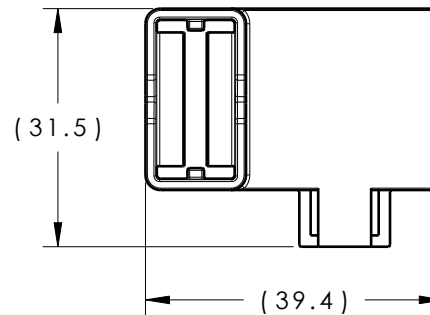

ASSEMBLED EXAMPLE
FOR RERENECE ONLY
SCALE 1:2



M5-6SLOTSMSAD
DELIVERY CONDITION: UNASSEMBLED SET

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. STUD MOUNT PUSH ON FORCE: 45 NEWTONS (10 LBS) MAX ON EACH APPLICABLE STUD SIZE
2. STUD MOUNT PULL OFF FORCE: 110 NEWTONS (25 LBS) MIN ON EACH APPLICABLE STUD SIZE
3. APPLICABLE STUD SIZE:
 - A. M5 X 0.8
 - B. T5
 - C. M6 X 1
4. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
5. MAX ALLOWABLE FLASH OR MISMATCH TO BE: 0.25mm

TYPE	BUNDLE RANGE	LOOP TENSILE STRENGTH	CABLE TIES		MOUNT	
			DRAWING	MATERIAL	DRAWING	MATERIAL
T50RM5-6SLOTSMSET/ 156-01652	5 TO 50	225 N (50LBS)	CT2050007CST	PA66HS	16-0379-001-CSU	PA66HIRHS

Material SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	7/14/16	Article/Type-No	SEE CHART	Scale	1:1
	Tolerance defined on each dimension	Approved		SJA	7/14/16	Title	T50R CABLE TIE WITH RECTANGULAR STUD MOUNT WITH SADDLE MOUNT	Project Number	16-0379	
		HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH		
					16-0379-101-CSU		Sheet	1/1		