



SW2014



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013462	GRW	6/1/2016	KAC	6/1/2016

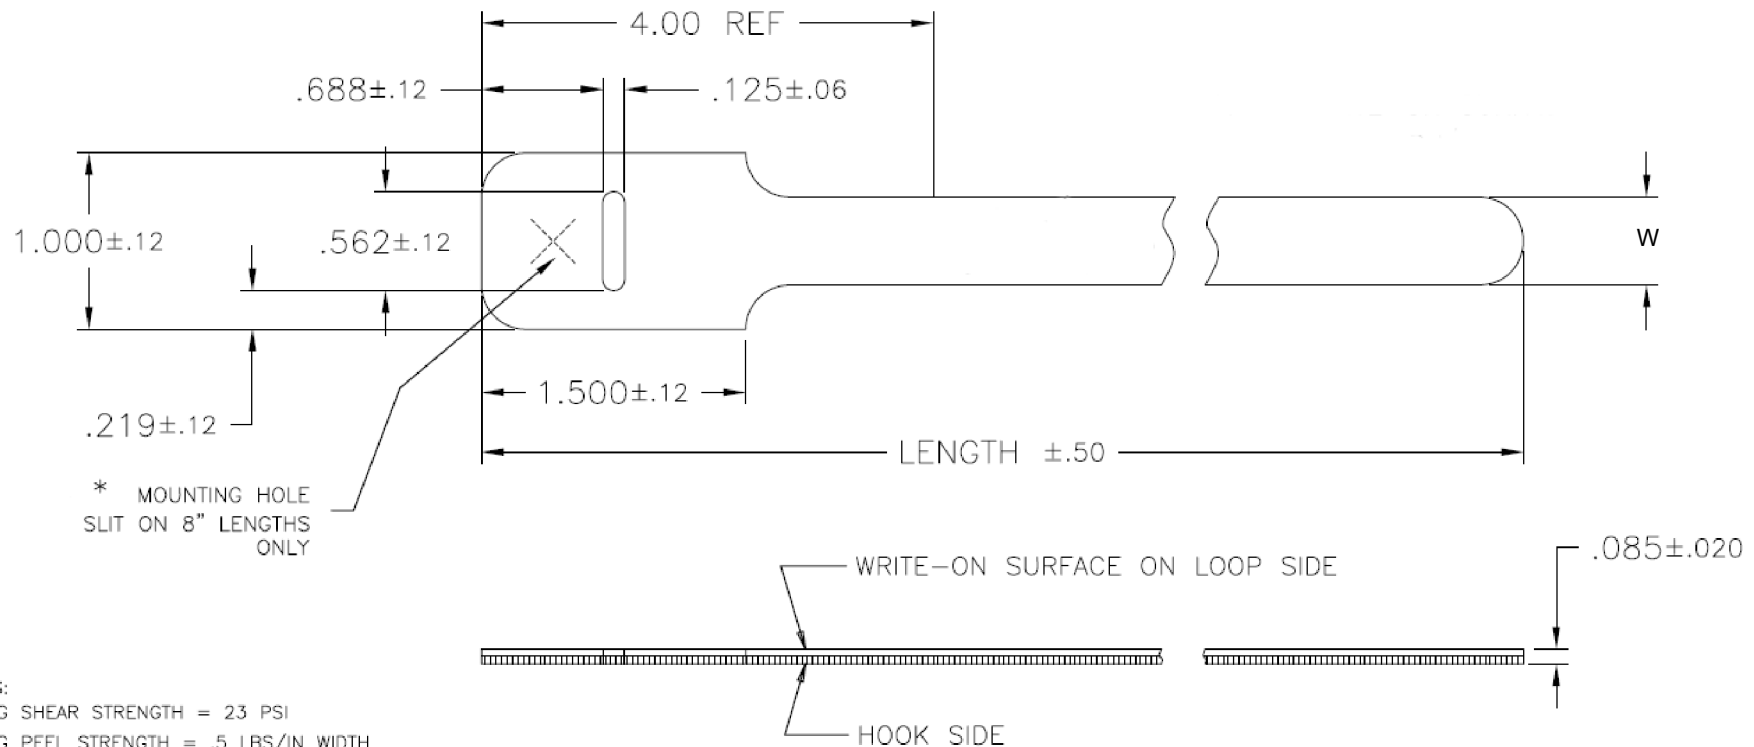

NOTES:

1. AVG SHEAR STRENGTH = 23 PSI
2. AVG PEEL STRENGTH = .5 LBS/IN WIDTH
3. TENSILE LOOP & MAX BUNDLE DIA ARE BASED ON 2" MIN HOOK & LOOP ENGAGEMENT

Products Included in Package	W	Color	Length
GT.50X63	.5 +/- .12	Orange	6"
GT.50X64	.5 +/- .12	Yellow	6"
GT.50X86	.5 +/- .12	Blue	8"
GT.50X80	.5 +/- .12	Black	8"
GT.50X115	.5 +/- .12	Green	11"
GT.75X152	.75 +/- .12	Red	15"

Material
PE, PA66

Units: **millimeters**Dimension without
tolerances details to:

.xxx = ±.013

.xx = ±.13

.x = ±.3

None = ±.8

∠ = ±0.5°

Dimension Formatted mm/[in]

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied, or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn GRW 5/28/2016
Approved KAC 5/28/2016
HellermannTyton
North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No 854-44448 / GTASST

Title **GRIP TIE ASSORTMENT**

Drawing-No PRODUCTION : Phase

16-0381-001-CSU

Scale 1:1

Project Number

PRP 16-0381

Format AH

Sheet 1/1