






CATIA V5



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.4	Design Release	-	SEE ECN# 311926	PP	3/18/25	EJH	3/18/25

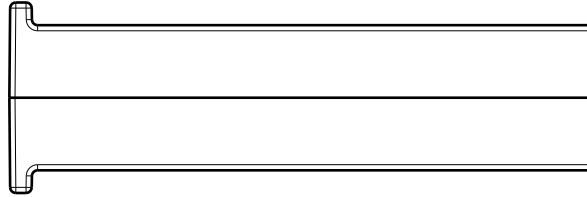

ISOMETRIC VIEW
(SCALE 1:1)

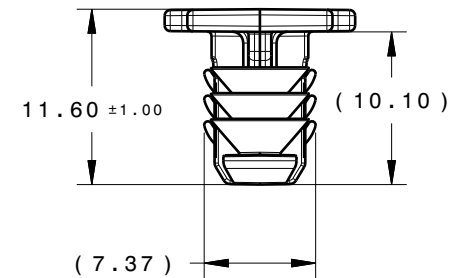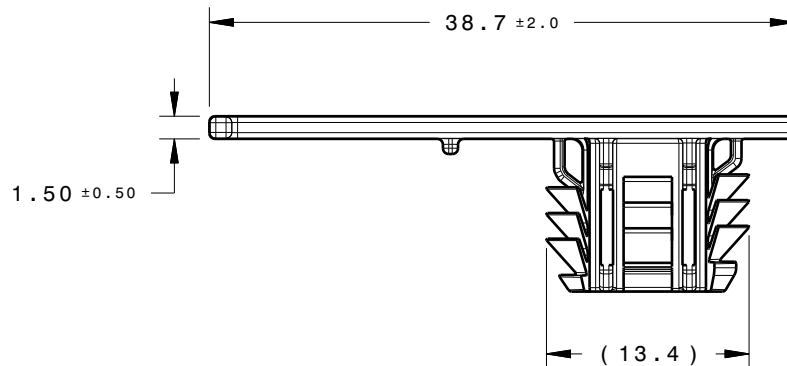

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.60mm - 2.5mm
4. APPLICABLE OVAL HOLE SIZES:

- A. 6.2 X 12.2mm
- B. 6.5 x 12.5mm
- C. 6.5 x 13.0mm
- D. 7.0 x 12.0mm



PART DESCRIPTION	MATERIAL	COLOR
BCSFTOVAL2-PA66HIRHS-NA	PA66HIRHS	NATURAL
BCSFTOVAL2-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK

Material PA66HIRHS COLOR: NATURAL	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	CJR	6/14/16	Article/Type-No BCSFTOVAL2	Scale 2:1	
	Tolerance defined on each dimension		Approved	SJA	6/14/16	Title TAPE CLIP WITH SHORT OVAL FIR TREE	Project Number 16-0407	
			<div>HellermannTyton</div> <div>North America Email: corp@htamericas.com Web: www.hellermann.tyton.com</div>			Drawing-No PRODUCTION : Phase	Format AH	
						<div>16-0407-011-CSU</div>		Sheet 1/1