




6 5 4 3 2 1

D



C

B

A

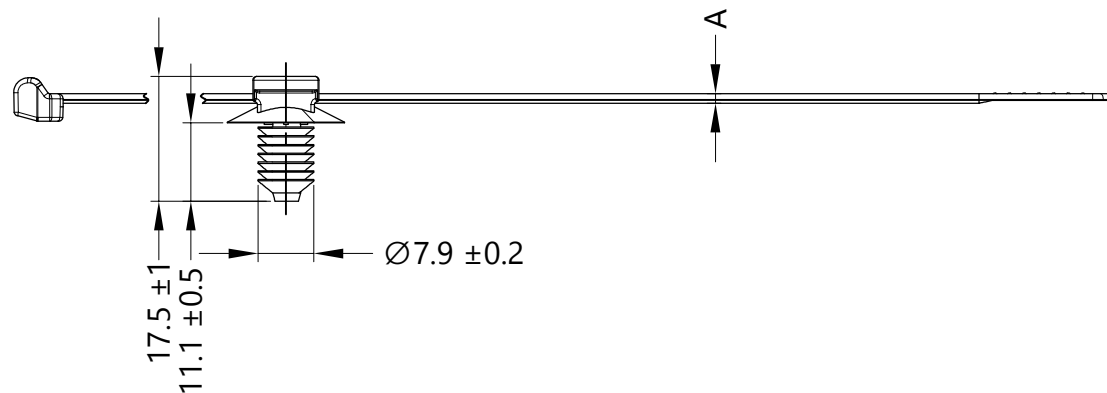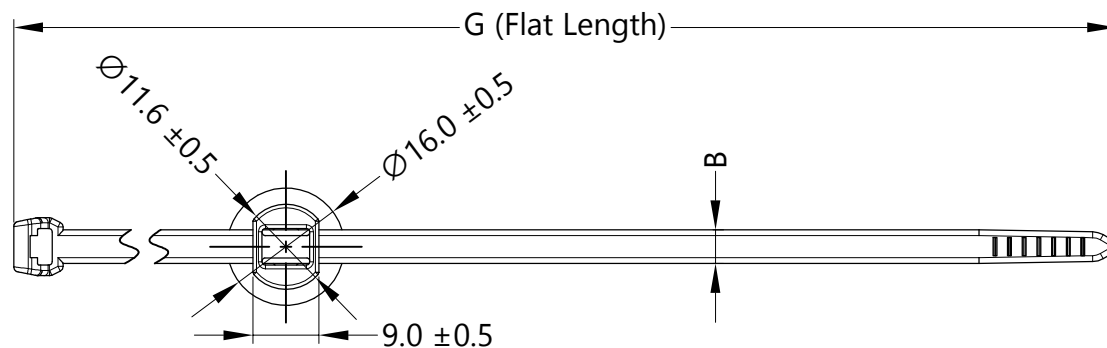

Delivery Condition



Reference:

1. Cable tie min loop tensile strength 225 newtons (50 lbf)

Notes:


Material: PA 66

Applicable hole size: Ø6.5 - Ø7.0mm

Steel metal thickness range: 0.75 - 6mm

A	B	G
1.3 ±0.2	4.6 ±0.2	200 ±5

Revision Level			Revision Record
Drawing	State	Part	ECN #SG07026-06 Added the delivery condition views.
00.0	Released	.	
Changed	Date (YYYY/MM/DD)		
Simon Ng	2022/12/08		
Approved	Date (YYYY/MM/DD)		
Edward Tan	2022/12/08		



All drawing
revisions are
stored in CAD
PDM database

The copyright of
this drawing is
reserved by
HellermannTyton.

Units
mm

HellermannTyton

www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Mandy Ong	2007/05/04
Approved	Date (YYYY/MM/DD)
Edward Tan	2007/05/04

Title

T50ROSFT6LG

Drawing-No

16-1254-001-CSH

Scale 1 : 1

Global Project Number
16-1254

Format A4

Sheet 1 / 1