



SW2014



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013497	GRW	7/12/2016	KAC	7/12/2016

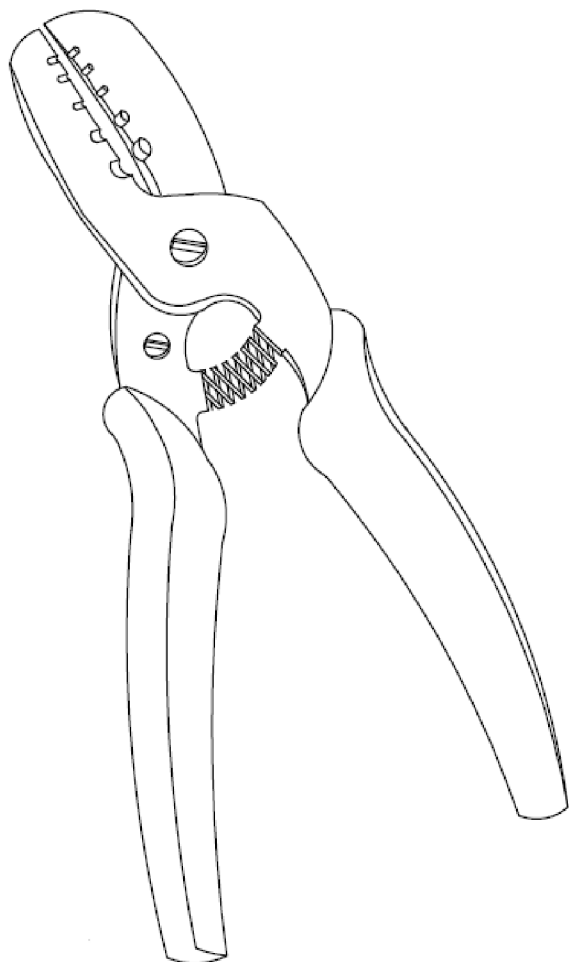

**NOTES: UNLESS OTHERWISE SPECIFIED.
SPECIFICATION & FUNCTION:**

- Five stripping functions in one convenient tool.
- Strips outer jackets from 2.0 - 2.4mm fiber, 2.8 - 3.0mm fiber and 2.0 - 3.0mm loose tube buffer tubes.
- Removes 900µm buffer from loose buffer without removing the acrylate coating.
- Strips buffer and acrylate from 900/125µm and 250/125µm
- Fiber factory set and calibrated cushioned locking handles provide an ergonomic grip and secured stripping application.
- A locking mechanism keeps the handles and blades safely closed when not in operation.

Material ASSEMBLED	Units: millimeters Dimension without tolerances details to: .xxx = ±.013 .xx = ±.13 .x = ±.3 None = ±.8 ∠ = ±0.5° Dimension Formatted mm/[in]	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	7/11/2016	Article/Type-No 855-19208 / HTFS	Scale 1:1
			Approved	KAC	7/11/2016	Title MULTI-FUNCTION FIBER OPTIC STRIPPER	Project Number PRP 16-1303
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No PRODUCTION : Phase	Format AH
						16-1303-001-CSU	Sheet 1/1