

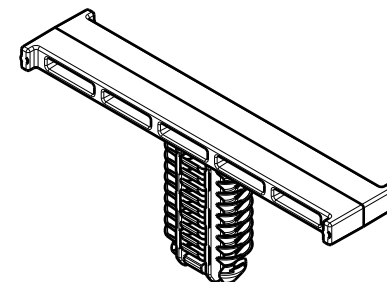
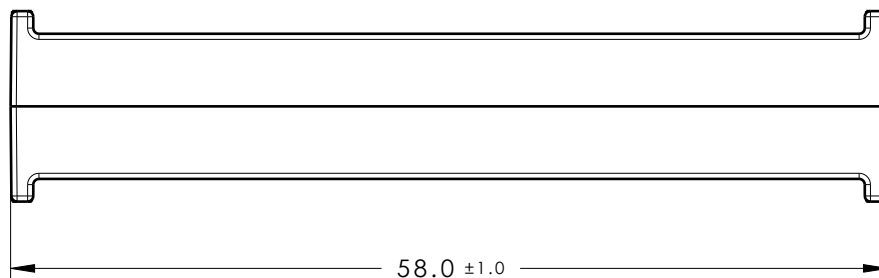
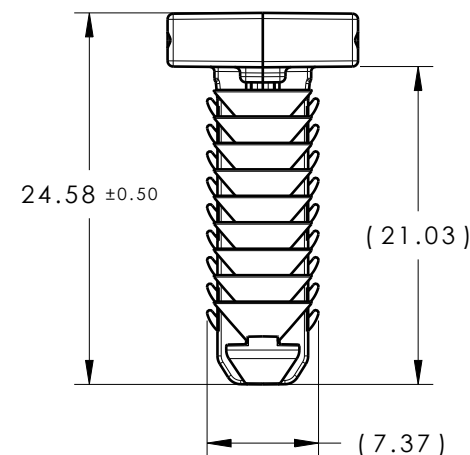


CATIA V5

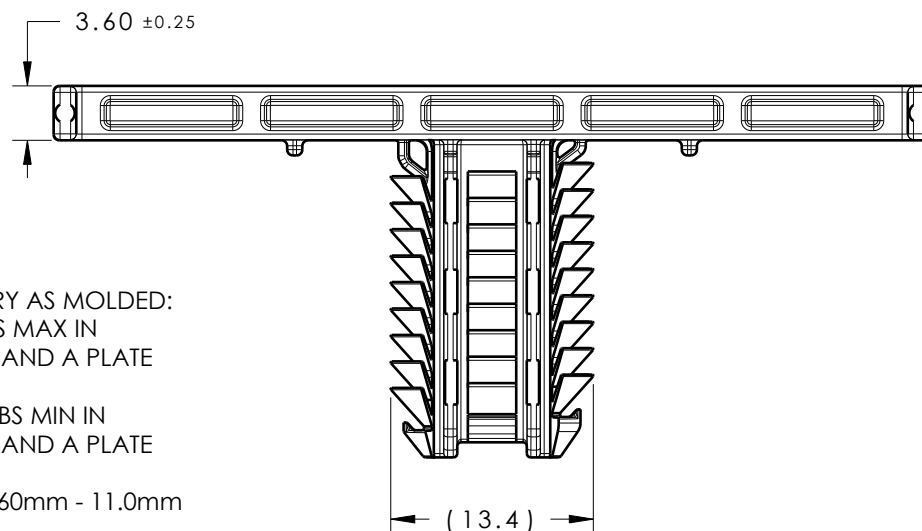

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.2	Design Release	-	SEE ECN# 311387	SAR	08/06/24	EJH	08/06/24

ISOMETRIC VIEW
SCALE 1:1

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN EACH APPLICABLE OVAL HOLE SIZE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.60mm - 11.0mm
4. APPLICABLE OVAL HOLE SIZES:
 - A. 6.2 X 12.2mm
 - B. 6.5 x 12.5mm
 - C. 6.5 x 13.0mm
 - D. 7.0 x 12.0mm
5. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
6. MAX ALLOWABLE FLASH OR MISMATCH TO BE: 0.5MM

02.2

Global Part Description	Material	Color
BCFTOVALXL-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK
BCFTOVALXL-PA66HIRHS-NA	PA66HIRHS	NATURAL

Material SEE CHART	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	EJH	9/1/16	Article/Type-No	BCFTOVALXL	Scale	2:1
	Tolerance defined on each dimension		Approved	CJR	9/29/16	Title	TAPE CLIP WITH 9 BRANCH OVAL FIR TREE	Project Number	
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
						16-1606-001-CSU		Sheet	1/1