

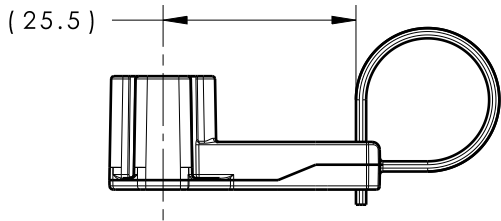
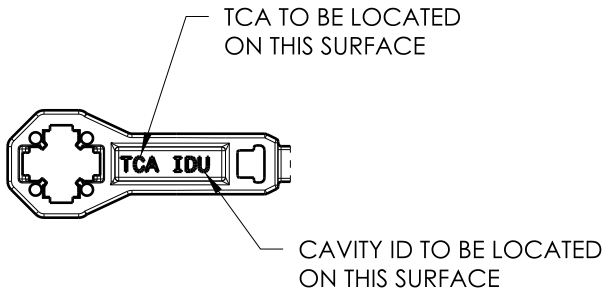

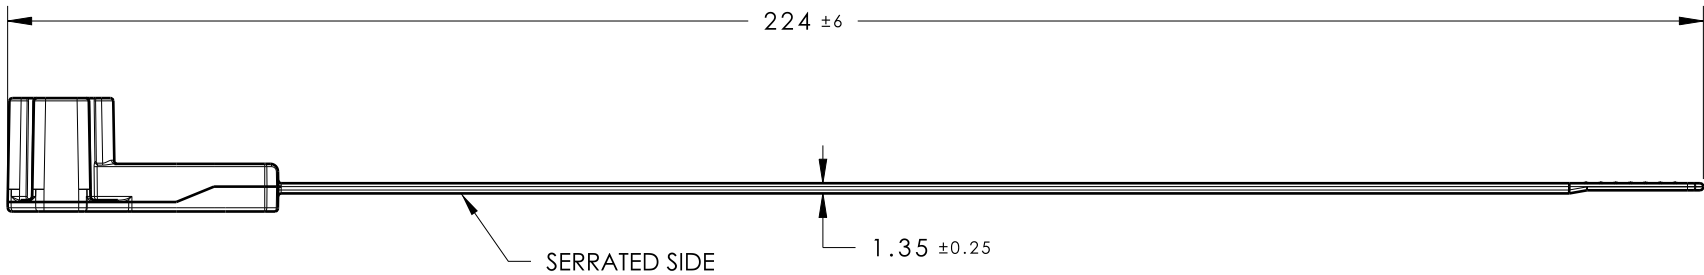


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release	-	SEE ECN# 015370	EJF	8/21/19	KVH	8/21/19

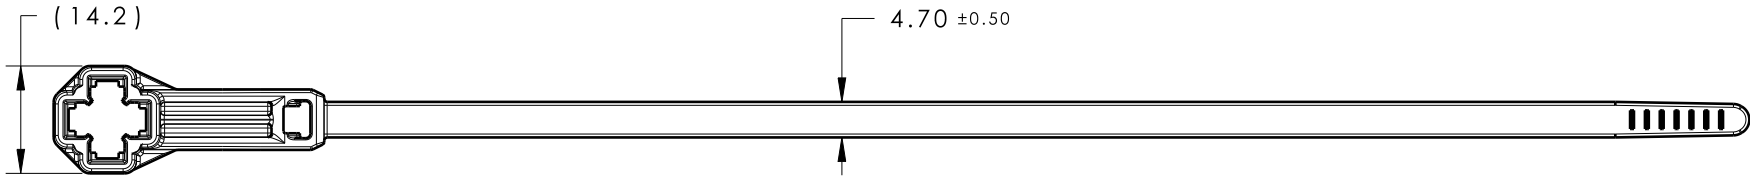

ASSEMBLED VIEW

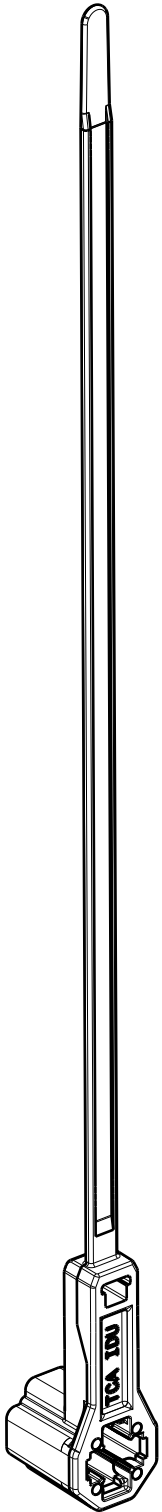

ISOMETRIC VIEW

- REFERENCE:
- PERFORMANCE REQUIREMENTS:
- 1. STUD MOUNT PUSH ON FORCE: 45 NEWTONS (10 LBS) MAX ON EACH APPLICABLE STUD SIZE
 - 2. STUD MOUNT PULL OFF FORCE: 223 NEWTONS (50 LBS) MIN ON EACH APPLICABLE STUD SIZE AT 2.5-4.0% MOISTURE
 - 3. APPLICABLE STUD SIZE:
 - A. M5 X 0.8
 - B. T5
 - C. M6 X 1
 - D. T6
 - 4. CABLE TIE MIN LOOP TENSILE STRENGTH: 223 NEWTONS (50 LBS)
 - 5. BUNDLE RANGE: 2.0mm TO 50.0mm
 - 6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 - 7. MAX ALLOWABLE FLASH TO BE: 0.5MM
 - 8. MAX ALLOWABLE MISMATCH TO BE: 0.1MM

GLOBAL PART DESCRIPTION			MATERIAL	COLOR					
T50ROSM6SMSO25-PA46-BN			PA46	BROWN					
Material SEE CHART COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	EJF	8/16/19	Article/Type-No T50ROSM6SMSO25		Scale 1:1
	Tolerance defined on each dimension			Approved	KVH	8/20/19	Title T50ROS CABLE TIE WITH M6 STUD MOUNT & 25mm OFFSET		Project Number 16-1636
				HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com					Format B
							Drawing-No		Production : Phase