


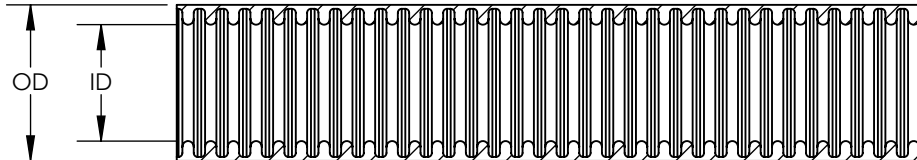
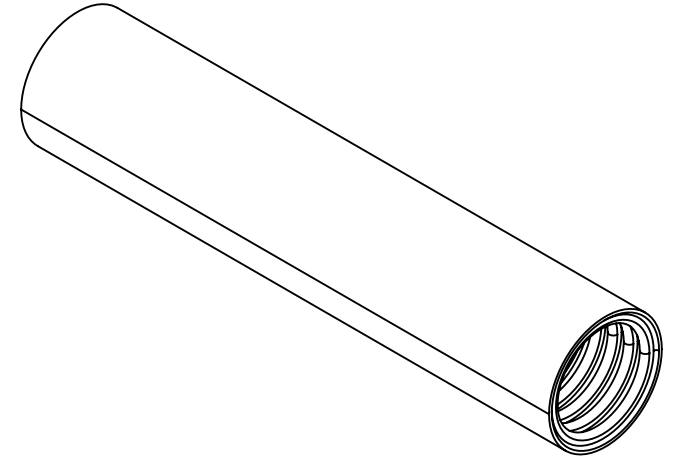


SW2014



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013638	GRW	11/30/2016	KAC	11/30/2016

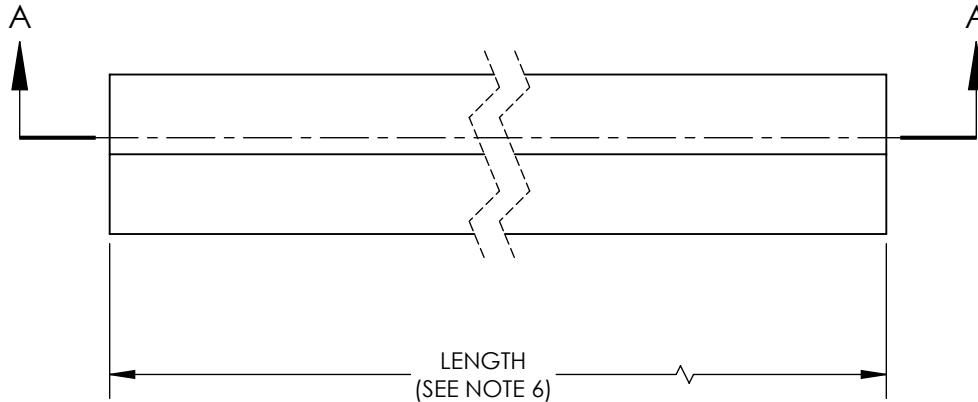

SECTION A-A

NOTES:

1. FLAMMABILITY SELF-EXTINGUISHING (EN613861)
2. OPERATING TEMPERATURE -4° F TO +221° F (-20° C TO +105° C)
3. RoHS
4. USE WITH HELAGUARD LTP OR LTPUL SERIES METALLIC FITTINGS
FOR IP66 + IP67 + IP68 + IP69 RATINGS
5. MANUFACTURED TO UL360 REQUIREMENTS
6. CONSULT FACTORY OR WEBSITE FOR AVAILABLE LENGTHS

Conduit Nominal Size		HellermannTyton Item Number	Man'f Part Reference	Outside Dimension (OD)		Inside Dimension (ID)		Minimum Bend Radius	
inches	mm			in	mm	in	mm	in	mm
1/2	20.0	LTBRDP20B-25M	LTBRDP20B	0.83	21.1	0.63	16.0	2.56	65.0
3/4	25.0	LTBRDP25B-25M	LTBRDP25B	1.04	26.4	0.83	21.0	3.94	100.0
1	32.0	LTBRDP32B-25M	LTBRDP32B	1.30	33.1	1.04	26.5	4.72	120.0
1-1/4	40.0	LTBRDP40B-10M	LTBRDP40B	1.65	41.8	1.39	35.4	5.51	140.0
1-1/2	50.0	LTBRDP50B-10M	LTBRDP50B	1.89	47.9	1.59	40.4	7.09	180.0
2	63.0	LTBRDP63B-10M	LTBRDP63B	2.35	59.7	2.03	51.6	10.63	270.0

Material GALVANIZED STEEL & PVC	Units: inches Dimension without tolerances details to: .xxxx = ±.0005 .xxx = ±.005 .xx = ±.01 .x = ±.03 None = ±.06 ∠ = ±0.5° Dimension Formatted in [mm]	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	11/30/2016	Article/Type-No LTBRDP SERIES	Scale	
			Approved	KAC	11/30/2016		Project Number	
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Title HELAGUARD FLEXIBLE METALLIC CONDUIT, OVERBRAIDED CENTER AND PVC COVER	Format AH	
							Sheet 1/1	

 Drawing-No
16-1965-001-CSU

PRODUCTION : Phase