

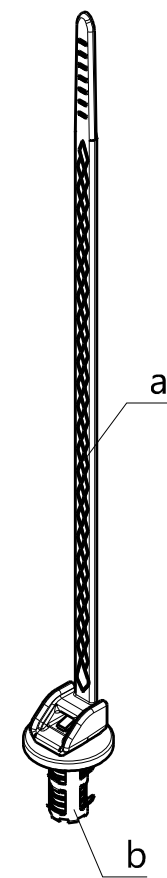
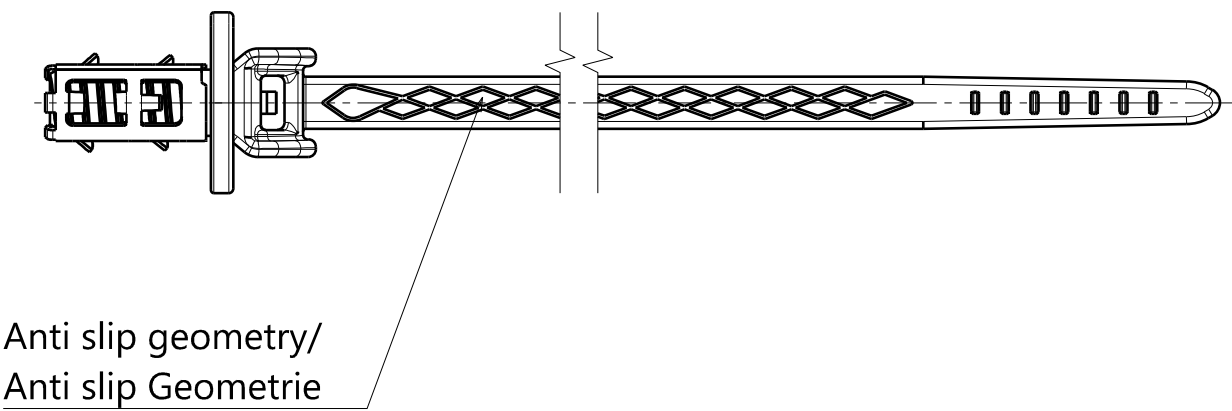
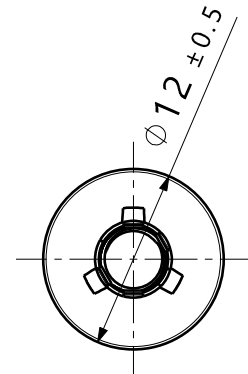


1:1

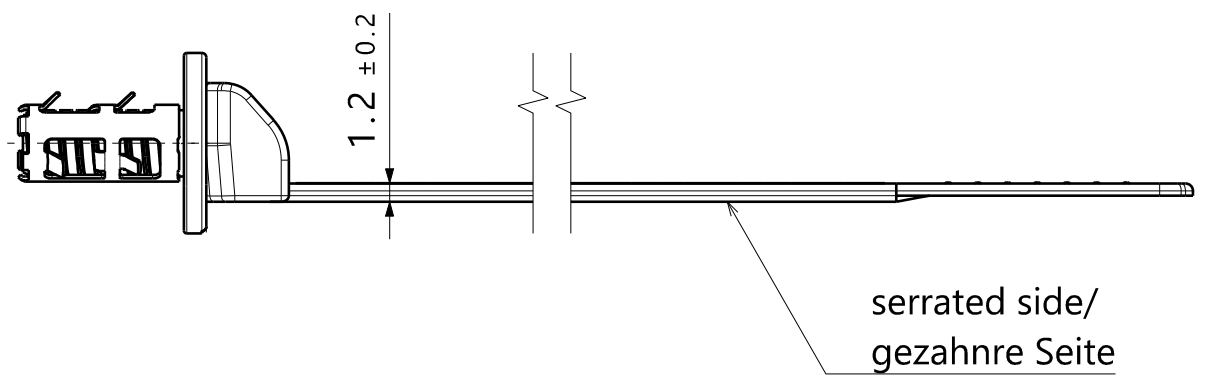

b: Clamp 21-0448-001-SFC/
b: Klammer 21-0448-001-SFC

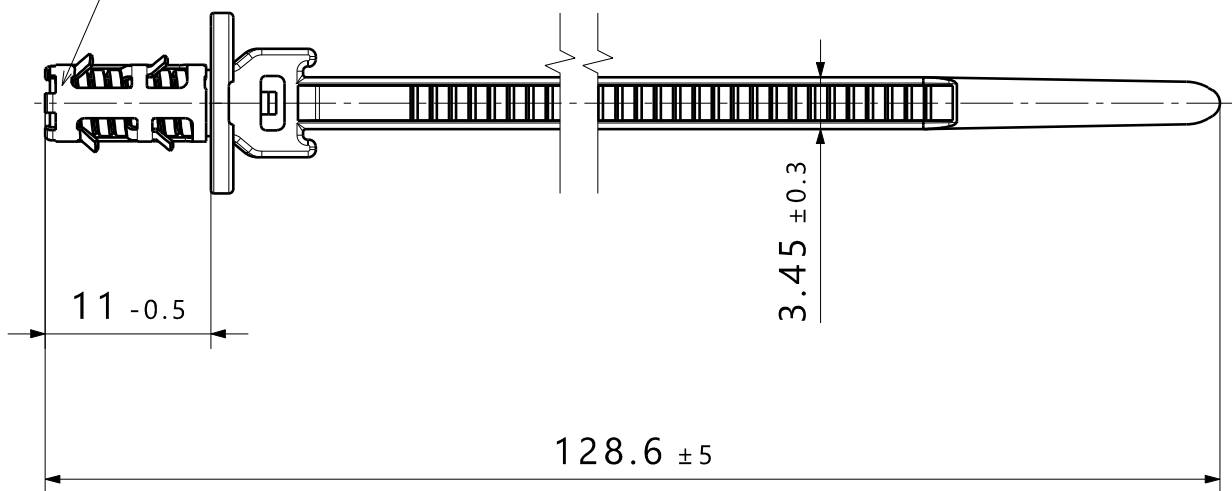

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	a: PA6.6 heatstabilized	- Material:	a: PA6.6 hitzestabilisiert
- Material color:	a: black	- Material Farbe:	a: schwarz
- Bundle Ø:	1 - 25mm	- Buendel Ø:	1 - 25mm
- Tensile force:	200N	- Schlaufenhaltekraft:	200N
- Blind hole Ø:	5,9 - 6,1mm	- Sackloch Ø:	5,9 - 6,1mm
- Hole depth:	min. 11mm	- Loch Tiefe:	min. 11mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)	Title		Scale						
Drawing	State	Part	All drawing revisions are stored in CAD PDM database			HellermannTyton.		A.Hiller		2022/02/23		T30S0SASDHA6x11E		2:1					
00.0	Design Release	-						Approved		Date (YYYY/MM/DD)				B.Schiwek		2022/02/23		Global Project Number	
Changed	Date (YYYY/MM/DD)																	17-0174	
-	-	-					Units		HellermannTyton www.HellermannTyton.com		Drawing-No 17-0174-002-CSG		Format						
Approved	Date (YYYY/MM/DD)				mm		A2												
-	-	-									Sheet		1 / 1						