
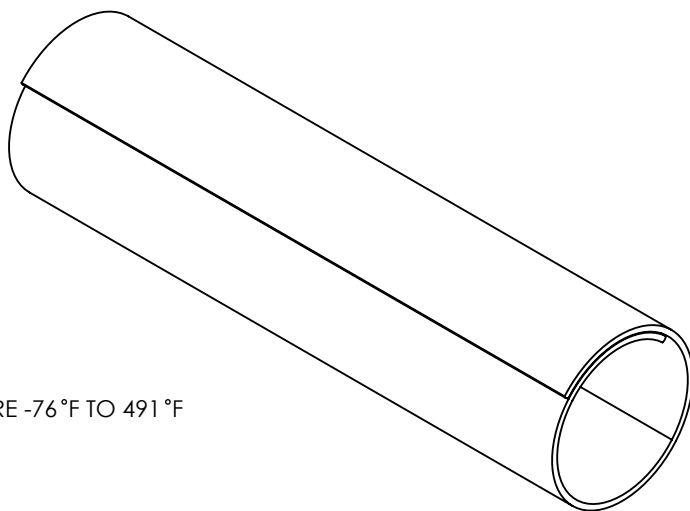


Technical drawing of a stepped shaft. The drawing shows a shaft with a central section of length L that tapers by 5% on both sides. The taper is indicated by dashed lines and a dimension line labeled $L +0\% / -5\%$.

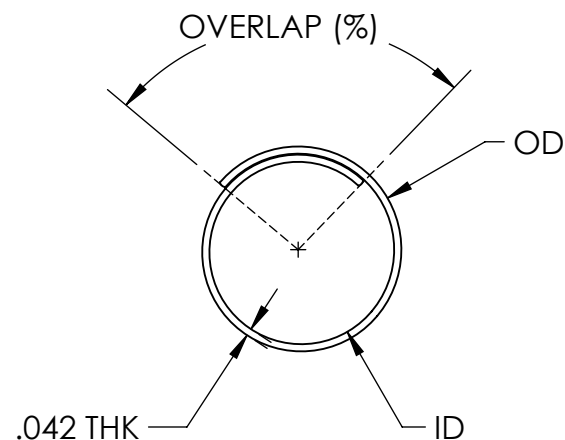

1. OPERATING TEMPERATURE -76°F TO 491°F
(-60°C TO 255°C)
2. MELT 2,048°F (1,120°C)
3. NON-FLAMMABLE
4. RoHS
5. HF
6. FAR 25 COMPLIANCE

NOMINAL SIZE	TYPE	OD	ID	OVERLAP (%)	LENGTH (FT)	PIECES PER BOX
1/4	BSHTTSW14SB	.292	.250	41	4	50
3/8	BSHTTSW38SB	.417	.375	41	4	30
1/2	BSHTTSW12SB	.542	.50	35	4	25
1/2	BSHTTSW12LB	.542	.50	35	4	70
5/8	BSHTTSW58SB	.667	.625	30	4	20
3/4	BSHTTSW34SB	.792	.750	28	4	15
3/4	BSHTTSW34LB	.792	.750	28	4	50
1	BSHTTSW1SB	1.042	1.0	26	4	9
1	BSHTTSW1LB	1.042	1.0	26	4	30
1 1/4	BSHTTSW114SB	1.292	1.25	26	4	6
1 1/2	BSHTTSW112SB	1.542	1.50	23	4	4
1 1/2	BSHTTSW112LB	1.542	1.50	23	4	15
2	BSHTTSW2SB	2.042	2.0	23	4	2

Material GF-AL	Units: inches	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	1/26/2017	Article/Type-No	BSHTTSW		Scale
	Dimension without tolerances details to: .xxxx = ± .0005 .xxx = ± .005 .xx = ± .01 .x = ± .03 None = ± .06 ∠ = ±0.5° Dimension Formatted in/[mm]		Approved	KAC	1/26/2017	Title	ALUMINUM LAMINATED FIBERGLASS WRAP		Project Number
			 North America Email: corp@htamericas.com Web: www.hellermann.tyton.com	Drawing-No	Production : Phase		Format	AH	
				17-0420-001-CSU		Sheet	1/1		