

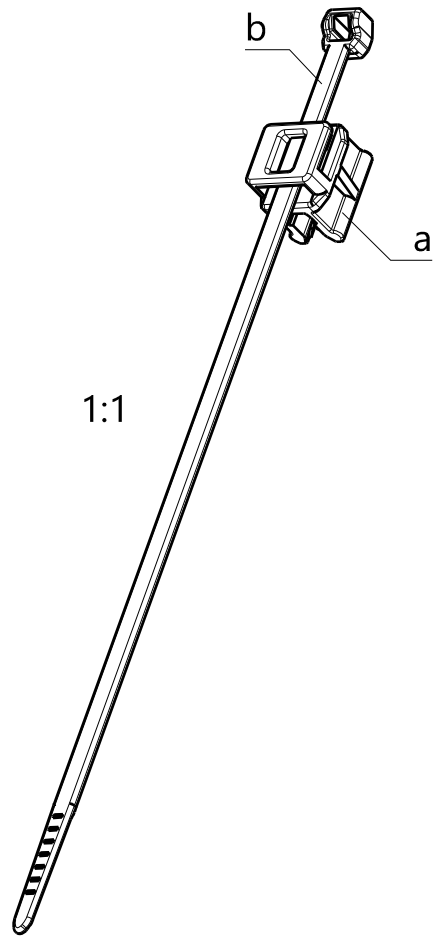


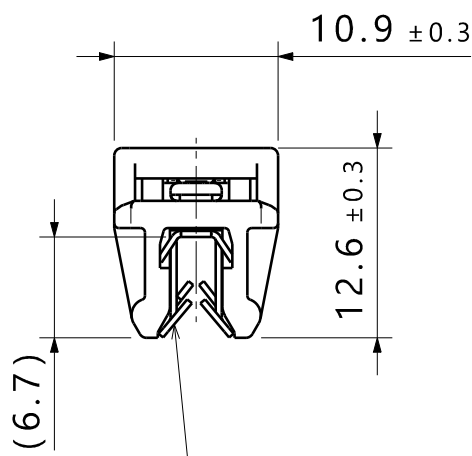

Cable tie left or right installed/
Kabelbinder von links oder rechts eingefuehrt

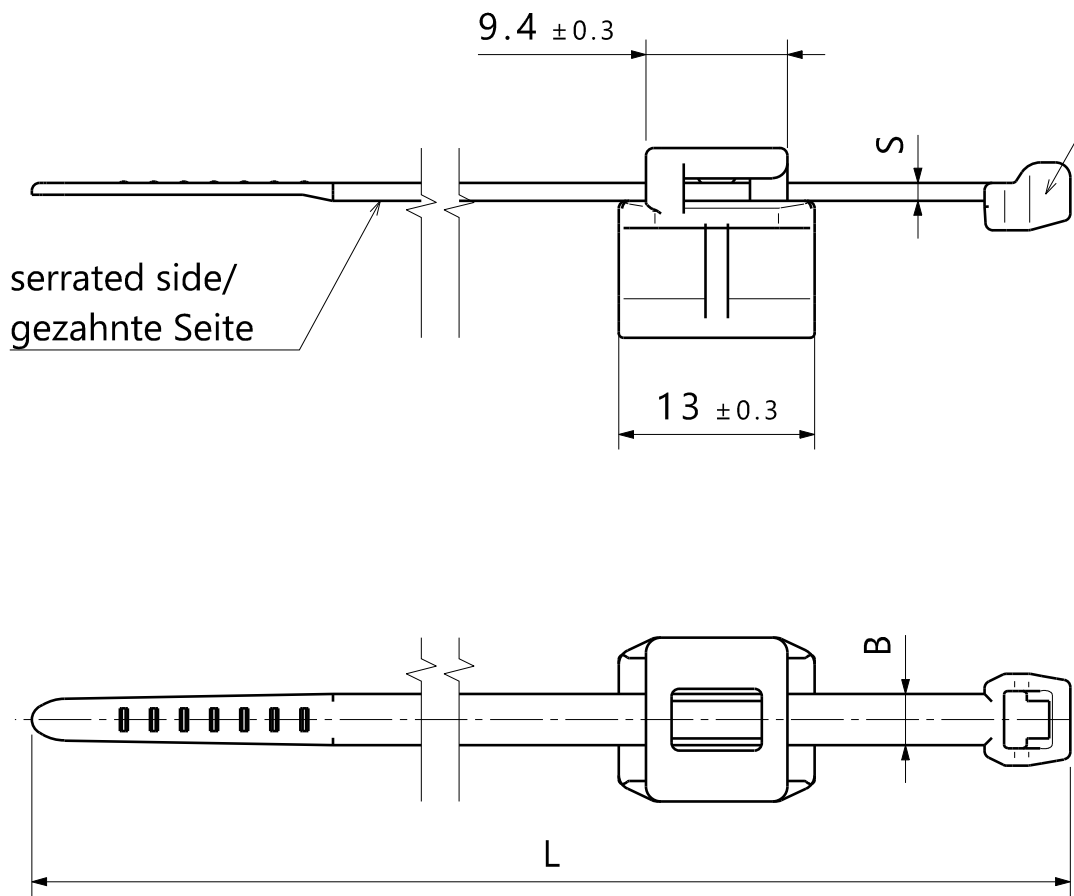

Metal clamp 15-0124-004-CSG
fit to material thickness 0.5-2.5/
Blechklammer 15-0124-004-CSG
passend fuer Materialstaerke 0.5-2.5

Specification:
- Performance requirements at
equilibrium condition
standard atmosphere 23 °C / 50% RH

- Material: a: PA6.6
b: PA6.6

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Spezifikation:
- Leistungsanforderung im
Gleichgewichtszustand
Normalklima 23 °C / 50% RH

- Material: a: PA6.6
b: PA6.6

Durch das Herstellverfahren bedingte
Geometriaenderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben
dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø max.	Tensile force/ Schlaufenhaltekraft N min.			
1	T30ROSEC0.5-2.5TPVB	GPN 17-0582	145 ±5	3.4 ±0.2	1.2 ±0.2	30	133	X	X	

Semi-finished part/ Halbfabrikat	Project no./ Projektnr.	
	a	b
EC0.5-2.5	GPN 09-0443	NT 822-99
T30ROS		

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title		Scale				
Drawing	State	Part					A.Hiller	2020/03/19			1:1				
00.2	Design Release	00					Approved	Date (YYYY/MM/DD)	...EC0.5-2.5TPVB		Global Project Number				
Changed	Date (YYYY/MM/DD)						U. Villbrandt	2020/03/19			see table				
-	-				All drawing revisions are stored in CAD PDM database				Drawing-No 17-0582-001-CSG		Format				
Approved	Date (YYYY/MM/DD)										A2				
-	-										Sheet				
											1 / 1				