
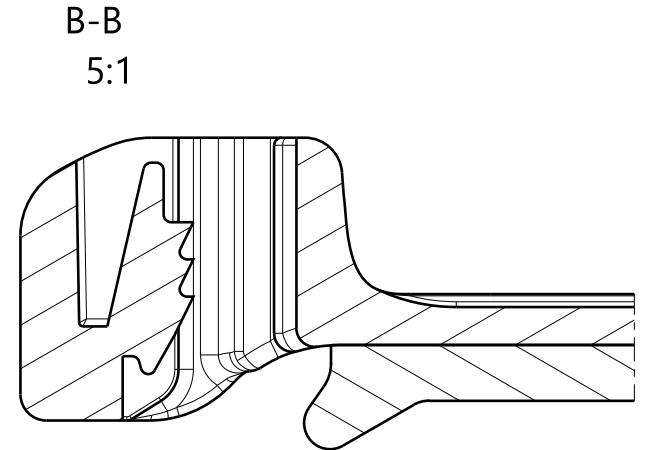

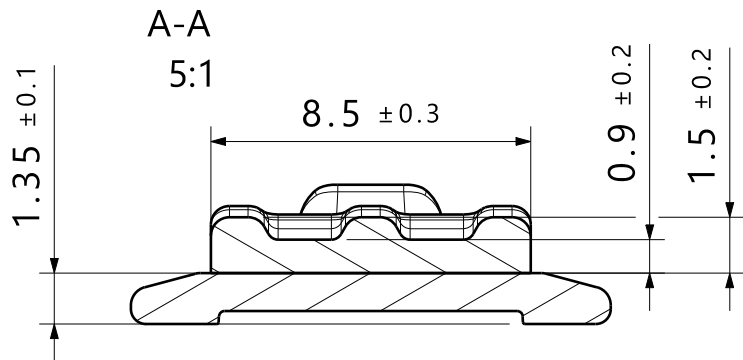
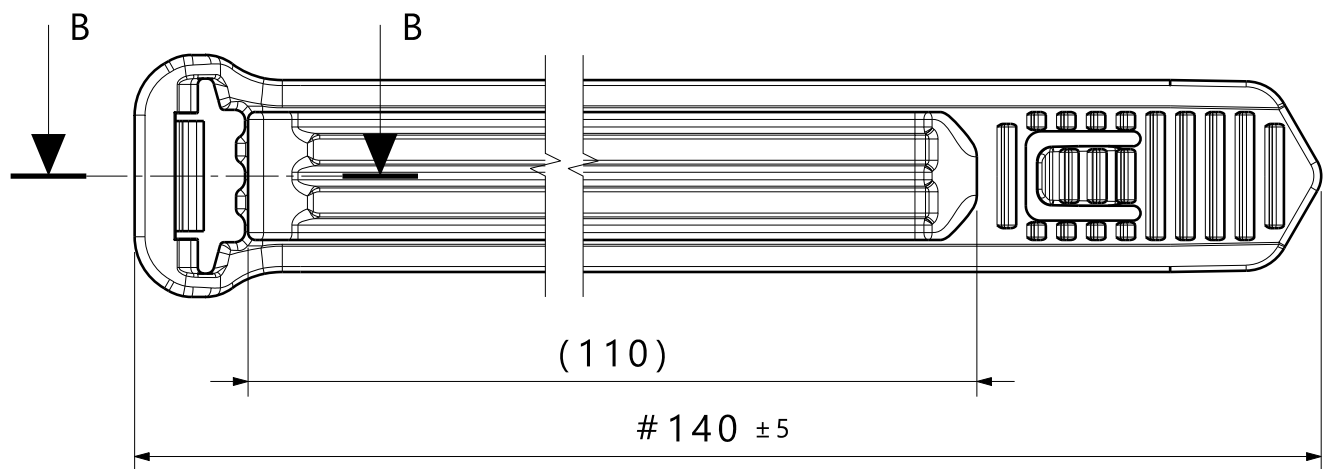
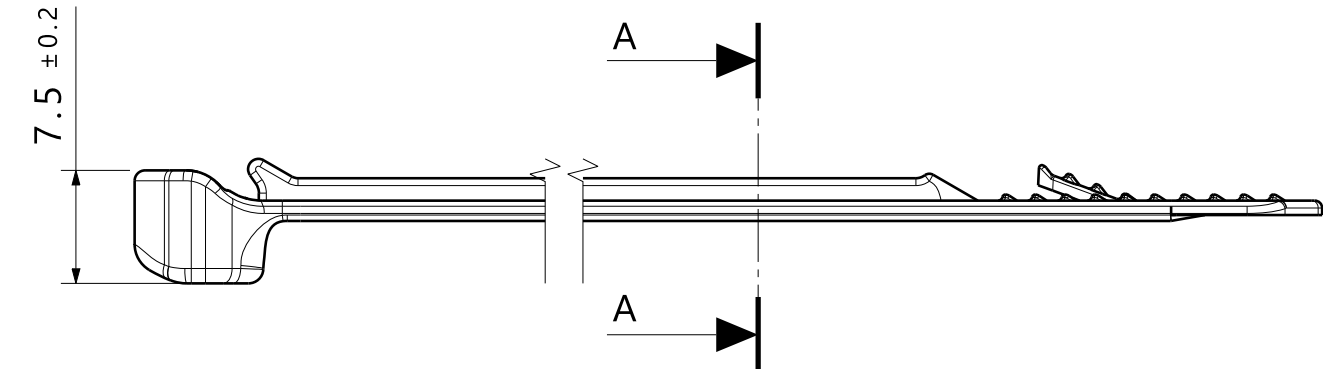


a: Hard component
b: Soft component

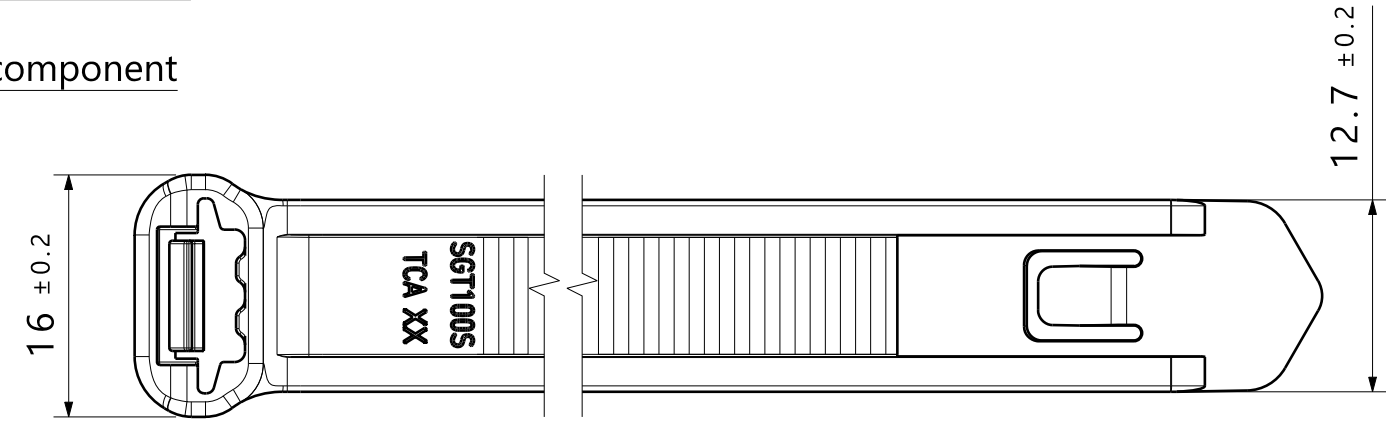

Specification:
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

Spezifikation:
- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

Material/ Material a	Material/ Material b	Tensile force/ Schlaufenhaltekraft N min.	Max. recommended tension setting/ max. empfohlene Abbindekraft N
PA66HS	TPE	445	200±20
PA66HIRHSUV		315	169±20

- Bundle Ø: 5.0-25.4mm

- Buendel Ø: 5.0-25.4mm

- # Measured in orientated condition: Delivery condition may differ from straigh to curved appearance depending on material combination

- # Im ausgerichteten Zustand gemessen: Auslieferungszustand kann in Abhängigkeit der Materialkombination gerade oder gekrümmt auftreten

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Revision Level		
Drawing	State	Part
00.11	Design Release	
Changed	Date (YYYY/MM/DD)	
Approved	Date (YYYY/MM/DD)	

Revision Record	

All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Drawn	Date (YYYY/MM/DD)
Matz	2022/01/06
Approved	Date (YYYY/MM/DD)
Schiwek	2022/01/06

Title	SGT100S
Drawing-No	
17-0651-003-CSG	