
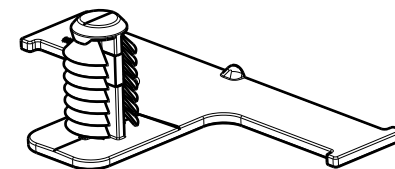


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
05.1	Design Release	-	SEE ECN# 311590	KAJ	10/24/24	RLV	10/29/24

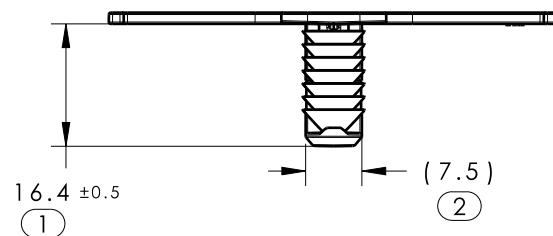


ISOMETRIC VIEW
SCALE 1:1

PERFORMANCE REQUIREMENTS:

- FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN THE APPLICABLE HOLE SIZE AND PLATE THICKNESS:
 - 8.0mm HOLE, PLATE THICKNESS 1.8mm
 - M10x1.5 THREADED HOLE, PLATE THICKNESS 4.5mm
- FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN THE APPLICABLE HOLE SIZE AND PLATE THICKNESS:
 - 8.0mm HOLE, PLATE THICKNESS 1.8mm
 - M10x1.5 THREADED HOLE, PLATE THICKNESS 4.5mm
- SHEET METAL THICKNESS RANGE: 0.60mm - 5.75mm
- APPLICABLE HOLE SIZE:
 - 8.0mm +/- 0.4
 - M10x1.5 THREADED HOLE

PRODUCTION NOTES:

- MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
- MAX ALLOWABLE FLASH TO BE: 0.25mm
- MAX ALLOWABLE MISMATCH TO BE: 0.1mm

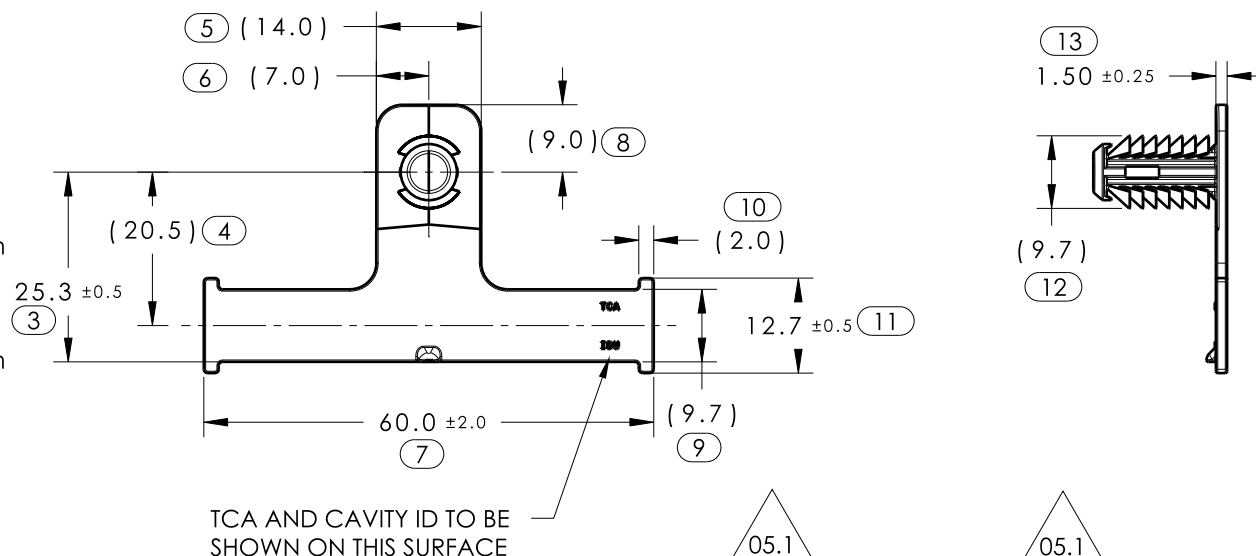

TCA AND CAVITY ID TO BE SHOWN ON THIS SURFACE

PART DESCRIPTION	MATERIAL	COLOR
SOBC25FT8-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK

Material COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	NHK	01/04/18	Article/Type-No	SOBC25FT8	Scale	1:1
	Tolerance defined on each dimension	Approved		EJH	01/04/18	Title	25mm OFFSET TAPE CLIP WITH 8mm FIR TREE	Project Number	17-1028	
		HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH		
					17-1028-001-CSU			Sheet	1/1	

COLOR: SEE CHART

Tolerance defined on each dimension