
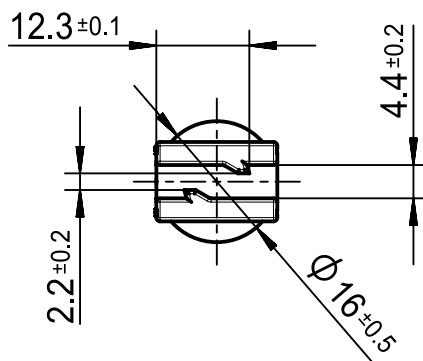
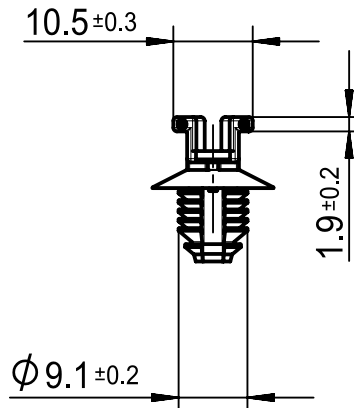
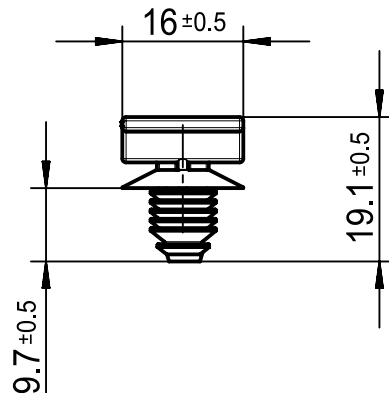


1:1



Printed copy for information only/
Ausdruck nur zur Information

- Material: PA6.6+PA6
heatstabilized
impact modified

- Material: PA6.6+PA6 hitzestabilisiert
schlagzaeh modifiziert

- Hole size/ - Loch Ø: 8.0 - 8.5mm wlv./ alternative M10
- Panel thickness/ - Blechdicke: 1.5 - 4.0mm

The manufacturing-related geometry changes (injection point, ejector marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieabweichungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)				
Drawing	State	Part	All drawing revisions are stored in CAD PDM database			Wohlrab		2021/06/23		Title		Scale 1:1		
00.1	Design Release	-				Approved		Date (YYYY/MM/DD)				Global Project Number		
Changed		Date (YYYY/MM/DD)				Hofer		2021/06/23		CCPAEFT8G		17-1645		
Approved		Date (YYYY/MM/DD)		Units mm		HellermannTyton				Drawing-No		Format A4		
						www.HellermannTyton.com				17-1645-001-CSG		Sheet 1 / 1		