
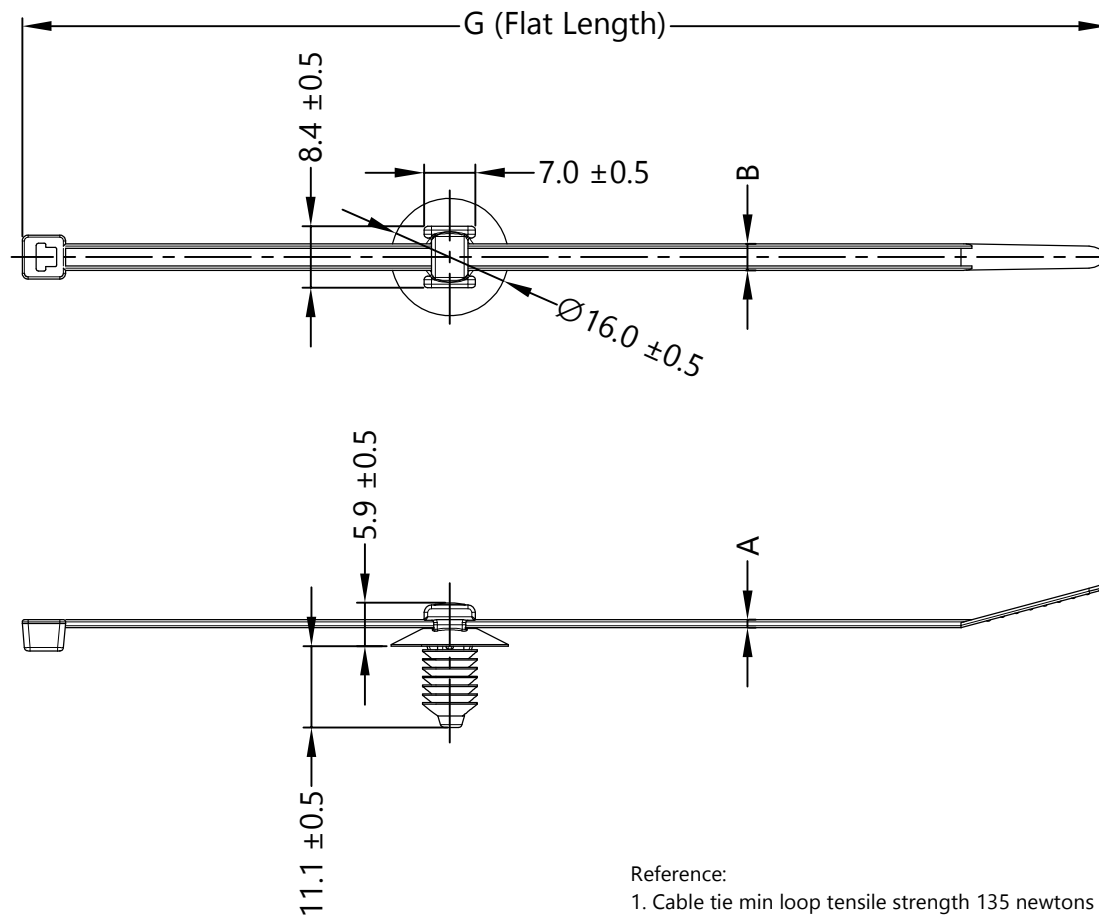


Delivery condition

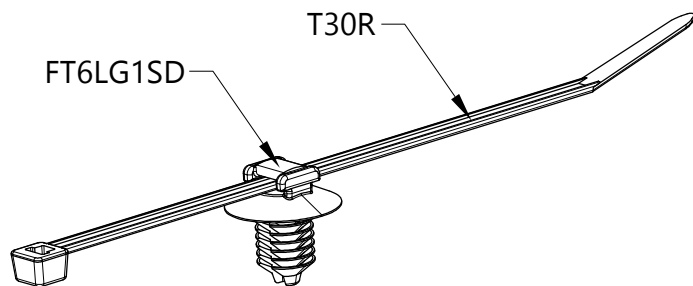

Reference:

1. Cable tie min loop tensile strength 135 newtons (30 lbf)

Notes:

Material: PA 66


Bundle range: Ø1.5 to Ø30mm

Steel metal thickness range: 0.6 to 6mm

Applicable hole size: Ø6.5 to Ø7mm

| A         | B         | G       |
|-----------|-----------|---------|
| 1.1 ± 0.2 | 3.5 ± 0.2 | 150 ± 5 |

| Revision Level |                   |      | Revision Record                                    |
|----------------|-------------------|------|----------------------------------------------------|
| Drawing        | State             | Part | ECN #SG13052-02<br>Change to GS2 drawing template. |
| 00.0           | Released          | .    |                                                    |
| Changed        | Date (YYYY/MM/DD) |      |                                                    |
| Simon Ng       | 2022/06/22        |      |                                                    |
| Approved       | Date (YYYY/MM/DD) |      |                                                    |
| Edward Tan     | 2022/06/22        |      |                                                    |



All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units  
mm

**HellermannTyton**

www.HellermannTyton.com

|            |                   |
|------------|-------------------|
| Drawn      | Date (YYYY/MM/DD) |
| Simon Ng   | 2013/12/05        |
| Approved   | Date (YYYY/MM/DD) |
| Edward Tan | 2013/12/05        |

Title

T30RFT6LG1SD

Drawing-No

**17-1756-001-CSH**

Scale 1 : 1

Global Project Number  
17-1756

Format A4

Sheet 1 / 1