
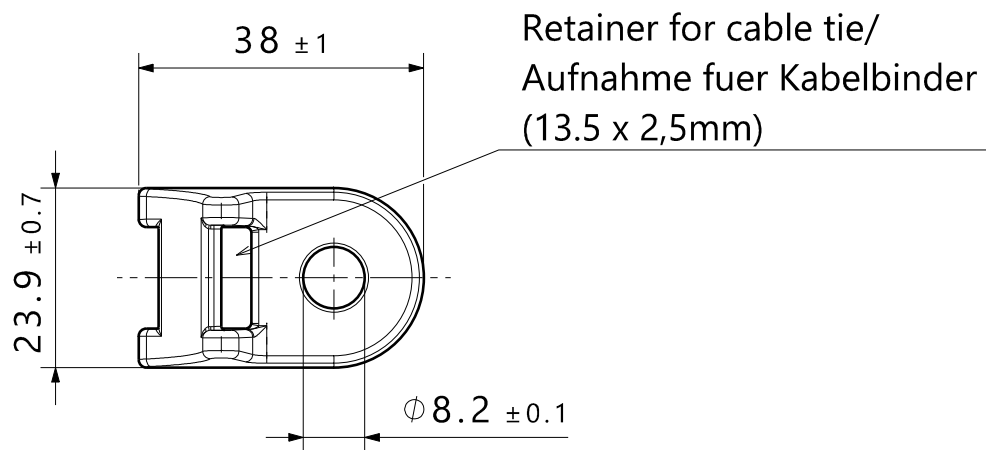
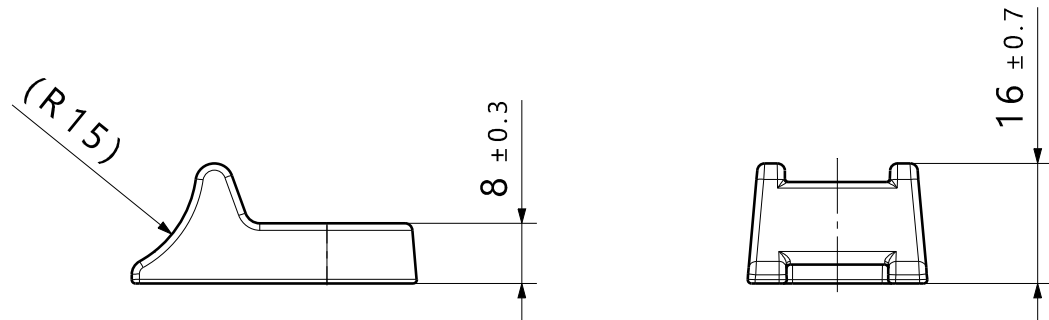




Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Material: PA6GF30
- Material color: black
- Welded screw Ø: M8
- Recommended tightening torque: max. 8Nm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Spezifikation:

- Material: PA6GF30
- Material Farbe: schwarz
- Schweissbolzen Ø: M8
- Empfohlenes Anzugsdrehmoment: max. 8Nm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database		The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title				Scale		
Drawing	State								Part	A.Hiller		2023/01/27							
00.3	Design Release								-	Approved		Date (YYYY/MM/DD)							
Changed		Date (YYYY/MM/DD)							M.Andersson		2023/01/27		CTMM8				Global Project Number		
-		-							GPN 17-2345				Drawing-No				Format		
Approved		Date (YYYY/MM/DD)		Units				HellermannTyton				17-2345-001-CSG				A3			
-		-		mm												www.HellermannTyton.com		Sheet	
-		-										1 / 1							