
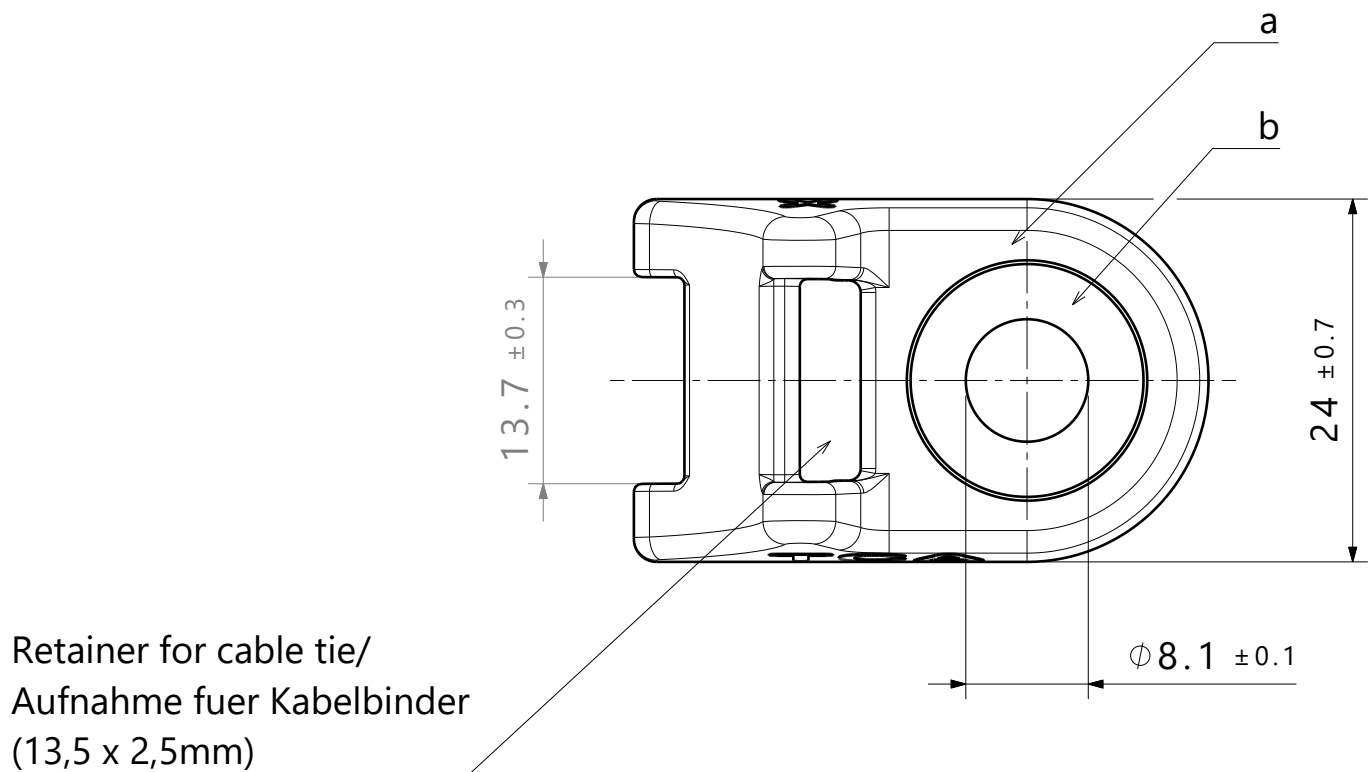
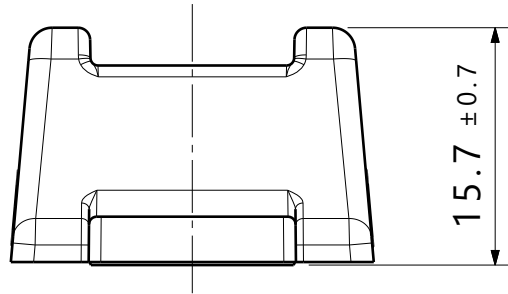
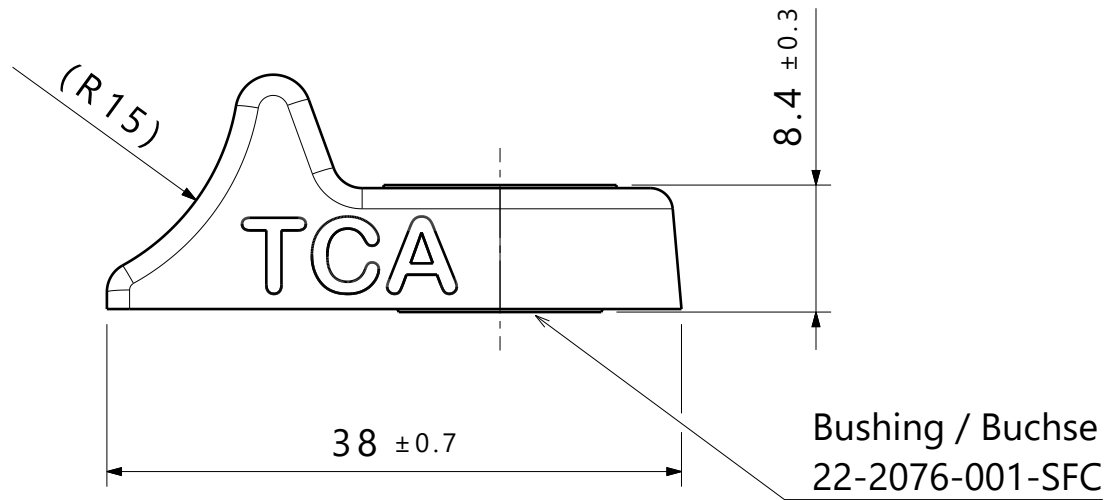




Printed copy for information only/
Ausdruck nur zur Information

- Material:

a. PA6.6 HIRHS
b. steel with anti-corosion surface protection
- Material color:

a. black
b. grey
- Recommended tightening torque:

25 Nm
- for threaded bolt:

M8
- Material:

a. PA6.6 HIRHS
b. Stahl mit Oberflaechenkorrosionsschutz
- Material Farbe:

a. schwarz
b. grau
- empfohlenes Anzugsdrehmoment:

25 Nm
- fuer Gewindebolzen:

M8

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzen, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record					The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)	Title			Scale	
Drawing	State	Part	All drawing revisions are stored in CAD PDM database		Units mm			Manuel Andersson		Approved		Date (YYYY/MM/DD)				Global Project Number	
00.3	Design Release						Bjoern Schiwek		2025/03/27		17-2348						
Changed	Date (YYYY/MM/DD)						Drawing-No		17-2348-001-CSG		Format		A2				
Approved	Date (YYYY/MM/DD)		Sheet		1 / 1												