

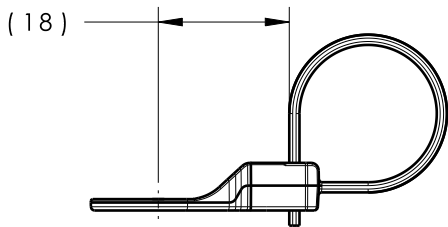
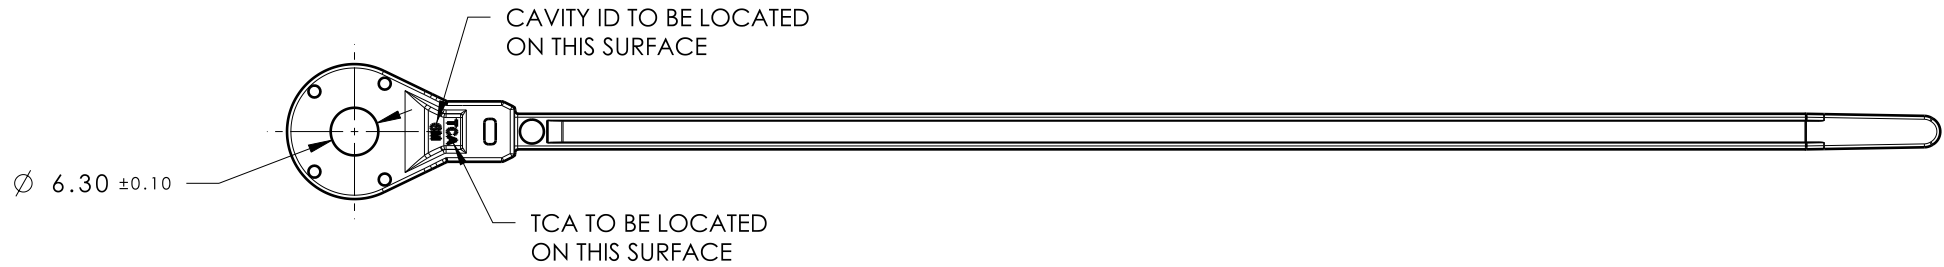
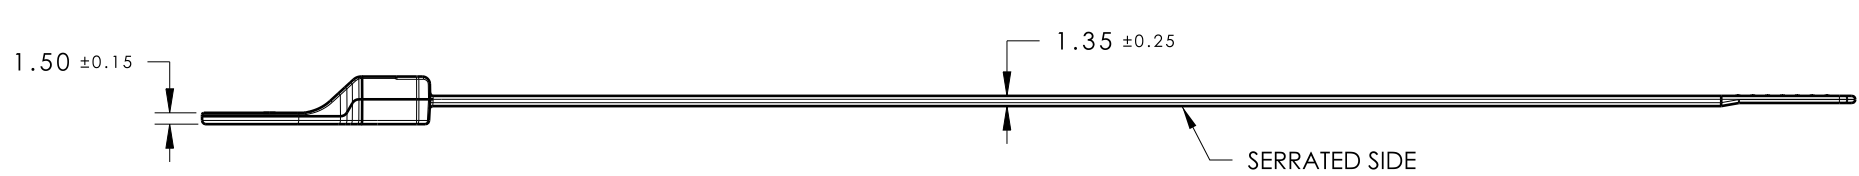


Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
01.1	Design Release	-	SEE ECN# 015368	KVH	08/19/19	EJF	08/19/19

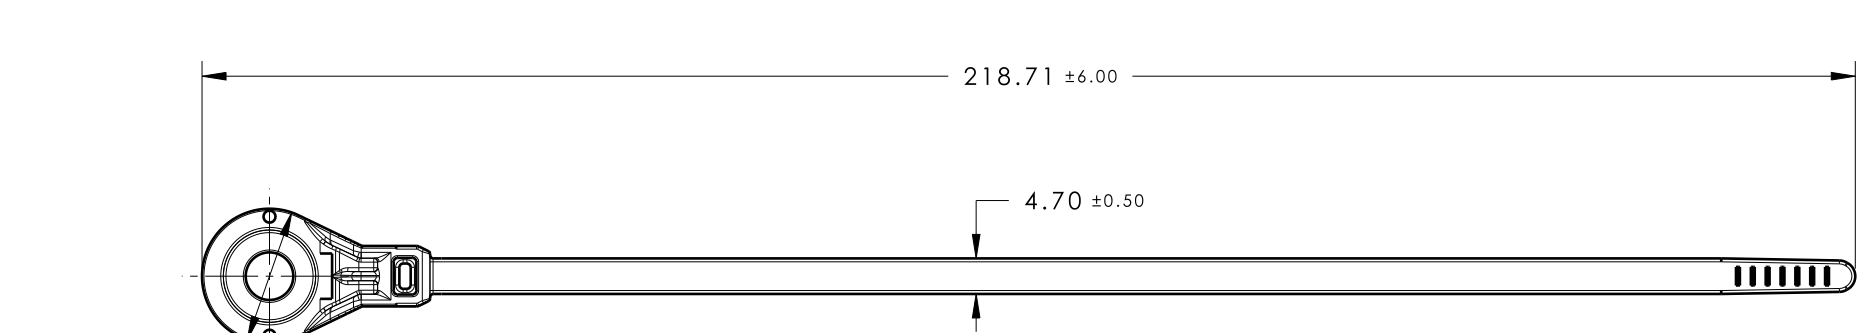

ASSEMBLED VIEW

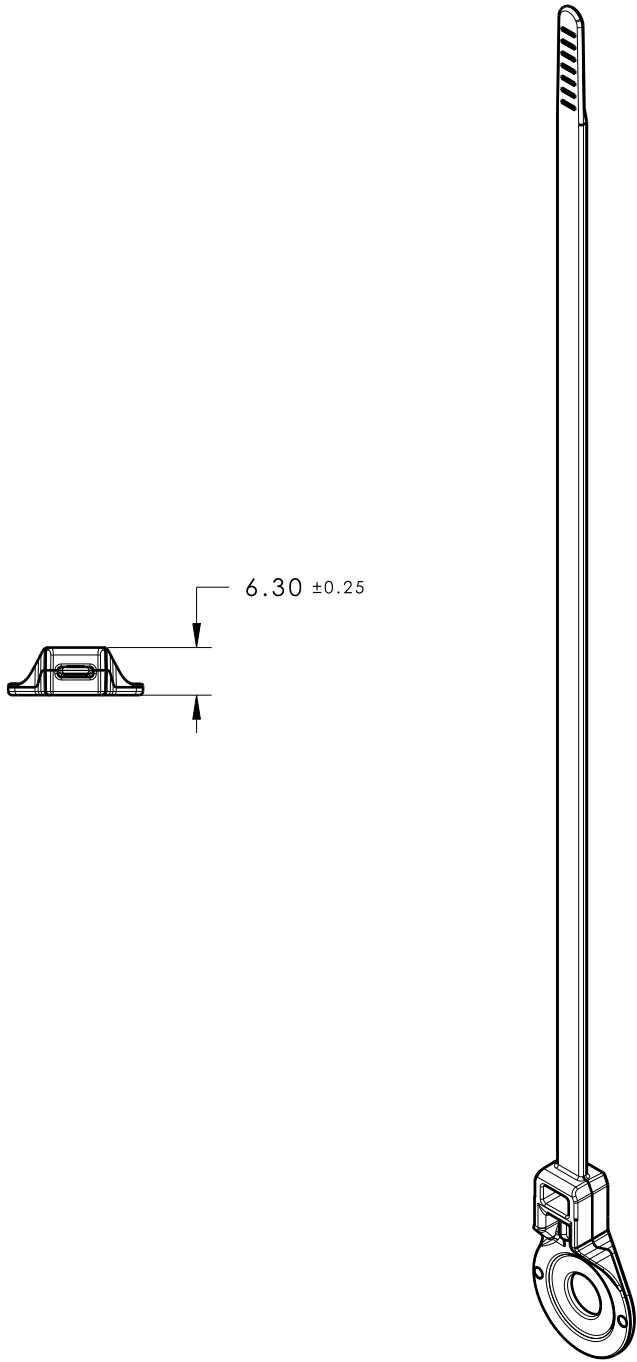

ISOMETRIC VIEW

REFERENCE:
PERFORMANCE REQUIREMENTS:
1. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
2. BUNDLE RANGE: 2.0mm TO 50.0mm
3. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
4. MAX ALLOWABLE FLASH TO BE: 0.25mm
5. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

Material SEE CHART COLOR: SEE CHART	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	KVH	3/13/18	Article/Type-No	T50ROSBHMBTIE		Scale	1:1
	Tolerance defined on each dimension		Approved	EJF	4/5/18	Title	T50ROS CABLE TIE WITH 18.0mm OFFSET AND 6.30mm HOLE		Project Number	18-0371
			HellermannTyton							
			North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase		Format	B
			18-0371-011-CSU					Sheet	1/1	