
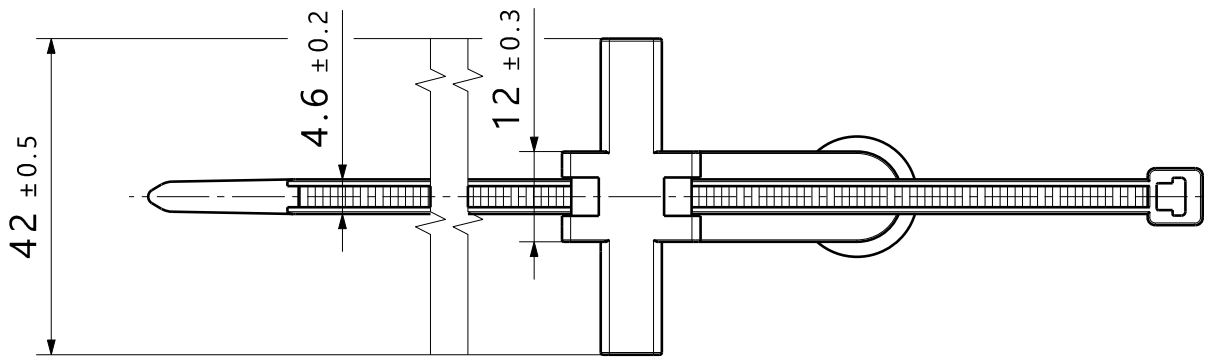
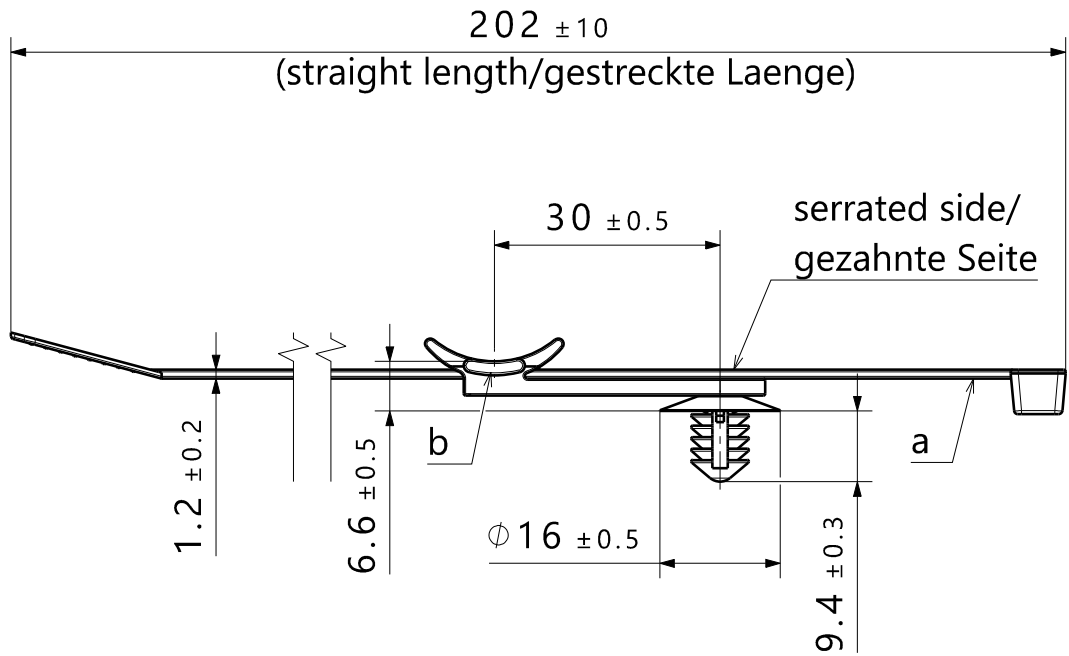


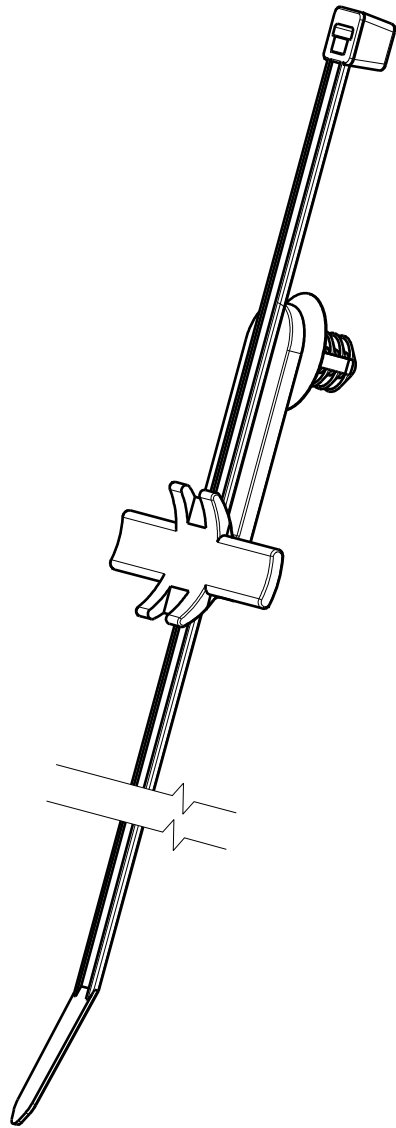


- Specification:
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 heatstabilized b: PA6.6 heatstabilized
 - Bundle Ø/ - Tensile force/
 - Hole size/ - Panel thickness/
- Spezifikation:
- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 hitzestabilisiert b: PA6.6 hitzestabilisiert
 - Buendel Ø: max. 45 mm
 - Schlaufenhaltekraft: 225 N
 - Loch Ø: 6.3 - 7 mm
 - Blechdicke: 0.8 - 4.5 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Semi-finished part/ Halbfabrikat	Project no./ Projektnr.	
	a	b
T50R	GPN 12-0123	GPN 18-0233
COW30DP7		
Product type/ Artikelbezeichnung		Project no./ Projektnr.
T50RCOW30DP7		GPN 18-0885
		X X

Revision Level			Revision Record					The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title		Scale									
Drawing	State	Part							A.Hiller	2020/03/30			1:1									
00.1	Design Release	0							Approved	Date (YYYY/MM/DD)			Global Project Number									
Changed	Date (YYYY/MM/DD)								S.Blanks	2020/04/24			18-0885									
Approved	Date (YYYY/MM/DD)							All drawing revisions are stored in CAD PDM database	Units	mm			Drawing-No									
													Format									
									www.HellermannTyton.com		18-0885-001-CSG		Sheet									
											1 / 1											