

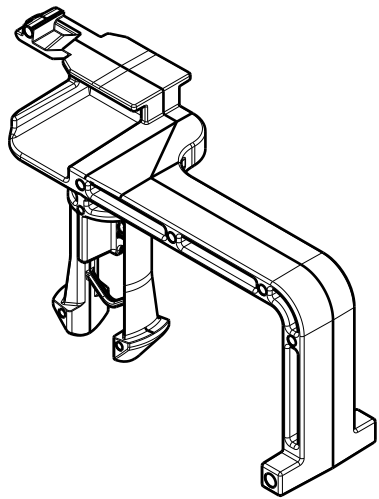
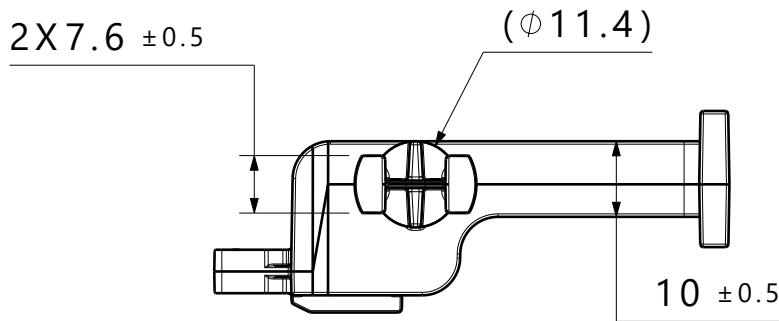


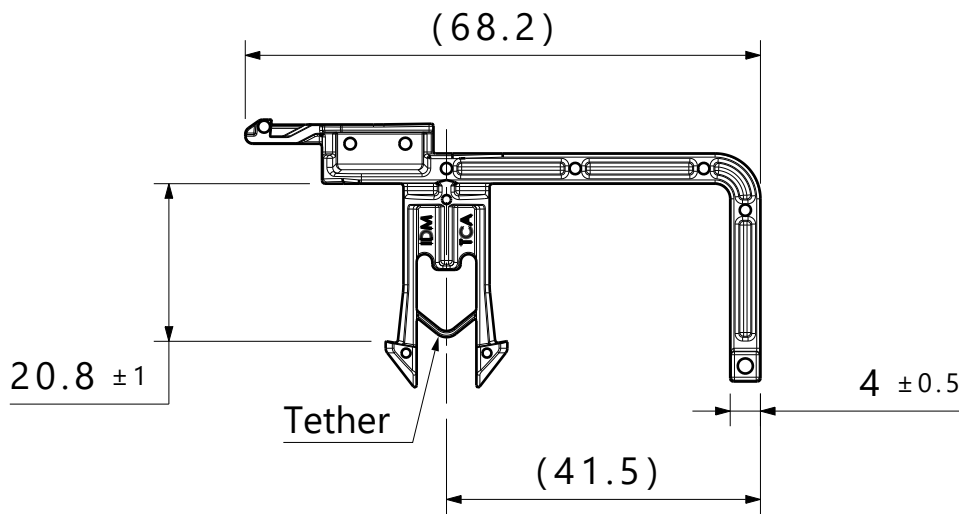


Isometric View

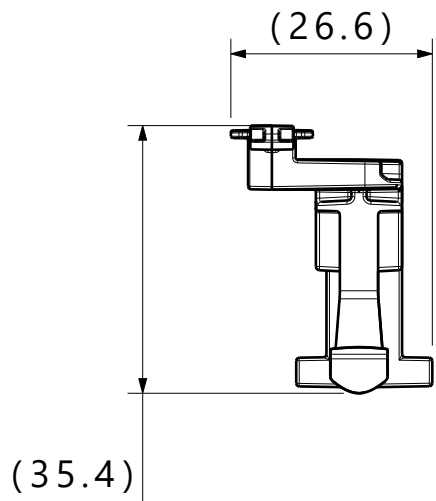

- REFERENCE:
- PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
- 1. MOUNT PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN EACH APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 14.25mm.
 - 2. MOUNT PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN EACH APPLICABLE NOMINAL HOLE SIZE AND A PLATE THICKNESS OF 14.25mm.
 - 3. SHEET METAL THICKNESS RANGE: 13.5mm - 15.0mm
 - 4. APPLICABLE HOLE SIZE:
 - A. 12.35 +/- 0.65
 - 5. DESIGNED TO MEET PUSH ON/PULL OFF FORCES OF SAE/USCAR-2
 - 6. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-11 (NOT A TEST SPEC.)
 - 7. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 - 8. MAX ALLOWABLE FLASH TO BE: 0.25mm
 - 9. MAX ALLOWABLE MISMATCH TO BE: 0.10mm
 - 10. IF THE TETHER IS FRACTURED THE PART WILL STILL FUNCTION AS INTENDED.

Revision Level		
Drawing	State	Part
00.0	Design Release	A
Changed	Date (YYYY/MM/DD)	
Karabon	2020/01/21	
Approved	Date (YYYY/MM/DD)	
Camposagrado	2020/01/21	

Revision Record	
ECN 015661	



All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units
mm

HellermannTyton
www.HellermannTyton.com

GLOBAL PART DESCRIPTION		MATERIAL	COLOR
TRANSMNT90DEG11CC-PA46-BN		PA46	BROWN
Drawn	Date (YYYY/MM/DD)	Title High heat transmission tape bar	
Karabon	2020/01/21		
Approved	Date (YYYY/MM/DD)		
Camposagrado	2020/01/21	Drawing-No 18-1188-011-CSU	
HellermannTyton www.HellermannTyton.com			
		Scale	1:1
		Global Project Number 18-1188	
		Format	A3
		Sheet	1 / 1