





CATIA V5

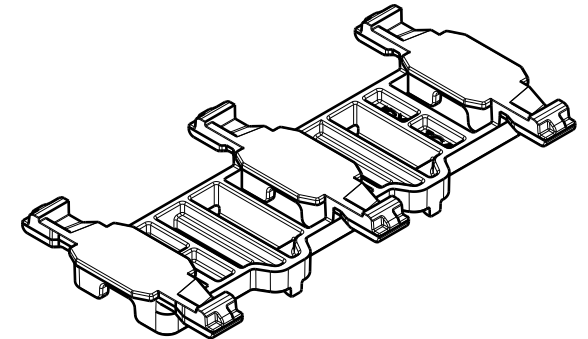

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
03.1	Design Release	-	SEE ECN# 017245	NHK	10/26/2022	EJF	10/26/2022

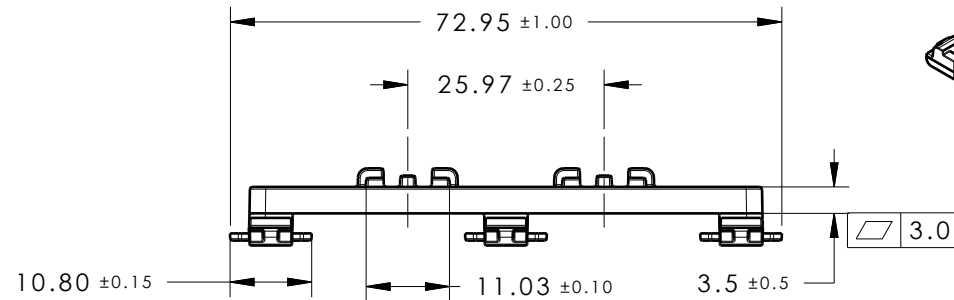

ISOMETRIC VIEW

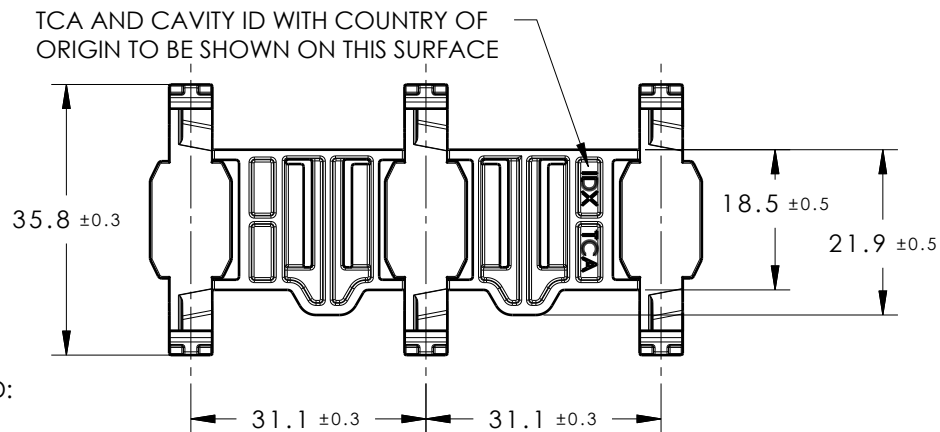

- REFERENCE:
PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. DESIGNED TO MEET PUSH ON/PULL OFF FORCES OF SAE/USCAR-2
 2. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-11 (NOT A TEST SPEC.)
 3. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 4. MAX ALLOWABLE FLASH TO BE: 0.5mm
 5. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

03.1

GLOBAL PART DESCRIPTION	MATERIAL	COLOR
TRIPLE11CCBRKT-PA66HIRHSUV-BK	PA66HIRHSUV	BLACK

Material COLOR: SEE CHART	Units	millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	NHK	07/24/18	Article/Type-No	TRIPLE11CCBRKT	Scale	1:1
	Tolerance defined on each dimension			Approved	EJF	07/24/18	Title	TRIPLE 11mmCC INLINE BRACKET WITH 11mmCC SLOT	Project Number	18-1949
				HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
							18-1949-001-CSU		Sheet	1/1