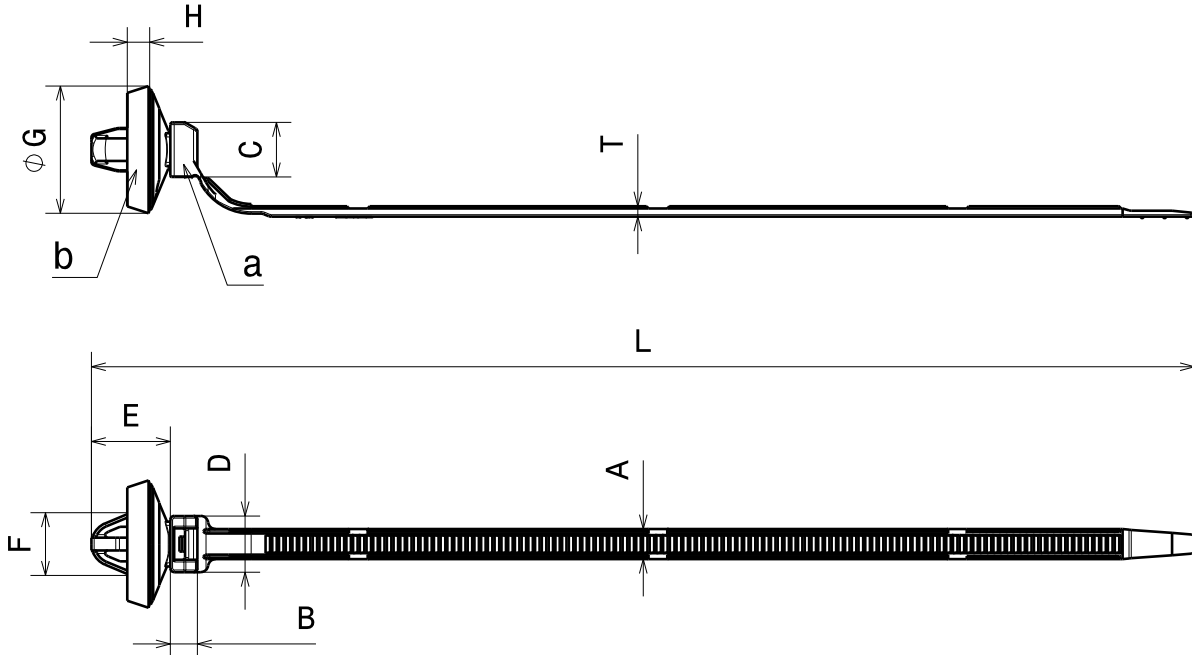



	a.Cable tie OS150 b.Cellular rubber seal being:Water Proof Tie		Revision NO 变更数		Revisions 变更项		Changed 修改者		Date 日期		Approved 确认者		Date 日期			
①			Add informaton		Billy.Zhu		2018.10.29		Kevin.Tang		2018.10.29					
Color 颜色 a. Natural b. Black																
Material 材料 a. PA66 b. INOAC C4305																
Hole Size 适用孔径 Ø 5.8- Ø 6.2mm																
Bundle Dia 捆绑直径 Ø 3- Ø 30mm																
Panel Thickness 适用板厚 0.6-2.3mm																
Min. Loop Tensile Strength 最小环拉力 ① 100N	Note: 1.Unmarked radius is R0.2 2.Parts must be stress free after molding and not show imperfections such as dirt, sinks, flow lines or tool marks ETC. 3.△Represent for important size		Product Code		Temperature Range (After Bundle)		L	T	A	B	C	D	E	F	ØG	H
			OS150-PM6-WPJ		-30℃ -+80℃		150 ± 5	1.4 ± 0.2	4 ± 0.2	3.6 ± 0.2	7.3 ± 0.2	7.5 ± 0.2	10.6 ± 0.2	8 ± 0.2	(17)	(3)
Dimension Units 尺寸单位mm			Drawn/制图		Billy.Zhu		2018-10-23		Scale/比例						1:1	
			Approved/审核		Kevin.Tang		2018-10-23		Title/品名							
									OS150-PM6-WPJ							
PERFORMANCE 性能 SPECIFICATION 标准	The copyright of this drawing is reserved by HellermannTyton. it is issued on condition that it is not reproduced,copied or disclosed to a third party,either wholly or in part, without the consent of HellermannTyton.		HellermannTyton 海尔曼太通（无锡）电器配件有限公司 (WUXI) Electrical Accessories Co.,Ltd. Tel:+86-510-5282536 Fax:+86-510-5280112					Drawing-No/图号						Format/格式		
18-2521-001-CSC								A4								