
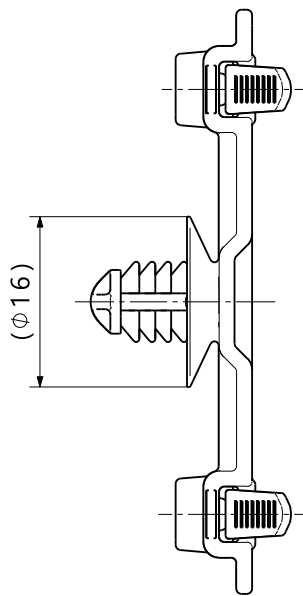
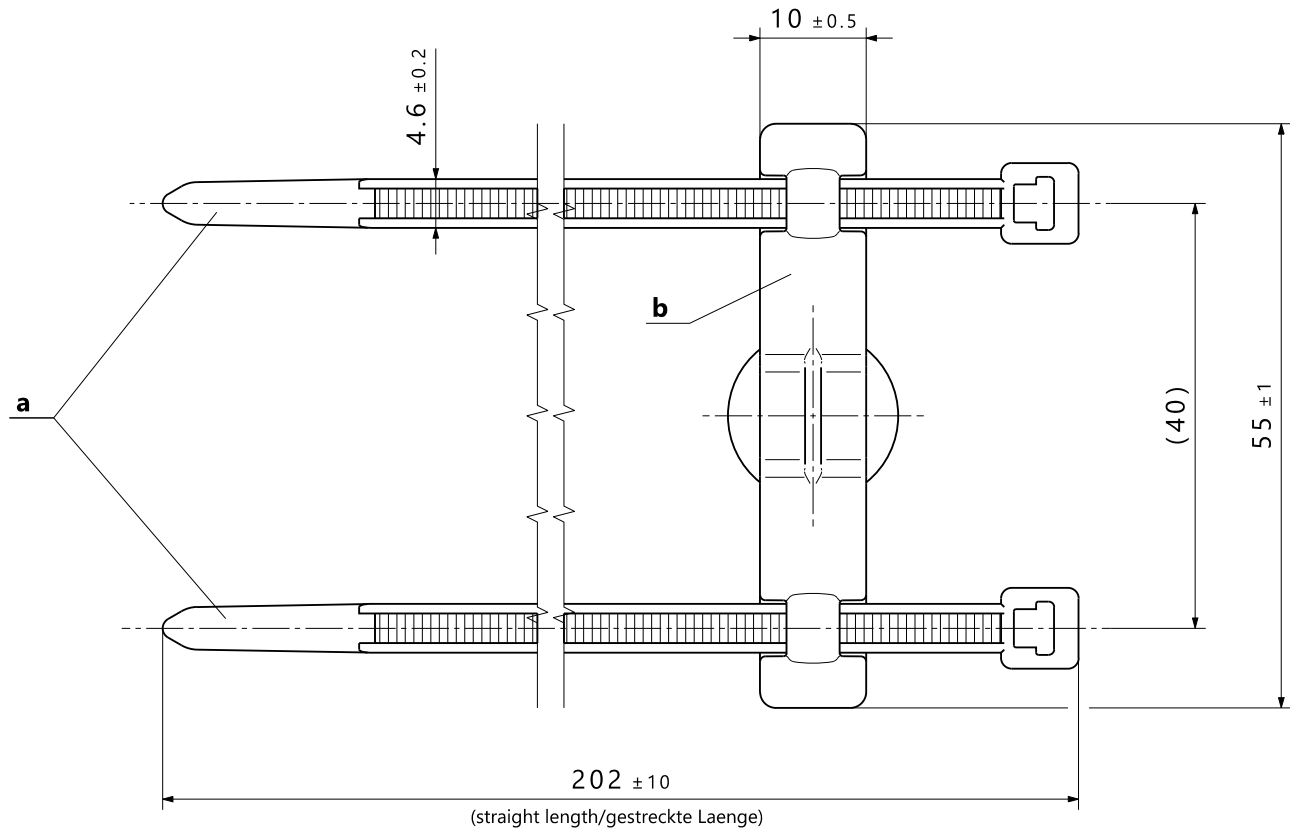
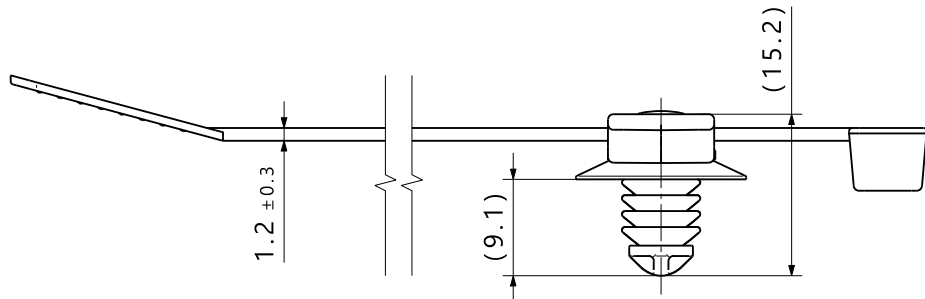


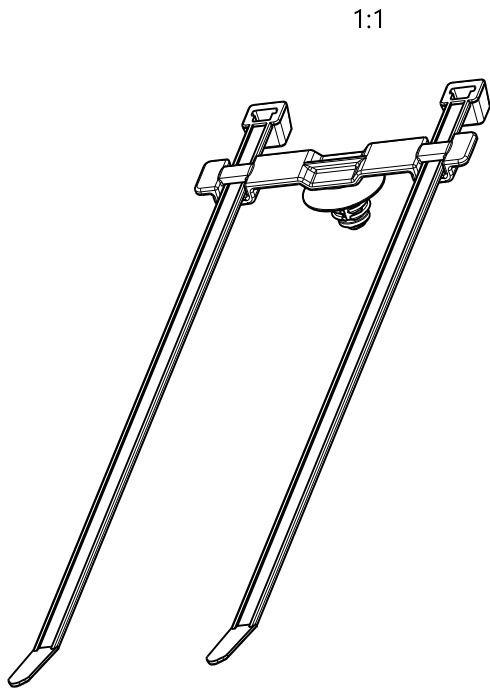

- Specification:
- Performance requirements at equilibrium condition
standard atmosphere 23 °C / 50% RH
 - Material:
 - a: PA6.6 heatstabilized
 - b: PA6.6 heatstabilized impact modified
 - Material color:
 - a: black
 - b: black
 - Bundle Ø: 1 - 45 mm
 - Tensile force: min. 225 N
 - Hole size: 6.5 ± 0.2 mm
 - Panel thickness: 0.7 - 3.0 mm

- Spezifikation:
- Leistungsanforderung im Gleichgewichtszustand
Normalklima 23 °C / 50% RH
 - Material:
 - a: PA6.6 hitzestabilisiert
 - b: PA6.6 hitzestabilisiert schlagzaeh mod.
 - Material Farbe:
 - a: schwarz
 - b: schwarz
 - Buendel Ø: 1 - 45 mm
 - Schlaufenhaltekraft: min. 225 N
 - Loch Ø: 6.5 ± 0.2 mm
 - Blechdicke: 0.7 - 3.0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record											
Drawing	State	Part		The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title	T50RDFt6.5C	Scale	2:1	Global Project Number	18-2577		
00.0	Design Release				I. Langeloh	2022/08/05								
					Approved	Date (YYYY/MM/DD)								
					B. Schiwiek	2022/08/05								
Changed	Date (YYYY/MM/DD)		All drawing revisions are stored in CAD PDM database		HellermannTyton www.HellermannTyton.com			Drawing-No	18-2577-004-CSG	Format	A2	Sheet	1 / 1	
Approved	Date (YYYY/MM/DD)													

Product type/ Artikelbezeichnung	Project no./ Projektnr.	Project no./ Projektnr.	Project no./ Projektnr.
T50RDFT6.5C	GPN 18-2577	X	X

Semi-finished part/ Halbfabrikat	Project no./ Projektnr.	Project no./ Projektnr.	Project no./ Projektnr.
T50R	GPN 12-0123	GPN 21-0473	GPN 21-0473
DFT6.5	a	b	b