






CATIA V5

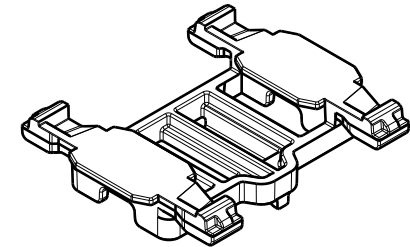

Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
02.1	Design Release	-	SEE ECN# 016844	NHK	01/14/2022	EJF	01/14/2022

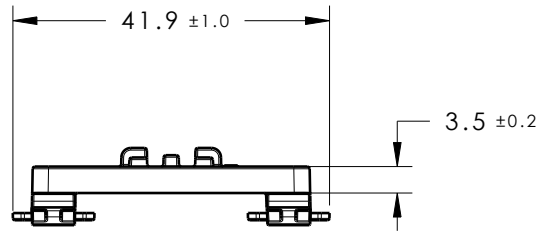

ISOMETRIC VIEW

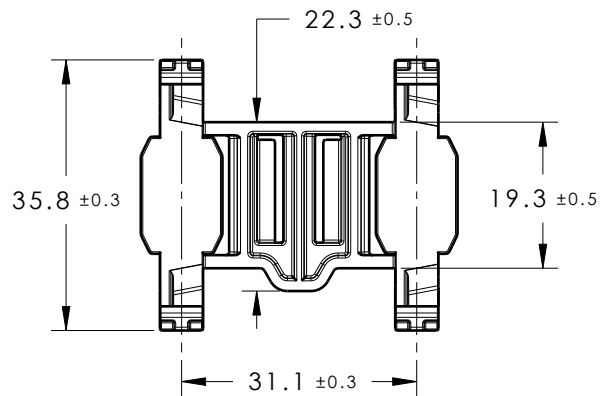

TCA, AND CAVITY ID TO BE SHOWN ON THIS SURFACE

02.1

02.1

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. DESIGNED TO MEET PUSH ON/PULL OFF FORCES OF SAE/USCAR-2
2. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-11 (NOT A TEST SPEC.)
3. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
4. MAX ALLOWABLE FLASH TO BE: 0.25mm
5. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

Material SEE CHART	Units millimeters Tolerance defined on each dimension	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	NHK	1/14/19	Article/Type-No	DBLCC11BRKT	Scale	1:1
			Approved	HDC	1/17/19	Title	DOUBLE 11mm CC WITH 11mm CC FEMALE ADAPTER	Project Number	19-0222
			HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase	Format	AH
						19-0222-001-CSU		Sheet	1/1

GLOBAL PART DESCRIPTION	MATERIAL	COLOR
DBLCC11BRKT-PA66HIRHSUV-BK	PA66HIRHSUV	Black