
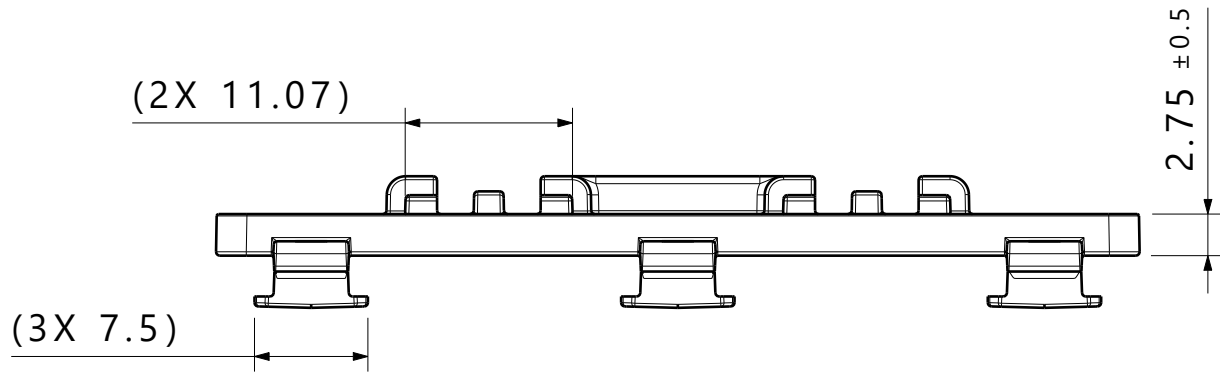
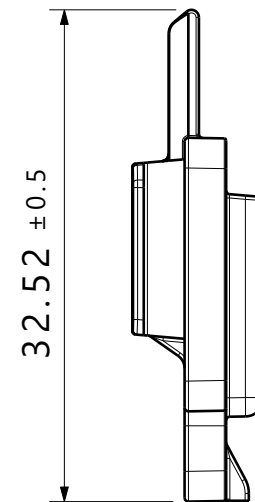


Isometric view
Scale 1:1

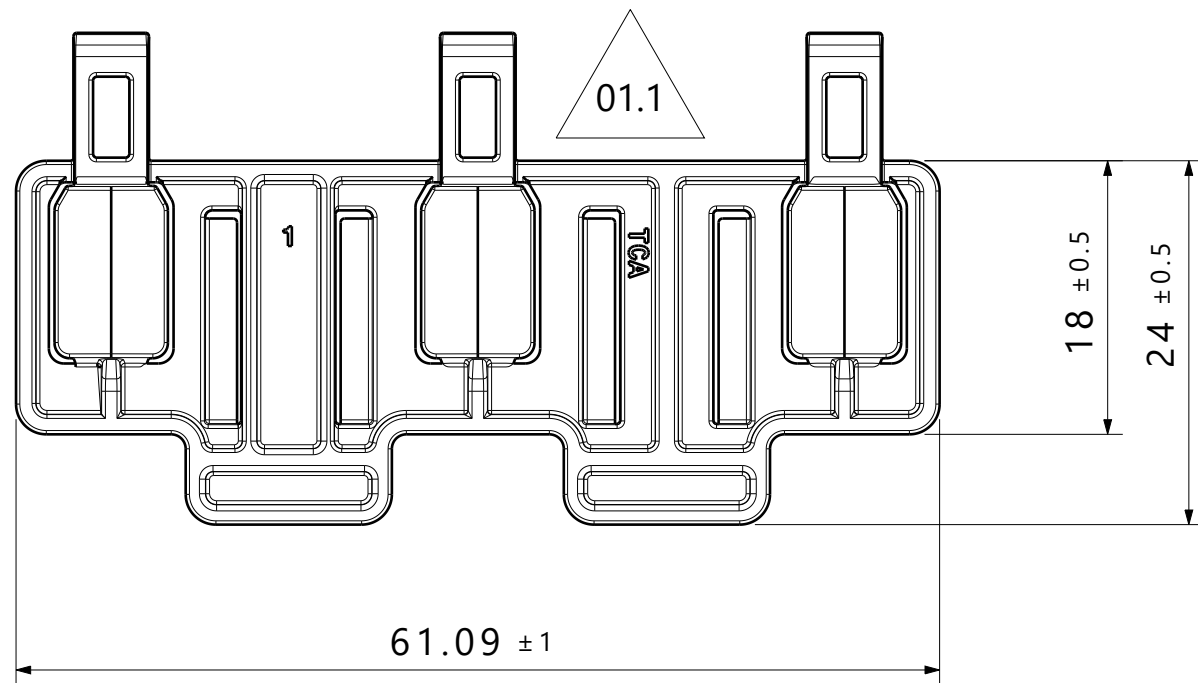

Reference:

Performance requirements at dry as molded:
1. Designed to meet push on/pull off forces
of SAE/USCAR-2.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.5mm
5. Max allowable mismatch to be: 0.1mm
6. Fits into USCAR clip slot specification EWCAP-005-7.

Global Part Description	Material	Color
TRIPLE7CCBRKT-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title Triple connector top with dual EWCAP-005-11 slot				Scale 2:1		
Drawing	State		Part	016506					Karabon		2021/05/18						Global Project Number 19-0350		
01.1		Design Release		-		All drawing revisions are stored in CAD PDM database				Approved		Date (YYYY/MM/DD)		Drawing-No 19-0350-011-CSU				Format A3	
Changed		Date (YYYY/MM/DD)								Fish		2021/05/18						Sheet 1 / 1	
Karabon		2021/05/18																	
Approved		Date (YYYY/MM/DD)																	
Fish		2021/05/18																	
								Units mm		HellermannTyton									
										www.HellermannTyton.com									

Units
mm

HellermannTyton
www.HellermannTyton.com

Drawing-No
19-0350-011-CSU