


1:1

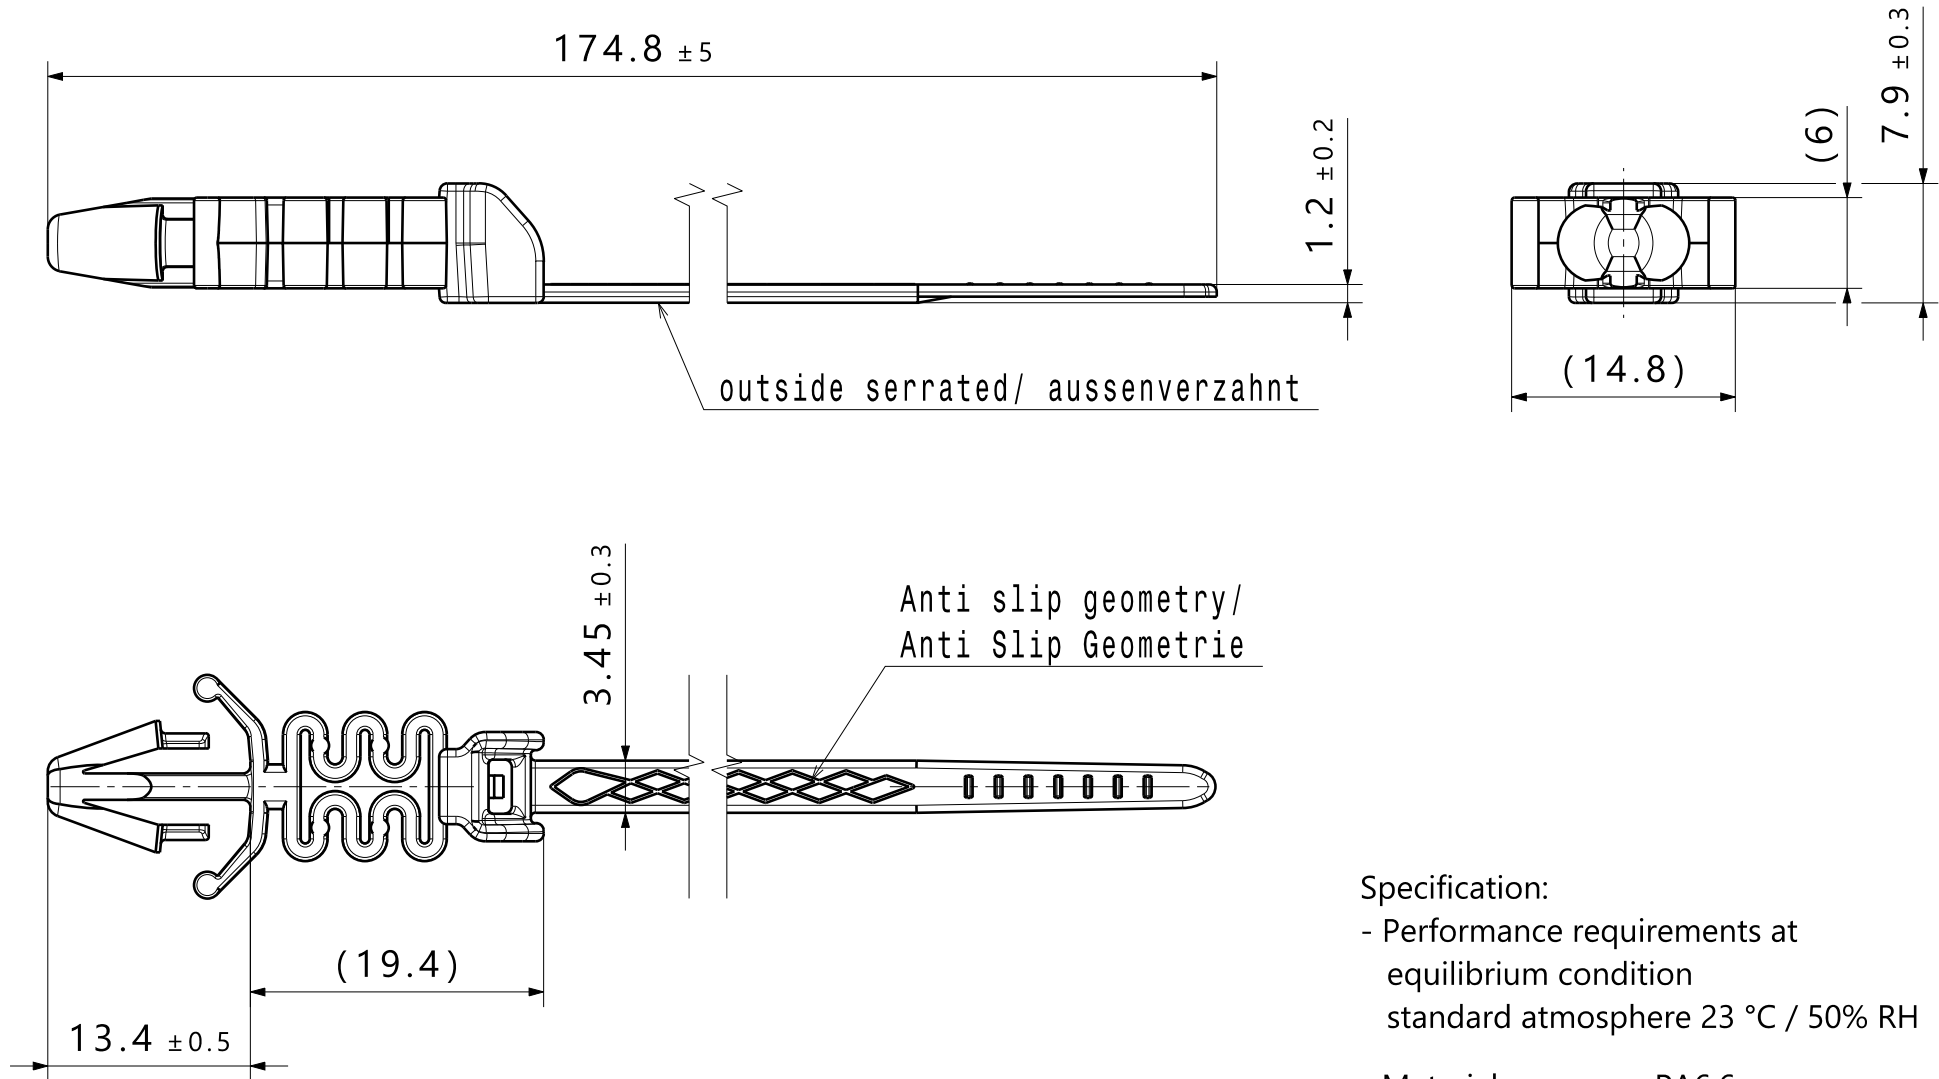

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
- Material: PA6.6 heatstabilized impact modified
- Material color: black
- Bundle Ø: 1 to 35 mm
- Tensile force: 200 N
- Hole size: Ø 6,3 to 6,8 mm
- Panel thickness: 2,6 to 5,0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
- Material: PA6.6 hitzestabilisiert, schlagzaeh modifiziert
- Material Farbe: schwarz
- Buendel Ø: 1 bis 35 mm
- Schlaufenhaltekraft: 200 N
- Loch Ø: Ø 6,3 bis 6,8 mm
- Blechdicke: 2,6 bis 5,0 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record		 All drawing revisions are stored in CAD PDM database	Drawn		Date (YYYY/MM/DD)	Title			Scale
Drawing	State	Part				U. Villbrandt	2022/01/28	T30ROSASVDWPM6.6E			2:1	
00.1	Design Release	00.0				Approved	Date (YYYY/MM/DD)				Global Project Number	
Changed		Date (YYYY/MM/DD)				O. Matz	2022/01/28				19-0967	
Approved		Date (YYYY/MM/DD)	Units mm			HellermannTyton www.HellermannTyton.com			Drawing-No		Format	
									19-0967-001-CSG		A3	
											Sheet	
											1 / 1	