







CATIA V5



Revision Level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.2	Design Release	-	SEE ECN# 015260	HDC	06/28/19	NHK	06/28/19

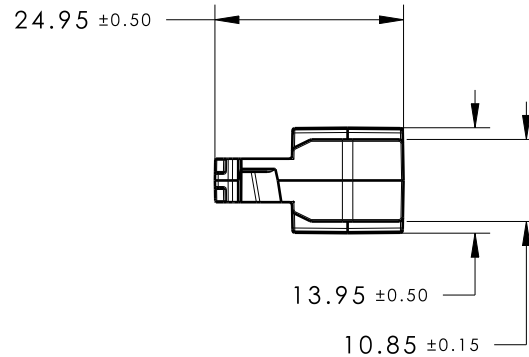

ISOMETRIC VIEW

CAVITY ID TO BE LOCATED
ON THIS SURFACE"TCA" TO BE LOCATED
ON THIS SURFACE

REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. SHEET METAL THICKNESS RANGE: 3.00mm - 6.00mm
2. DESIGNED TO MEET PUSH ON/PULL OFF FORCES OF SAE/USCAR-2
3. FITS INTO USCAR CLIP SLOT SPECIFICATION EWCAP-005-11 (NOT A TEST SPEC.)
4. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
5. MAX ALLOWABLE FLASH TO BE: 0.25mm
6. MAX ALLOWABLE MISMATCH TO BE: 0.10mm

Material SEE CHART COLOR: SEE CHART	Units millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	HDC	06/28/19	Article/Type-No	EC55CC11	Scale	1:1					
	Tolerance defined on each dimension		Approved	NHK	06/28/19	Title	3 - 6mm EC WITH EWCAP-005-11 CONNECTOR CLIP	Project Number	19-1106					
			<div>HellermannTyton</div> <div>North America</div> <div>Email: corp@htamericas.com</div> <div>Web: www.hellermann.tyton.com</div>					Drawing-No	PRODUCTION : Phase	Format	AH			
								<div>19-1106-001-CSU</div>					Sheet	1/1