


Isometric view

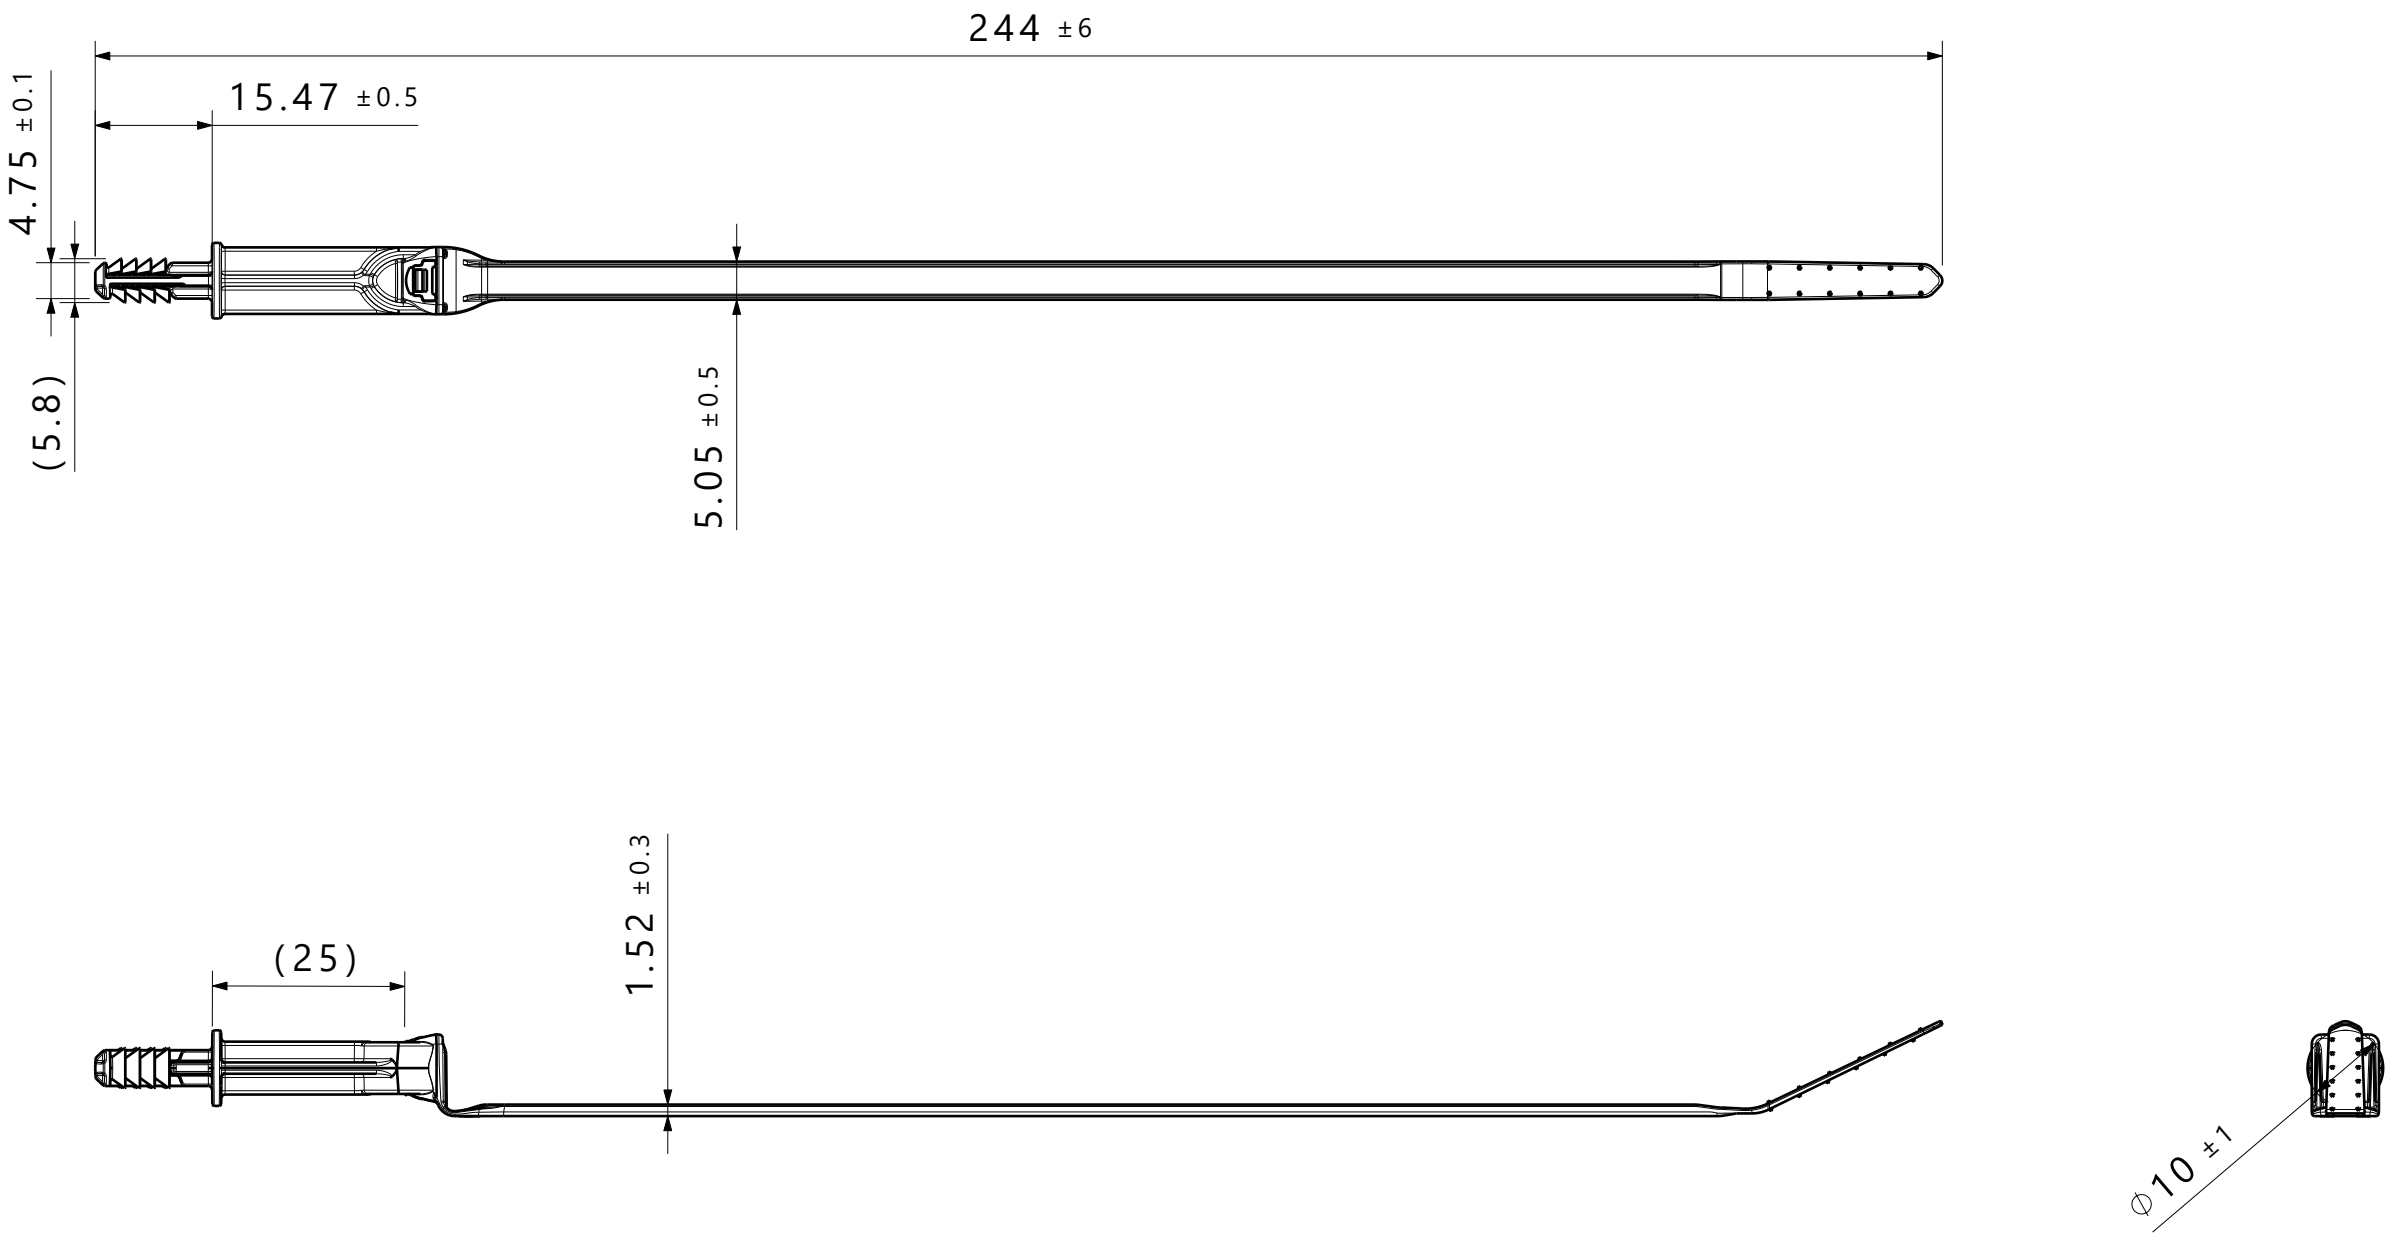

- REFERENCE:
- PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
1. FIR TREE PUSH IN FORCE: 45 NEWTONS (10 LBS) MAX IN THE APPLICABLE NOMINAL HOLE SIZE.
 2. FIR TREE PULL OUT FORCE: 110 NEWTONS (25 LBS) MIN IN THE APPLICABLE NOMINAL HOLE SIZE.
 3. APPLICABLE HOLE SIZE:
A. M6 X1.0
 4. CABLE TIE MIN LOOP TENSILE STRENGTH: 225 NEWTONS (50 LBS)
 5. HAND ASSEMBLED BUNDLE RANGE: 2.0mm TO 50.0mm
APPLICATION TOOL BUNDLE RANGE: 2.0mm TO 45.0mm
 6. MAXIMUM PERCENT REGRIND PERMISSIBLE: 25%
 7. MAX ALLOWABLE FLASH TO BE: 0.25mm
 8. MAX ALLOWABLE MISMATCH TO BE: 0.1mm

Global Part Description	Material	Color
T50ROSFTM625SO-PA66HIRHSUV-BK	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)	Title		
Drawing	State	Part	016362			Camposagrado	2020/07/31	25mm stand off cable tie with M6		Scale 1:1		Global Project Number 19-1380	
02.1	Design Release	-	All drawing revisions are stored in CAD PDM database			Approved	Date (YYYY/MM/DD)	Fish		2020/07/31	Drawing-No 19-1380-001-CSU		
Changed	Date (YYYY/MM/DD)							Format A2					
Duncan	2021/02/25							Sheet 1 / 1					
Approved	Date (YYYY/MM/DD)												
Fish	2021/02/26												
				Units mm	HellermannTyton								
						www.HellermannTyton.com							