

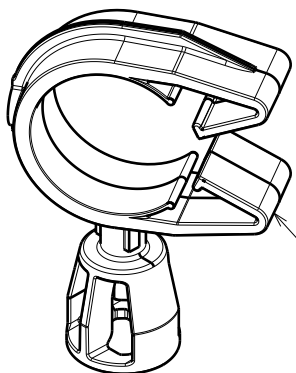
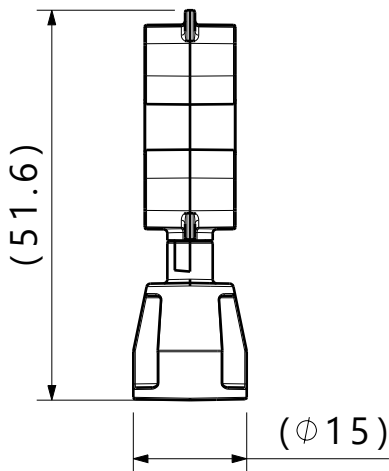


Isometric view

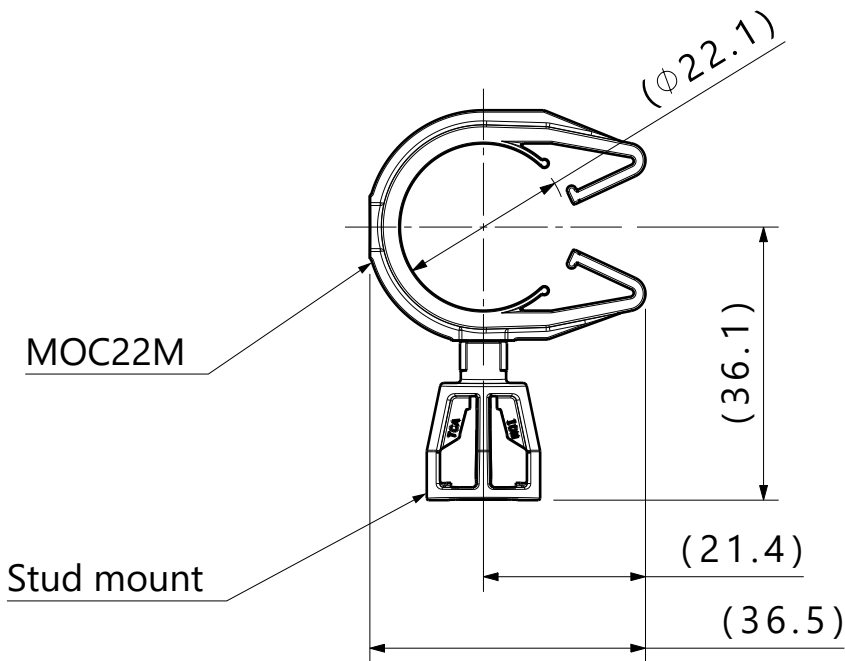

Isometric view
Rotated

Clip rotates
360 degrees

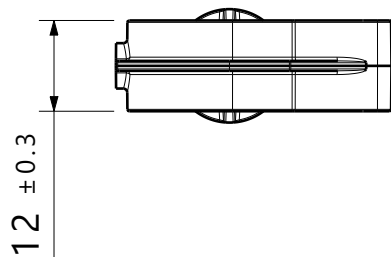

Reference:

Performance requirements at dry as molded:

- 1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
- 2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:

- 1. Material: See chart
- 2. Material color: See chart
- 3. Maximum percent regrind permissible: 25%
- 4. Max allowable flash to be: 0.25mm
- 5. Max allowable mismatch to be: 0.1mm
- 6. Applicable stud size:

- A. M5 x 0.8
- B. T5
- C. M6 x 1
- D. T6

* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D822,476 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
20.0mm-24.0mm	20.0mm-24.0mm	22.0mm-25.0mm

Global Part Description	MOC22M***			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMFMOC22M-PA66HIRHSUV-BK	16-0323-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title			Scale
Drawing	State	Part	ECN 016566	 <th colspan="1">Klos</th> <th colspan="1">2021/09/22</th> <td colspan="1">1:1</td>			Klos	2021/09/22				1:1
00.1	Design Release	-			Approved		Date (YYYY/MM/DD)	MOC22M coupled with a M5/M6 stud mount	Global Project Number			
Changed		Date (YYYY/MM/DD)			Karabon		2021/09/22	19-1648	Format			
Klos		2021/09/22	All drawing revisions are stored in CAD PDM database		Units mm	HellermannTyton www.HellermannTyton.com			Drawing-No	A3		
Approved		Date (YYYY/MM/DD)							19-1648-001-CSU	Sheet		
Karabon		2021/09/22							1 / 1			