

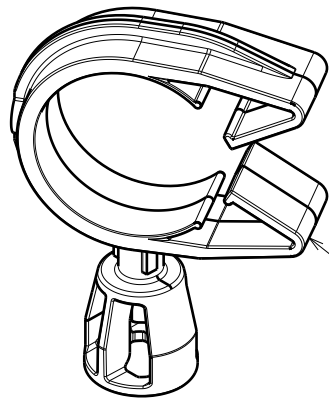
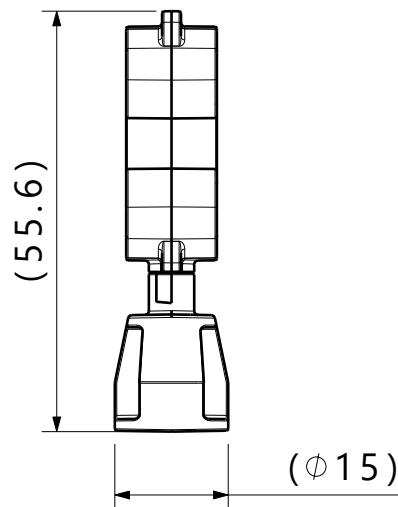


Isometric view

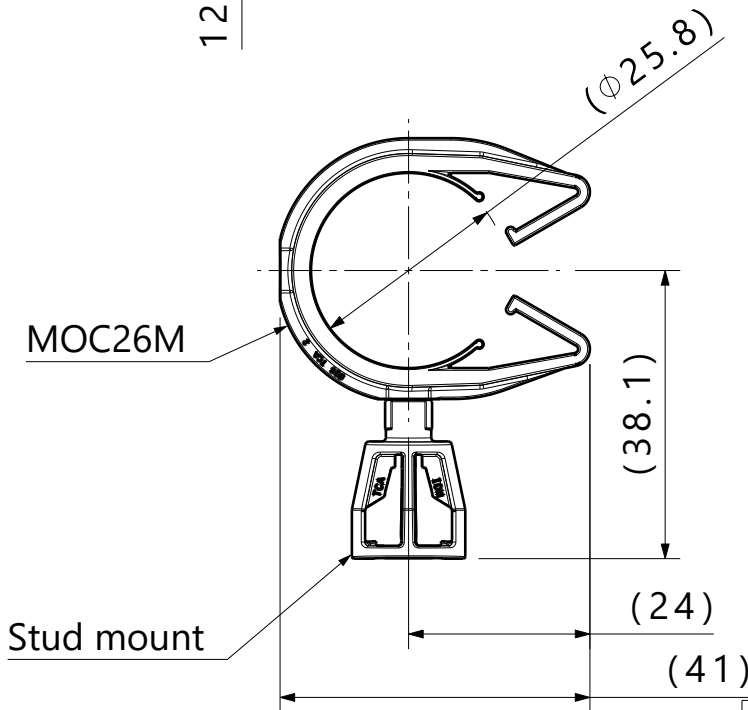

Isometric view
Rotated

Clip rotates
360 degrees

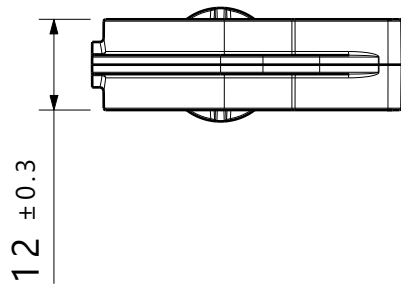

Reference:
Performance requirements at dry as molded:
1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25%
 - 4. Max allowable flash to be: 0.25mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6

* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D822,476 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
23.0mm-28.5mm	23.0mm-28.5mm	25.9mm-29.0mm

Global Part Description		MOC26M***			Stud Mount		
		Drawing	Material	Color	Drawing	Material	Color
SMFMOC26M-PA66HIRHSUV-BK		16-0325-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title MOC26M coupled with a M5/M6 stud mount			Scale
Drawing	State	Part	ECN 016566				Klos	2021/09/22				1:1
00.1	Design Release	-	 All drawing revisions are stored in CAD PDM database				Approved	Date (YYYY/MM/DD)	Drawing-No 19-1649-001-CSU		Global Project Number 19-1649	
Changed		Date (YYYY/MM/DD)					Karabon	2021/09/22			Format A3	
Approved		Date (YYYY/MM/DD)					Units mm www.HellermannTyton.com				HellermannTyton	
Karabon		2021/09/22										