


Isometric view



Clip rotates
360 degrees

Isometric view
Rotated

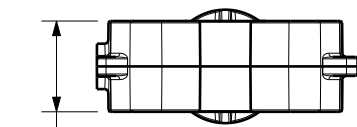


12 ±0.3

MOC26M180

Stud mount


(17)

(34.5)

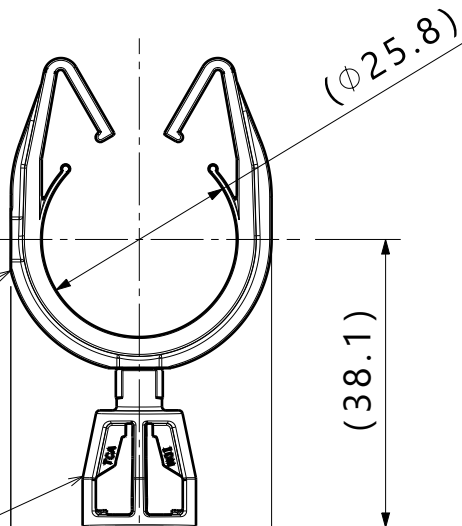

(Φ25.8)

(38.1)

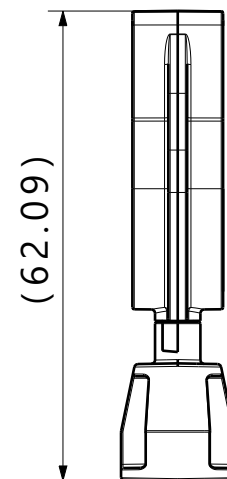

(62.09)

(Φ15)

Reference:

Performance requirements at dry as molded:

1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Applicable stud size:

- A. M5 x 0.8
- B. T5
- C. M6 x 1
- D. T6

* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D822,476 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
23.0mm-28.5mm	23.0mm-28.5mm	25.9mm-29.0mm

Global Part Description	MOC26M180***			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMFMOC26M180-PA66HIRHSUV-BK	16-0325-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title MOC26M180 coupled with a M5/M6 stud mount	Scale 1:1	
Drawing	State	Part	ECN 016595				Klos	2021/09/22		Global Project Number 19-1661	
00.0	Design Release	-			All drawing revisions are stored in CAD PDM database		Approved	Date (YYYY/MM/DD)	Drawing-No 19-1661-001-CSU	Format A3	
Changed	Date (YYYY/MM/DD)						Karabon	2021/09/22		Sheet 1 / 1	
Klos	2021/09/22										
Approved	Date (YYYY/MM/DD)										
Karabon	2021/09/22										