

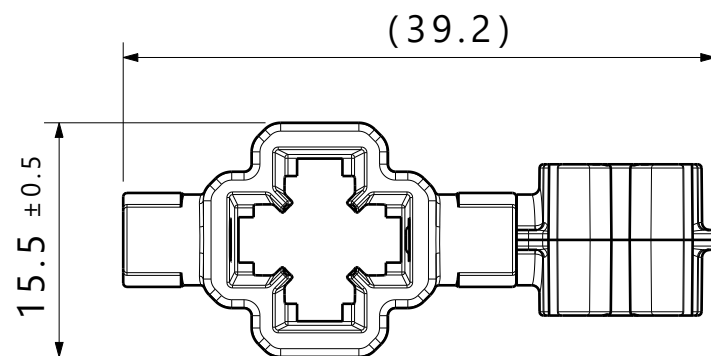


Isometric view
scale 1:1




Isometric view - rotated
scale 1:1

Clip rotates
360 degrees

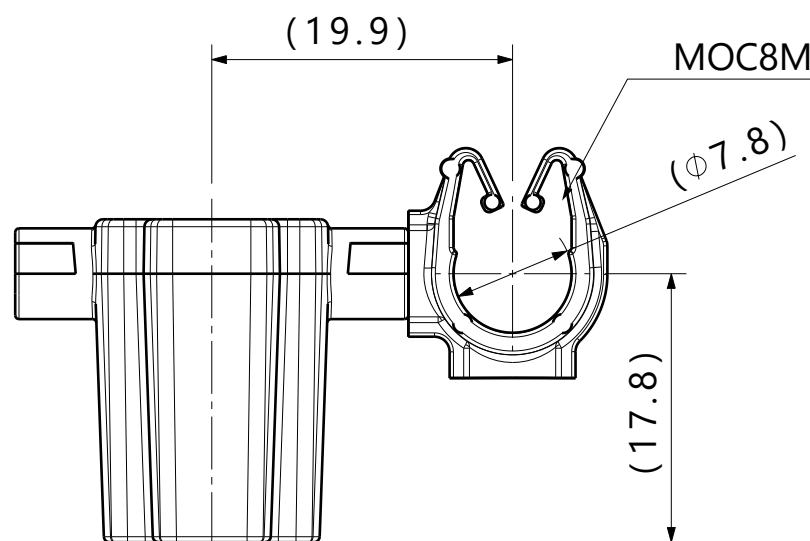

Stud mount

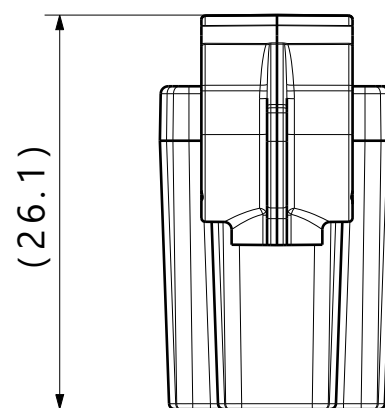

Reference:

Performance requirements at dry as molded
and to be tested at the component level:

1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6

*Rotational orientation of clips upon delivery is not controlled

DIAMETER RANGE*		
HARNESS	HOSE	HARD PIPE/TUBE
7.5MM-8.5MM	7.0MM-8.5MM	7.9MM-8.5MM

*Recommended sizes may differ depending on the application,
product requirements, and materials used.

**Patent: US D822,799 S, EU 003864313, CN 304373914 S

Global Part Description	MOC8M**			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMF2MOC8M-PA66HIRHSUV-BK	16-0316-000-CSU	PA66HIRHSUV	Black	19-0239-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record				Drawn		Date (YYYY/MM/DD)		Title MOC8M coupled with a M5/M6 stud mount		Scale		
Drawing	State	Part	ECN 016509				Rohde		2021/05/19				2:1		
00.3	Design Release	-			All drawing revisions are stored in CAD PDM database		Approved		Date (YYYY/MM/DD)		Drawing-No 19-1669-001-CSU		Global Project Number		
Changed		Date (YYYY/MM/DD)		Karabon			2021/05/19		19-1669						
Rohde		2021/05/21							Format						
Approved		Date (YYYY/MM/DD)							A3						
Karabon		2021/05/21										Sheet		1 / 1	
						Units mm		HellermannTyton							
								www.HellermannTyton.com							

Units
mm
HellermannTyton
www.HellermannTyton.com

Drawing-No
19-1669-001-CSU