




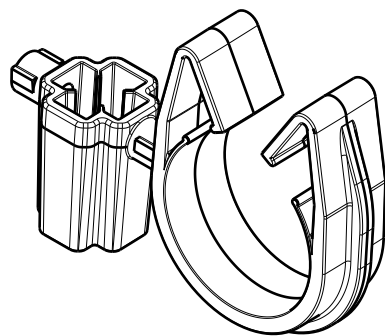


Isometric view

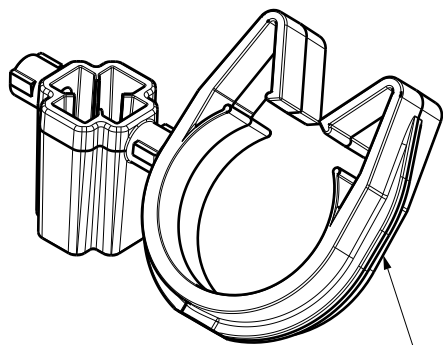


Isometric view
Rotated

Clip rotates
360 degrees

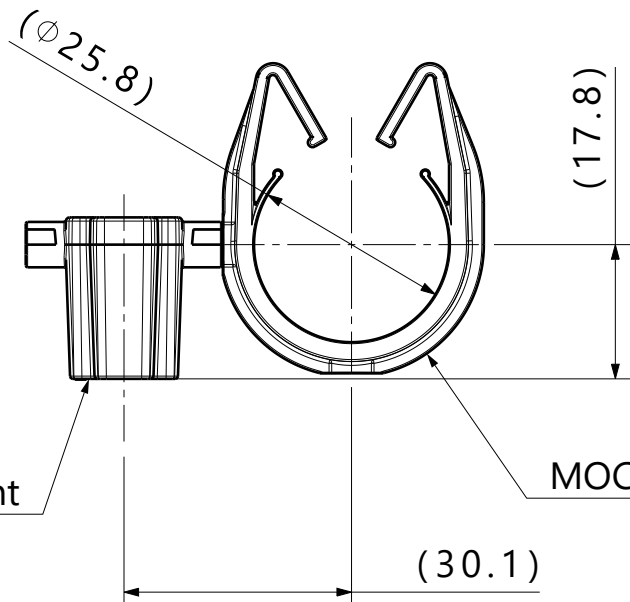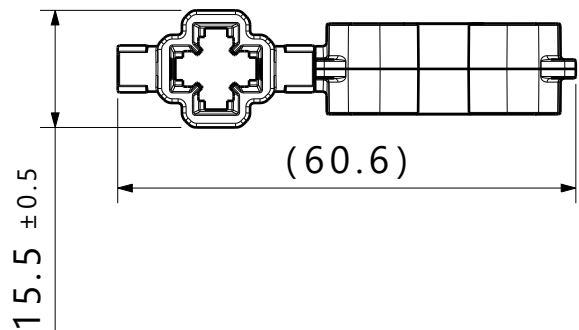

Stud Mount

MOC26M




- Reference:
- Performance requirements at dry as molded:
- 1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
 - 2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25%
 - 4. Max allowable flash to be: 0.25mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6
- * Recommended sizes may differ depending on the application, product requirements, and materials used.
- ** Rotational orientation of clips upon delivery is not controlled
- *** Patent: US D822,476 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
23.0mm-28.5mm	23.0mm-28.5mm	25.9mm-29.0mm

Global Part Description	MOC26M***			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMF2MOC26M-PA66HIRHSUV-BK	16-0325-000-CSU	PA66HIRHSUV	Black	19-0239-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title MOC26M coupled with a M5/M6 stud mount			Scale	1:1
Drawing	State	Part	ECN 016566	Klos			2021/09/22	Global Project Number				19-1677	
00.1	Design Release	-		Approved	Date (YYYY/MM/DD)		Format	A3					
Changed	Date (YYYY/MM/DD)	All drawing revisions are stored in CAD PDM database		Karabon	2021/09/22		Drawing-No	19-1677-001-CSU <th>Sheet</th> <td>1 / 1</td>	Sheet	1 / 1			
Klos	2021/09/22			Units	HellermannTyton	www.HellermannTyton.com							
Approved	Date (YYYY/MM/DD)			mm									
Karabon	2021/09/22												

HellermannTyton
www.HellermannTyton.com

Drawing-No
19-1677-001-CSU