


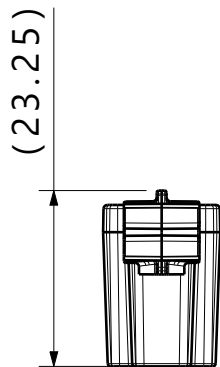


Isometric view

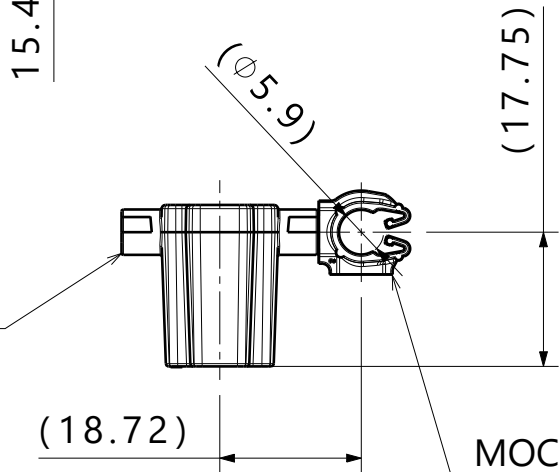

Clip rotates
360 degrees

Isometric view
Rotated

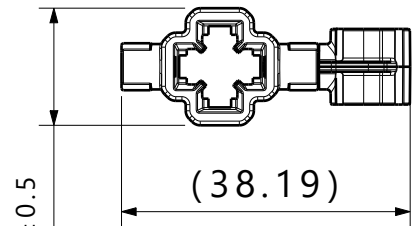

Stud mount

MOC6M180

Reference:
Performance requirements at dry as molded:
1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25%
 - 4. Max allowable flash to be: 0.25mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6
- * Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D840,799 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
5.5mm-6.5mm	5.5mm-6.5mm	6.0mm-6.8mm

Global Part Description	MOC6M180***			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMF2MOC6M180-PA66HIRHSUV-BK	16-0314-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record		 	The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title		Scale
Drawing	State	Part	ECN 016595				Klos	2021/09/22			
00.2	Design Release	-			All drawing revisions are stored in CAD PDM database	HellermannTyton.	Approved	Date (YYYY/MM/DD)	MOC6M180 coupled with a M5/M6 stud mount		Global Project Number
Changed		Date (YYYY/MM/DD)		Karabon			2021/09/22 <td>19-1679</td>	19-1679			
Klos		2021/09/22					Drawing-No	19-1679-001-CSU	Format		
Approved		Date (YYYY/MM/DD)								A3	
Karabon		2021/09/22								Sheet	
						Units	HellermannTyton www.HellermannTyton.com				1 / 1
						mm					