




Isometric view

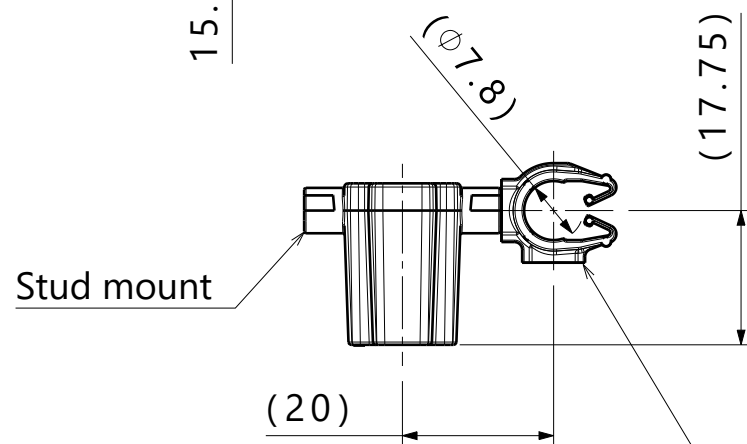


Isometric view
Rotated

Clip rotates
360 degrees

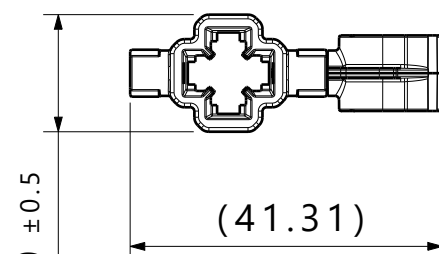

Stud mount

MOC8M180

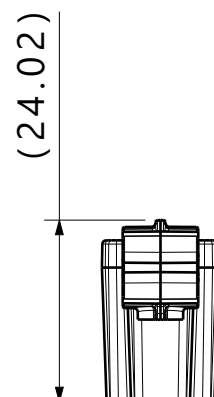

Reference:

Performance requirements at dry as molded:

1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Applicable stud size:
 - A. M5 x 0.8
 - B. T5
 - C. M6 x 1
 - D. T6


* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D840,799 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
7.5mm-8.5mm	7.0mm-8.5mm	7.9mm-8.5mm

Global Part Description	MOC8M180***			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMF2MOC8M180-PA66HIRHSUV-BK	16-0316-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title MOC8M180 coupled with a M5/M6 stud mount		Scale	Global Project Number 19-1681
Drawing	State	Part	ECN 016595			All drawing revisions are stored in CAD PDM database		Klos	2021/09/22			1:1	
00.0	Design Release	-			Approved			Date (YYYY/MM/DD)	Drawing-No 19-1681-001-CSU		Format	A3	
Changed	Date (YYYY/MM/DD)				Karabon			2021/09/22			Sheet		1 / 1
Klos	2021/09/22												
Approved	Date (YYYY/MM/DD)												
Karabon	2021/09/22												