




Isometric view

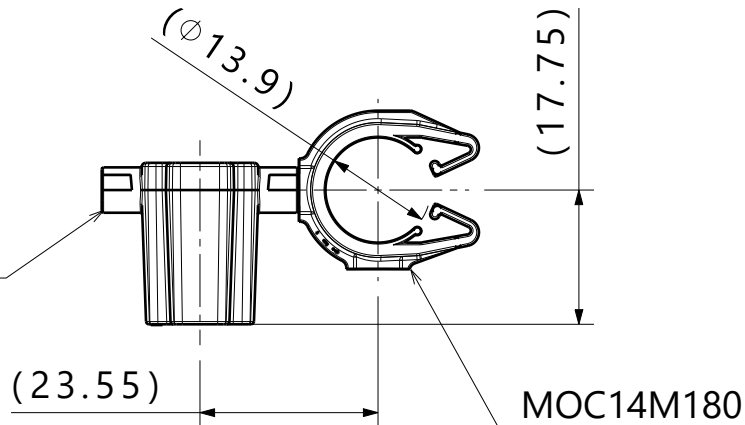


Isometric view
Rotated

Clip rotates
360 degrees

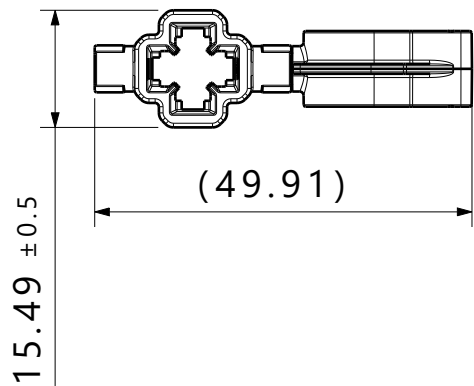

Stud mount

MOC14M180

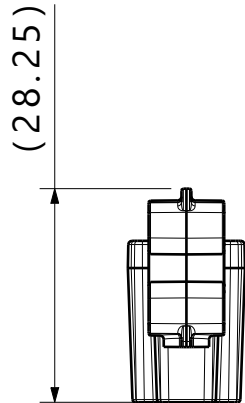

Reference:
Performance requirements at dry as molded:
1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:
1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Applicable stud size:
A. M5 x 0.8
B. T5
C. M6 x 1
D. T6

* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

*** Patent: US D822,476 S, EU 003864313, CN 304373914 S

Diameter Range*		
Harness	Hose	Hard Pipe/Tube
13.0mm-15.0mm	13.0mm-15.0mm	14.0mm-15.8mm

Global Part Description	MOC14M180***			Stud Mount		
	Drawing	Material	Color	Drawing	Material	Color
SMF2MOC14M180-PA66HIRHSUV-BK	16-0320-000-CSU	PA66HIRHSUV	Black	19-0295-001-CSU	PA66HIRHSUV	Black

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title MOC14M180 coupled with a M5/M6 stud mount		Scale	1:1						
Drawing	State	Part	ECN 016595					Klos	2021/09/22	Global Project Number			19-1685							
00.1	Design Release	-						Approved	Date (YYYY/MM/DD)	Format	A3									
Changed		Date (YYYY/MM/DD)						All drawing revisions are stored in CAD PDM database					Karabon	2021/09/22	Drawing-No	19-1685-001-CSU	Sheet	1 / 1		
Klos		2021/09/22											Units		HellermannTyton www.HellermannTyton.com					
Approved		Date (YYYY/MM/DD)											mm							
Karabon		2021/09/22																		