






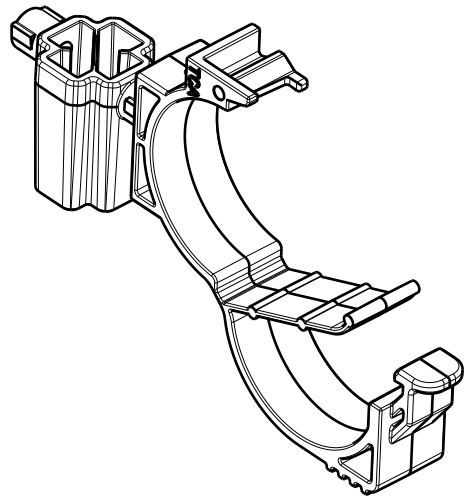


Isometric view

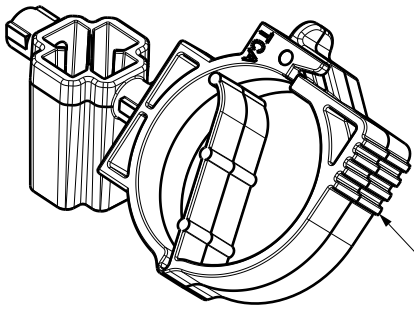

Isometric view
Closed & rotated

Clip rotates
360 degrees

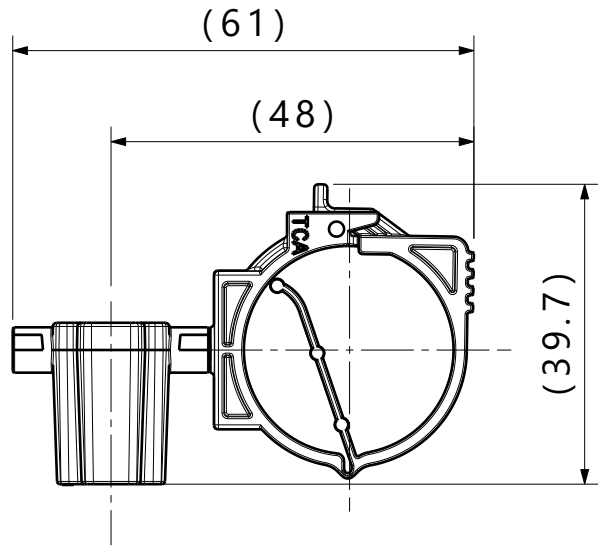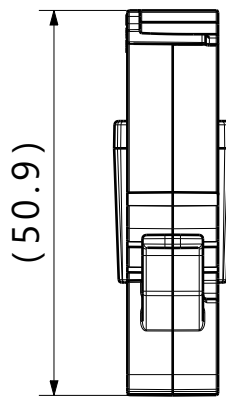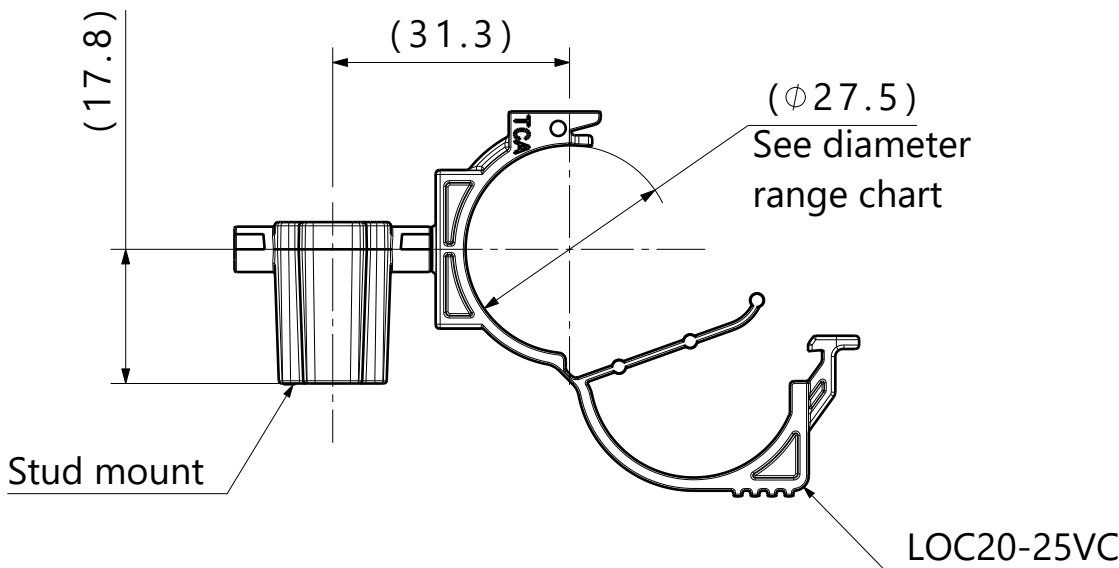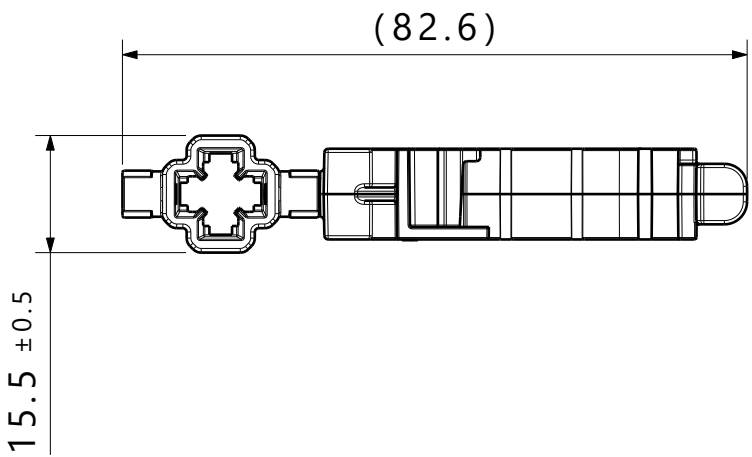

LOC in closed position

Reference:
Performance requirements at dry as molded:
1. Stud mount push on force: 45 newtons (10 lbf) max on each applicable stud size.
2. Stud mount pull off force: 110 newtons (25 lbf) min on each applicable stud size.

Notes:
1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Max allowable flash to be: 0.25mm
5. Max allowable mismatch to be: 0.1mm
6. Applicable stud size:
A. M5 x 0.8
B. T5
C. M6 x 1
D. T6
* Recommended sizes may differ depending on the application, product requirements, and materials used.

** Rotational orientation of clips upon delivery is not controlled

Diameter Range*		
Harness	Sof tube/Hose	Pipe, Hard tube/ Hose, Cable
20.0mm-25.0mm	20.0mm-25.0mm	21.0mm-25.0mm

Global Part Description	LOC20-25VC			Stud Mount		
				Drawing	Material	Color
SMF2LOC20-25VC-PA66HIRHSUV-BK			12-0631-051-CSU	PA66HIRHSUV	Black	19-0239-001-CSU

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.			Drawn		Date (YYYY/MM/DD)		Title LOC20-25VC coupled with a M5/M6 stud mount			Scale 1:1	
Drawing	State	Part	ECN 016566				All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com	Klos		2021/09/22					Global Project Number 19-1693	
00.2	Design Release	-				Approved				Date (YYYY/MM/DD)		2021/09/22		Drawing-No 19-1693-001-CSU		Format A2		
Changed	Date (YYYY/MM/DD)					Karabon				2021/09/22				Sheet 1 / 1				
Klos			2021/09/22															
Approved			Date (YYYY/MM/DD)															
Karabon			2021/09/22															