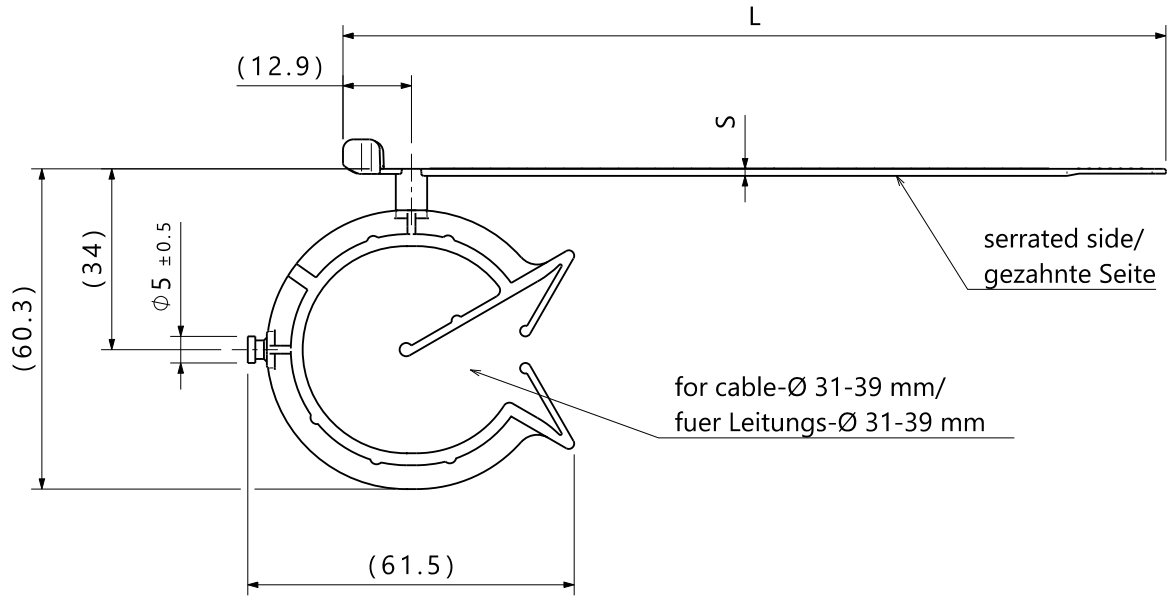
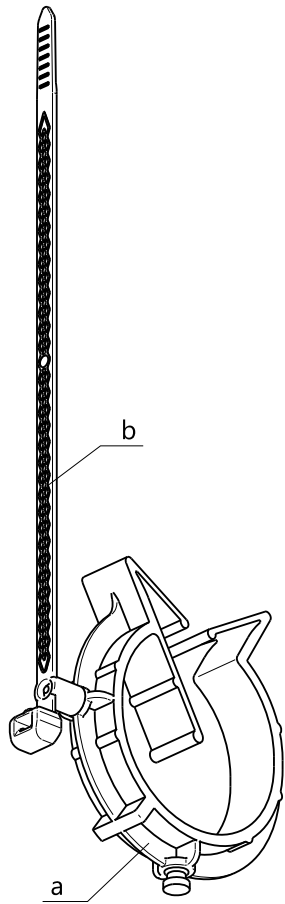


- Specification:

 - Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH
 - Material: a: PA6.6 impact resistant heatstabilized
b: PA6.6 impact resistant heatstabilized
 - Material color: a: black
b: black
- Spezifikation:

 - Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH
 - Material: a: PA6.6 schlagzaeh hitzestabilisiert
b: PA6.6 schlagzaeh hitzestabilisiert
 - Material Farbe: a: schwarz
b: schwarz

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Line/ Zeile	Product type/ Artikelbezeichnung	Project no./ Projektnr.	Length/ Laenge L	Strap width/ Bandbreite B	Thickness/ Dicke S	Bundle/ Buendel Ø	Tensile force/ Schlaufenhaltekraft N min.	Project no./ Projektnr.		
								Semi-finished part/ Halbfabrikat	a	b
1	T50SOSASVCOC31-39	GPN 19-1972	155 ±5	4.6 ±0.2	1.3 ±0.2	2-35	200	OC31-39	NT 210-06	GPN 17-2290